


* BRIDGE #68 TOTAL BILL OF MATERIAL														
BRIDGE	INCIDENTAL MILLING	ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B	ASPHALT BINDER FOR PLANT MIX	MOBILIZATION	GROOVING BRIDGE DECK	CLASS II SURFACE PREPARATION	SHOTCRETE REPAIRS	EPOXY RESIN INJECTION	REMOVAL OF EXISTING FENDER SYSTEM	SILICONE JOINT SEALANT	6" X 10" PLASTIC LUMBER	4" X 6" PLASTIC LUMBER	2" X 12" PLASTIC LUMBER	2" X 6" PLASTIC LUMBER
CARTERET #68	SY	TONS	TONS	LUMP SUM	SF	SY	CF	LF	LUMP SUM	LF	LF	LF	LF	LF
TOTAL	455.4	38.3	2.3	LUMP SUM	218,738	17.6	91.9	897	LUMP SUM	280.3	448	336	1,045.3	1,792

* BRIDGE #68 TOTAL BILL OF MATERIAL														
BRIDGE	BRIDGE JOINT REMOVAL	WIRE ROPE FOR FENDER SYSTEM	14" COMPOSITE PILE	10" X 10" COMPOSITE LUMBER	PILE ENCAPSULATION	PPC MATERIALS	PRESTRESSED CONCRETE GIRDER REPAIR	HARDWARE	EPOXY COATING	TSA, FULL LENGTH (MONITORING)	TSA, FULL LENGTH (NON-MONITORING)	TSA, PARTIAL LENGTH (MONITORING)	TSA, PARTIAL LENGTH (NON-MONITORING)	SCARIFYING BRIDGE DECK
CARTERET #68	LF	LF	LF	LF	LF	CY	CF	LBS.	SF	SF	SF	SF	SF	SY
TOTAL	280.3	3,680	10,440	4,032	480.0	714.2	880.6	24,302	15,615	773.8	45717.8	393.4	13050.7	25,722

* BRIDGE #68 TOTAL BILL OF MATERIAL								
BRIDGE	PLACING AND FINISHING PPC OVERLAY	SHOTBLASTING BRIDGE DECK	BRIDGE JACKING FOR SPAN RE-POSITIONING	SPAN RE-POSITIONING	REPLACEMENT OF BRIDGE BEARINGS TYPE (P1)	REPLACEMENT OF BRIDGE BEARINGS TYPE (P2)	REPLACEMENT OF BRIDGE BEARINGS TYPE (P3)	SPLICING OF PRESTRESSING STRAND
CARTERET #68	SY	SY	EACH	EACH	EACH	EACH	EACH	EACH
TOTAL	25,722	25,722	2	2	8	10	10	20

* EXCLUDES TOTAL BILL OF MATERIAL FOR BRIDGE LIGHTING. FOR BRIDGE LIGHTING BILL OF MATERIAL, SEE SHEET L-1

PROJECT NO. B-5938
CARTERET COUNTY
 BRIDGE NO. 68

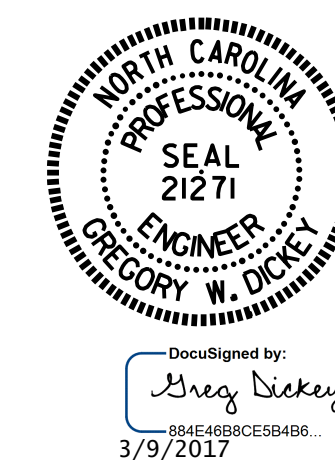

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

TOTAL BILL OF MATERIAL

DRAWN BY : M.A.LEE DATE : 2/2017
 CHECKED BY : G.W.DICKEY DATE : 2/2017

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			S1-1
2			4			-