


SUMMARY OF QUANTITIES

	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	25,722 SY	
CLASS II SURFACE PREPARATION	17.59 SY	
SHOTBLASTING BRIDGE DECK	25,722 SY	
PPC MATERIALS	714.22 CY	
PLACING & FINISHING PPC OVERLAY	25,722 SY	
BRIDGE DECK GROOVING	218,738.35 SF	

NOTES:

FOR SECTION A-A, B-B, AND C-C SEE "JOINT DETAILS" SHEET.

UNSOUD CONCRETE SHALL BE REMOVED PRIOR TO PPC OVERLAY PLACEMENT.

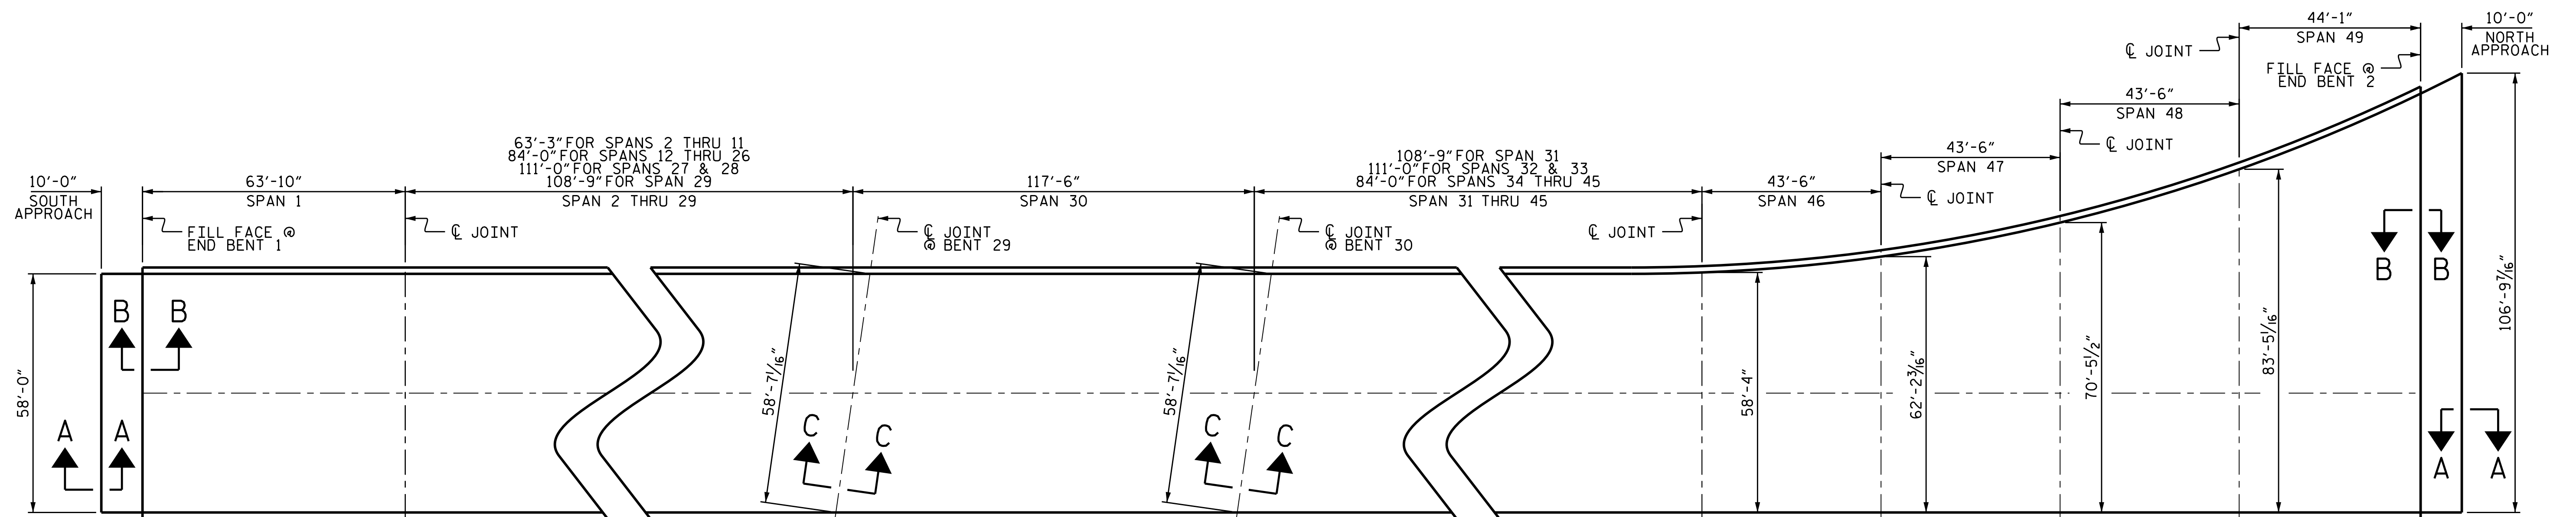


PLAN

ANTICIPATED CLASS II DECK REPAIR LOCATIONS					
SPAN	LOCATION (SEE NOTES)		REPAIR SIZE L X W	QUANTITIES	
	LENGTH ALONG SPAN	DISTANCE FROM RT GTR LINE		EST. SF	ACTUAL SF
24	15'	43'	6'-0" X 2"	1.0	
28	30'	52'	4'-0" X 4'-0"	16.0	
29	AT BENT 29	0'	58'-7 1/16" X 6"	29.3	
30	AT BENT 29	0'	58'-7 1/16" X 6"	29.3	
30	AT BENT 30	0'	58'-7 1/16" X 6"	29.3	
31	AT BENT 30	0'	58'-7 1/16" X 6"	29.0	
36	AT BENT 35	0'	4'-0" X 6'-0"	24.0	
39	AT BENT 38	48'	8" X 2"	0.1	

PROJECT NO. B-5938
CARTERET COUNTY
 BRIDGE NO. 68

SHEET 2 OF 4

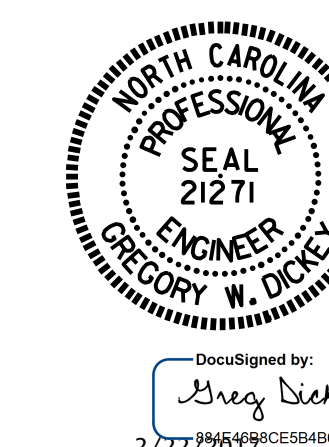

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 SURFACE PREPARATION
 AND
 PPC OVERLAY

DRAWN BY : M.A. LEE DATE : 1/2017
 CHECKED BY : G.W. DICKEY DATE : 1/2017

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S1-6
1			3			TOTAL SHEETS
2			4			-