

TEMPORARY SHORING LOCATION NO. ⑦
 -L- 168+00± (0.0' RT) TO -L- 168+50± (0.0' RT)

ESTIMATED QUANTITY = 1050.0 SF

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

TEMPORARY SHORING IS REQUIRED FOR THE PIPE INSTALLATION FROM STATION -L-168+00+/-,0'RT, TO STATION -L-168+50+/-,0'RT.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -L-168+00+/-,0'RT, TO STATION -L-168+50+/-, 0' RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

UNIT WEIGHT, (γ) = 120 LB/CF
 FRICTION ANGLE, (ϕ) = 30 DEGREES
 COHESION, c = 0 LB/SF
 GROUNDWATER ELEVATION =895FT

LIMITED SUBSURFACE INFORMATION IS AVAILABLE IN THE VICINITY OF TEMPORARY SHORING FROM STATION -L-168+00+/-,0'RT, TO STATION -L-168+50+/-, 0'RT. THE INFORMATION PROVIDED FOR TEMPORARY SHORING DESIGN WAS ASSUMED AND MAY NOT BE APPLICABLE TO THE ACTUAL SITE CONDITIONS ENCOUNTERED DURING CONSTRUCTION.

AT THE CONTRACTOR'S OPTION, USE A STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -L-168+00+/-, 0' RT, TO STATION -L-168+500+/-,0'RT. SEE STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

TEMPORARY SHORING LOCATION NO. ⑧
 -L- 168+00± (7.0' RT) TO -L- 168+50± (7.0' RT)

ESTIMATED QUANTITY = 950.0 SF

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

TEMPORARY SHORING IS REQUIRED FOR THE PIPE INSTALLATION FROM STATION -L-168+00+/-,7'RT, TO STATION -L-168+50+/-,7'RT.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -L-168+00+/-,7'RT, TO STATION -L-168+50+/-, 7' RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

UNIT WEIGHT, (γ) = 120 LB/CF
 FRICTION ANGLE, (ϕ) = 30 DEGREES
 COHESION, c = 0 LB/SF
 GROUNDWATER ELEVATION =895FT

LIMITED SUBSURFACE INFORMATION IS AVAILABLE IN THE VICINITY OF TEMPORARY SHORING FROM STATION -L-168+00+/-,7'RT, TO STATION -L-168+50+/-, 7'RT. THE INFORMATION PROVIDED FOR TEMPORARY SHORING DESIGN WAS ASSUMED AND MAY NOT BE APPLICABLE TO THE ACTUAL SITE CONDITIONS ENCOUNTERED DURING CONSTRUCTION.


10/3/2016
 U:\TrafficControl\TCP\PLAN SHEETS\R-3100A_TC_TMP_02D_TEMPORARY_SHORING_NOTES.dgn
 angood

THE TEMPORARY SHORING NOTES SHOWN ON THIS SHEET WERE PROVIDED THROUGH A SEALED DOCUMENT FROM THE GEOTECHNICAL ENGINEER. THE DOCUMENT WAS CREATED ON (JUNE 14, 2016) AND SEALED BY A PROFESSIONAL ENGINEER, SHIPING YANG, LICENSE #031361.




Stantec Consulting Services Inc.
 801 Jones Franklin Road
 Suite 300
 Raleigh, NC 27606
 Tel. 919.851.6866
 Fax. 919.851.7024
 www.stantec.com
 License No. F-0672

DocuSigned by:
 Betsy L. Watson
 35E67885E09745F

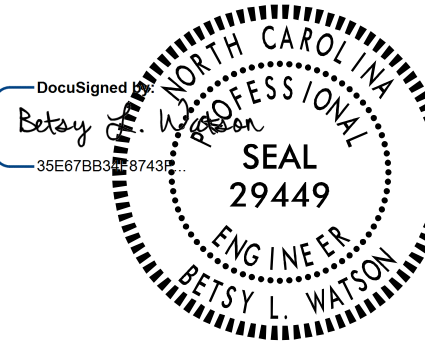

10/3/2016

DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED

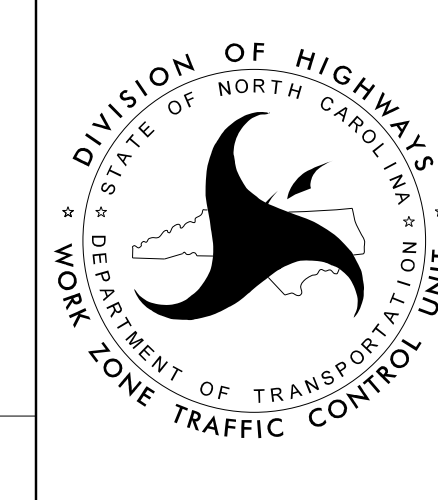

TEMPORARY SHORING
 NOTES