DocuSign Envelope ID: A59C3A03-463B-4FA2-A07E-24920C97CE1F

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(set switches as shown)

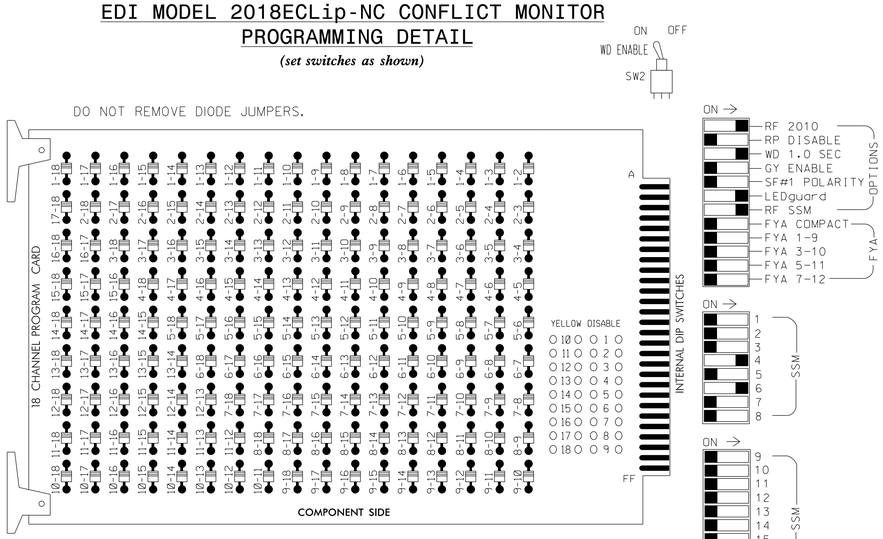

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

■ = DENOTES POSITION OF SWITCH

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Enable Simultaneous Gap-Out for all phases.
3. Program phase 6 for Variable initial and Gap Reduction.
4. Program phase 6 for Start Up In Green.
5. Program phase 6 for Yellow Flash.
6. The cabinet and controller are part of the Rocky Mount Signal System.

EQUIPMENT INFORMATION

CONTROLLER.....2070E
CABINET.....332
SOFTWARE.....ECONOLITE OASIS
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS...12
LOAD SWITCHES USED.....S5.S8.
PHASES USED.....4.6.
OVERLAP "A".....NOT USED
OVERLAP "B".....NOT USED
OVERLAP "C".....NOT USED
OVERLAP "D".....NOT USED

PROJECT REFERENCE NO.	SHEET NO.
U-3330	Sig. 3.1

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED
SIGNAL HEAD NO.	NU	NU	NU	NU	41,42	NU	NU	61,62	NU	NU	NU	NU
RED					101			134				
YELLOW								135				
GREEN								136				
RED ARROW												
YELLOW ARROW					102							
GREEN ARROW					103							

NU = Not Used

EMERGENCY VEHICLE PREEMPTION PROGRAMMING DETAIL

(program controller as shown below)

From Main Menu press 'A' (Preemption), then '1' (Standard Preemptions). Press 'NEXT' to advance to Preemption #3.

```
    PREEMPTION  #3   SETTINGS (NEXT:1-10)
INTERVAL/TIMING     |  CLEAR/DWELL PHASES
  GRN YEL  RED      |12345678910111213141516
1 255  0.0  0.0     |      X
2   0  0.0  0.0     |
3   0  0.0  0.0     |
4   0  0.0  0.0     |
5   0  0.0  0.0     |
EXIT CALLS          |
          OPTIONS
PRIORITY (Y/N TO SELECT) ............MED
DELAY TIMER (0-255 SEC) .............0
MIN GREEN BEFORE PRE (0= DEFAULT)....1
PED CLEAR BEFORE PRE (0= DEFAULT)....0
YELLOW CLEAR BEFORE PRE (0= DEFAULT).0.0
RED CLEAR BEFORE PRE (0= DEFAULT)....0.0
DWELL MIN TIMER (0-255 SEC) .........12
DWELL MAX TIMER (0=OFF,1-255MIN) ....0
DWELL HOLD-OVER TIMER (0-255) .......0
LATCH CALL? .........................N
LINK TO NEXT PREEMPT? ...............N
ENABLE BACKUP PROTECTION? ...........N
HOLD CLEAR 1 PHASES DURING DELAY? ...N
FAST GREEN FLASH DWELL PHASES? ......N
PED CLEARANCE THROUGH YELLOW? .......N
INHIBIT OVERLAP GREEN EXTENSION? ....N
SERVICE DURING SOFTWARE FLASH? ......N
REST IN RED DURING DWELL INTERVAL? ..N
FLASH DWELL INTERVAL? ...............N
ALLOW PEDS IN DWELL INTERVAL? .......N
RE-TIME DWELL INTERVAL? .............N
OVERLAPS:                  | ABCDEFGHIJKLMNOP
DWELL INT FLASH YELLOW     |
OMIT OVERLAPS:             |
```

PROGRAMING COMPLETE

Program extend time an optical detector unit for 5.0 seconds.

INPUT FILE POSITION LAYOUT

(front view)

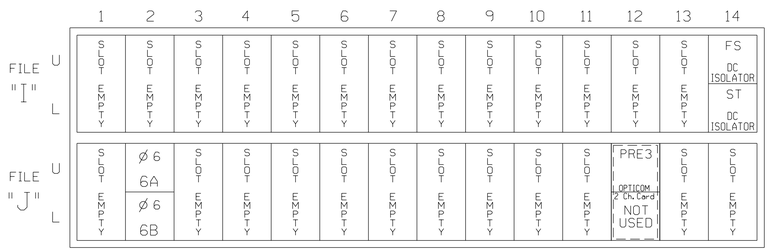

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME
PRE = PREEMPT

INPUT FILE POSITION LEGEND: J2L

FILE J
SLOT 2
LOWER

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
6A	TB3-5,6	J2U	40	2	6	6	Y	Y			
6B	TB3-7,8	J2L	44	6	16	6	Y	Y			

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

TYPICAL OPTICOM FIELD WIRE DETAIL

(input file, rear view)

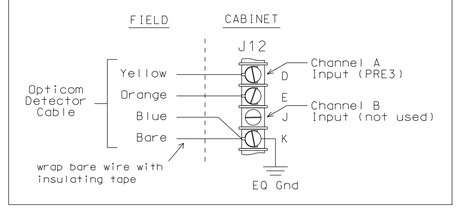

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 04-1409T1
DESIGNED: November 2016
SEALED: 1/30/2017
REVISED:

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL DETAIL - Temporary Design - (Area 1 TMP Phase II & III)

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared for the Offices of:

Mobility and Safety Division, Transportation, Signal Management Section, NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

750 N.Greenfield Pkwy.,Garner,NC 27529

US 301 Byp (S. Wesleyan Blvd) at US 64 Bus (Sunset Ave) EB Ramp

Division 04 | Nash County | Rocky Mount

PLAN DATE: November 2016 | REVIEWED BY: MB Toth

PREPARED BY: AM Encarnacion | REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 025892 ENGINEER
MELISSA B. TOTH

Designed by: Melissa B. Toth
SIGNATURE
1/30/2017
DATE

SIG. INVENTORY NO. 04-1409T1

ATKINS
1616 EAST MILLBROOK ROAD, SUITE 160
RALEIGH, NORTH CAROLINA 27609
(919) 876-6888 NCBEES #F-0326

30-JAN-2017 17:03
D:\Transportation\Traffic\Curr\100052135 U-3330 Signals\02_Signals\Design\01 Wiring\04-1409ET1.dgn
ENCA5386 AT LUS29021