8/17/99

DETOUR

PROJECT REFERENCE NO.	SHEET NO.
B-4447	EC-6/CONST.2B-3
R/W SHEET NO.	2B-3
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 2B-3

MATCHLINE -DETEB- STATION 25+00 SEE SHEET 2B-2

MATCHLINE -DETEB- STA. 38+50 INSET B

PT Sta. 12+76.26

PT Sta. 14+64.68

PC Sta. 16+22.08

PI Sta. 16+9.23

PC Sta. 17+12.88

PT Sta. 17+68.04

PC Sta. 18+21.27

PT Sta. 18+81.33

POT Sta. 21+51.39

PC Sta. 27+87.12

PC Sta. 29+66.47

BEGIN MEDIAN PAVING
-DETWB- 30+07.34

PRC Sta. 35+85.15

PRC Sta. 32+62.96

END PAVING -DETEB-
37+25.54

-DETWB-
S 69° 38' 35.3" E

-DETEB-
S 69° 38' 35.3" E

S 10° 18' 15" W
260.00'

S 15° 43' 55" E
260.00'

S 30° 31' 08.4" E
260.00'

N 61° 05' 53" E
136.30'

N 08° 35' 30" E
247.91'

N 62° 29' 20" E
247.91'

S 89° 00' 55" E
260.00'

N 28° 08' 20" E
260.00'

N 13° 11' 46" E
446.00'

S 13° 11' 46" E
446.00'

REMOVE EXIST. GUARDRAIL ANCHOR UNIT

TEMPORARY GUARDRAIL

TIE TO EXISTING GUARDRAIL

TEMPORARY GRAU 350 TL-3

REMOVE EXISTING GUARDRAIL

REMOVE AND RESET GUARDRAIL PRIOR TO TRAFFIC SHIFT

TEMPORARY TYPE-III

TEMPORARY TYPE B-77

TEMPORARY MEDIAN BARRIER

TEMPORARY GUARDRAIL

REVISE ALIGNMENT TO PROVIDE MINIMUM 6' SHOULDER FOR DETOUR

ADJUST TOP AS NECESSARY TO DRAIN LINE AHEAD DITCH

USE SLOTTED BARRIER RAIL

GRADE TO DRAIN SEE DETAIL T-1

USE MATTING FOR DITCH LINER

4' PS

CAT-1

RAISE GRADE TO AVOID UNDERCUTTING EXISTING ROAD

COIR FIBER MATTING
+/-160sy

COVER WITH STEEL PLATE

END PROP. TEMP. RETAINING WALL #2
-L- STA. 25+90.00
124.50' RIGHT

BM #2
-BY- STA. 11+33.88
16.31' RT
ELEV = 1191.28'

PROPOSED DITCH LIMIT

Special Lateral Ditch
See Detail D
-DETEB- STA. 32+33
TO STA. 33+36
SEE X-SEC FILE
SLOPE<2.85%

INGLE, LESTER J. & LINDA
DB 647 PG 640

GRIGG, SANDRA SMITH
DB 803 PG 2045

BRITTEN, REBA K.
DB 1636 PG 282

BRITTEN, ROY E. & MARGARET E.
DB 735 PG 548

BRITTEN, ROY E. & MARGARET E.
DB 686 PG 679

NAD 83

DETAIL D
SPECIAL LATERAL 'V' DITCH
w/Coir Fiber Matting
(Not to Scale)



Min. D= 2 Ft.
Matting D= 2 FT.

FROM -DETEB- STA. 32+33 TO STA. 33+36 RT.

INSET B

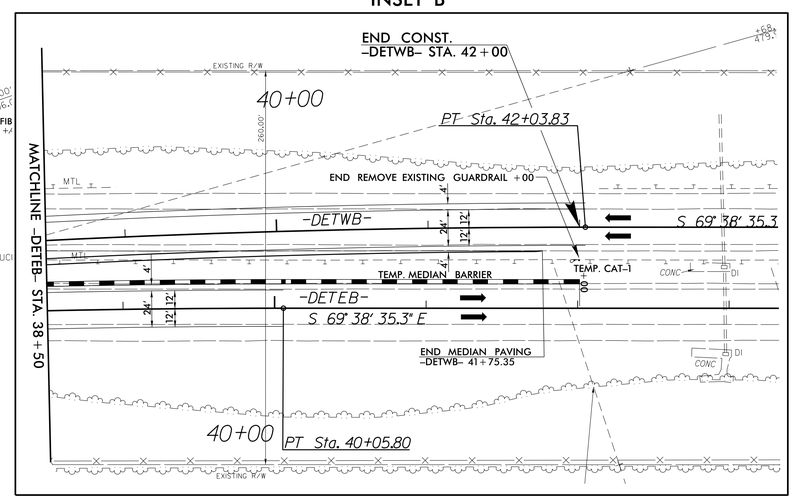

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE – B AND TEMPORARY ROCK SILT CHECKS TYPE – A AT DRAINAGE OUTLETS.

14-FEB-2017 09:49
K:\Projects\Design\B4447_EC_det_2B-3.dgn
$(USERNAME)
$(REF)