


NOTE

* CONCRETE DECK REPAIR FOR DECK CRACK SEALING IS NOT ANTICIPATED. TOKEN PAY ITEM IS INDICATED FOR PRICING PURPOSE IN CASE UNANTICIPATED REPAIR AREAS ARE ENCOUNTERED.

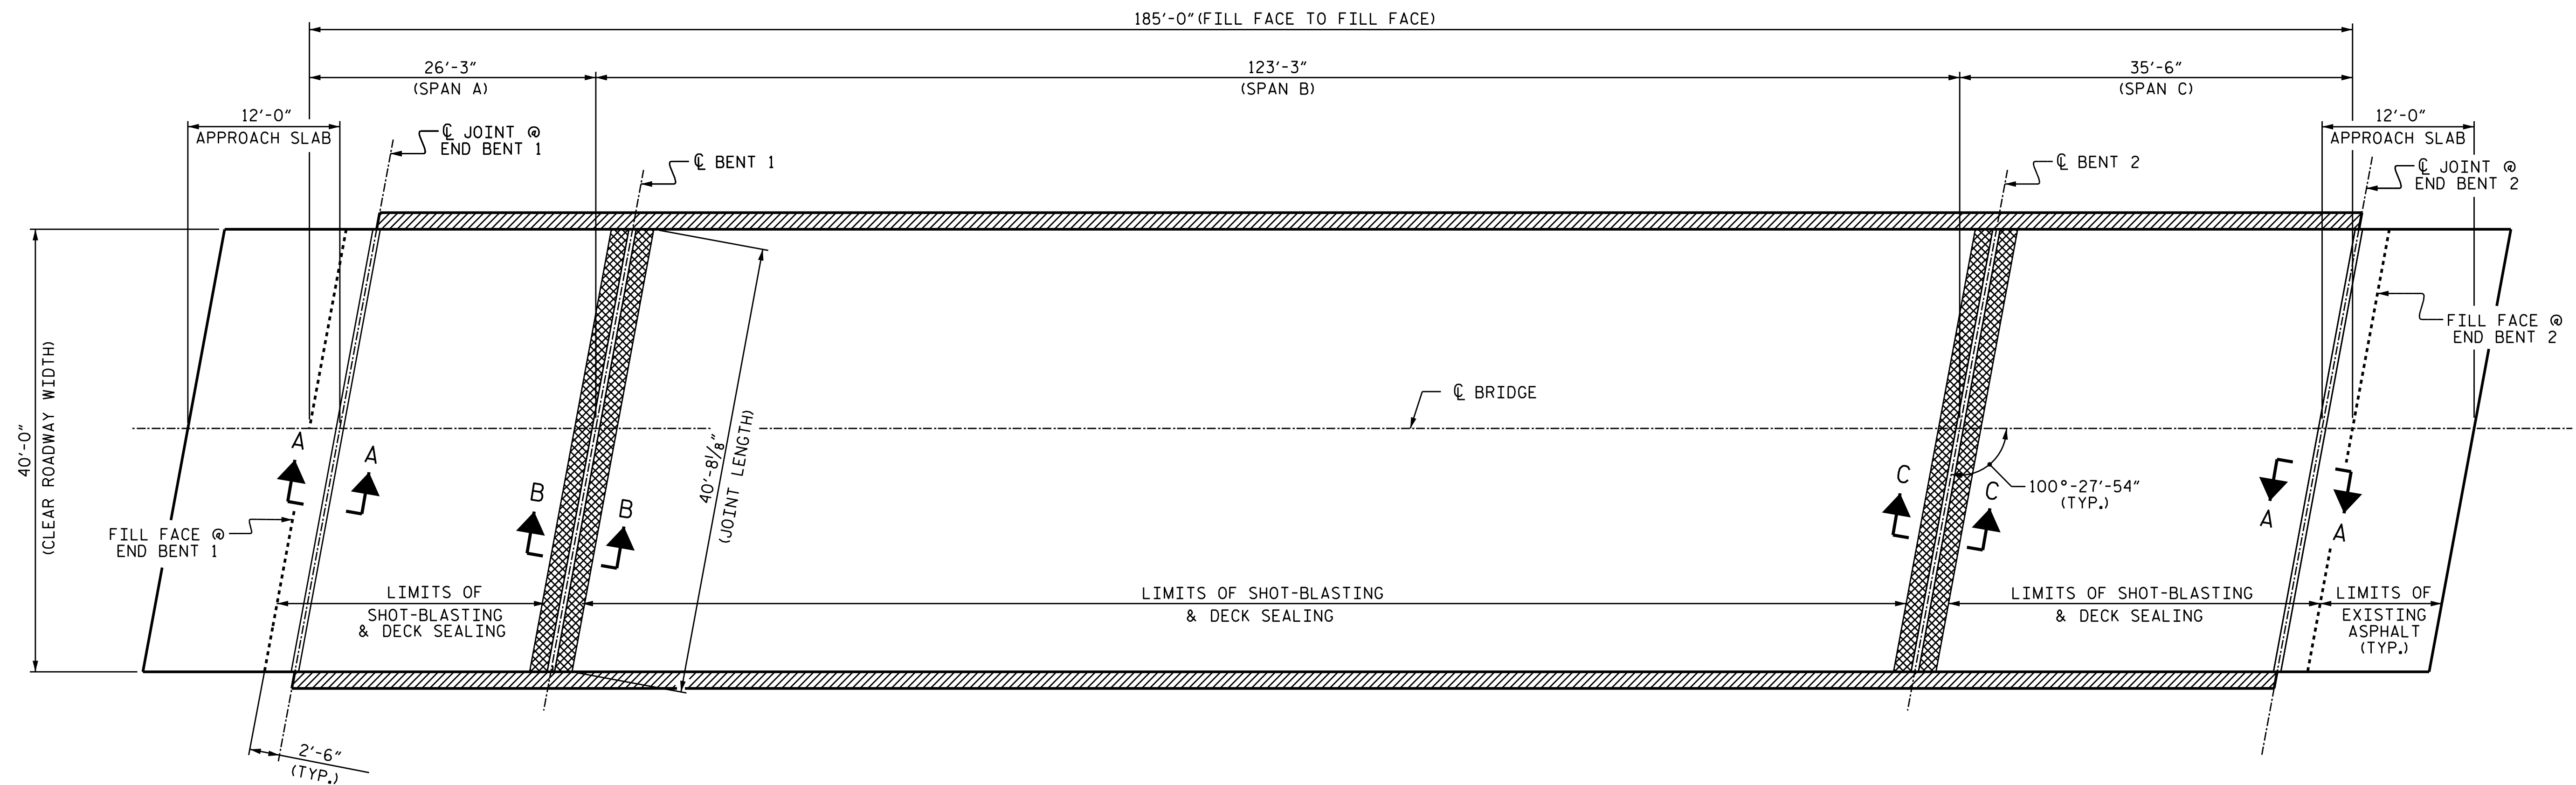


SUMMARY OF QUANTITIES

	ESTIMATE	ACTUAL
CONCRETE DECK REPAIR FOR CRACK SEALING	* 10 SQ.FT.	
SHOTBLASTING BRIDGE DECK	813.2 SQ.YD.	
CONCRETE BRIDGE DECK CRACK SEALING	813.2 SQ.YD.	
BRIDGE JOINT DEMOLITION	81.5 SQ.FT.	
SURFACE PREPARATION FOR CONCRETE BARRIER	987 SQ.FT.	
SILANE BARRIER RAIL TREATMENT	987 SQ.FT.	



PLAN OF SPANS A, B AND C

(FOR SECTIONS A-A, B-B & C-C, SEE "JOINT DETAILS" SHEET S-9)

-  CONCRETE DECK CRACK SEALING
-  BRIDGE JOINT DEMOLITION
-  SILANE BARRIER RAIL TREATMENT

PROJECT NO. I-5839
HALIFAX COUNTY
 BRIDGE No.: 124



STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
**SUPERSTRUCTURE
 DECK CRACK SEALING &
 SILANE BARRIER RAIL
 TREATMENT
 (NBL)**

DRAWN BY : M. K. BEARD / S. T. SANDOR DATE : 2/28/17
 CHECKED BY : W. C. SMITH DATE : 04/2017

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			S-5
2			4			42