


SUMMARY OF QUANTITIES

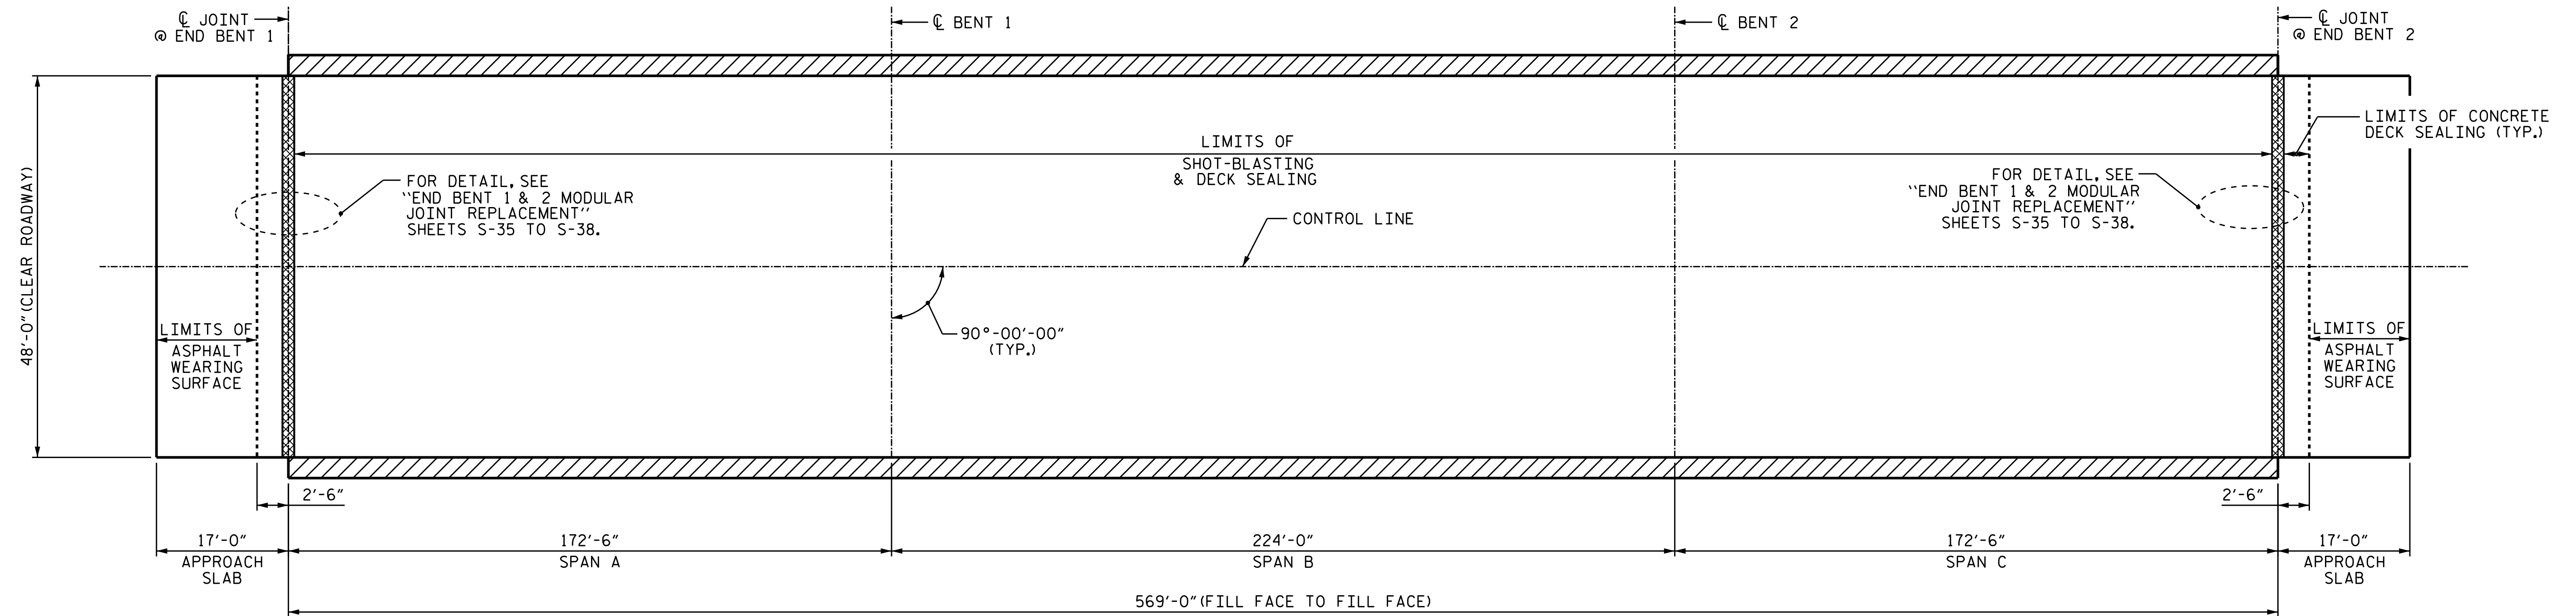


| | ESTIMATE | ACTUAL |
|--|--------------|--------|
| CONCRETE DECK REPAIR FOR CRACK SEALING | * 10 SQ.FT. | |
| SHOTBLASTING BRIDGE DECK | 3,053 SQ.YD. | |
| CONCRETE BRIDGE DECK CRACK SEALING | 3,053 SQ.YD. | |
| BRIDGE JOINT DEMOLITION | 96 SQ.FT. | |
| SURFACE PREPARATION FOR CONCRETE BARRIER | 2,084 SQ.FT. | |
| SILANE BARRIER RAIL TREATMENT | 2,084 SQ.FT. | |

NOTES


* CONCRETE DECK REPAIR FOR CRACK SEALING IS NOT ANTICIPATED. TOKEN PAY ITEMS ARE INDICATED FOR PRICING PURPOSE IN CASE UNANTICIPATED REPAIR AREAS ARE ENCOUNTERED.



PLAN OF SPANS - DECK REPAIR

-  CONCRETE DECK CRACK SEALING
-  BRIDGE JOINT DEMOLITION
-  SILANE BARRIER RAIL TREATMENT

PROJECT NO. I-5839
HALIFAX COUNTY
 BRIDGE No.: 141

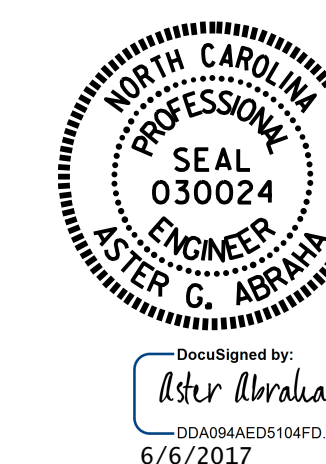

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
SUPERSTRUCTURE
 DECK CRACK SEALING &
 SILANE BARRIER RAIL
 TREATMENT

DRAWN BY : M. K. BEARD / S. T. SANDOR DATE : 03/2017
 CHECKED BY : W. C. SMITH DATE : 03/2017

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

| REVISIONS | | | | | | SHEET NO. |
|-----------|-----|-------|-----|-----|-------|--------------|
| NO. | BY: | DATE: | NO. | BY: | DATE: | TOTAL SHEETS |
| 1 | | | 3 | | | S-29 |
| 2 | | | 4 | | | 42 |