2

203

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

SIGNING PLAN

JOHNSTON COUNTY
LOCATION: BRIDGE NO. 32 OVER HANNAH CREEK ON SR 1185 (JOYNER BRIDGE RD.)

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.	TIEW DESCRIPTION	QUANTITY	ONTI
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	14	LF.
4102000000	904	SIGN ERECTION, TYPE E	1	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	3	EA.
4158000000	907	DISPOSAL OF SIGN SYSTEM, WOOD	4	EA.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

<u> </u>	<u> </u>
904.	10

ORIENTATION OF GROUND MOUNTED SIGNS

MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS 904.50

TITLE

PROJECT NOTES


DISPOSAL OF SIGN SYSTEM, WOOD

DISPOSAL OF SIGN SYSTEM, U-CHANNEL

GENERAL NOTES


- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL/WOOD POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

TYPE "E" SIGNS (401) QUANTITY REQ'D 1 30 X 30 W3 - 1 ONE "U" POST PER SIGN

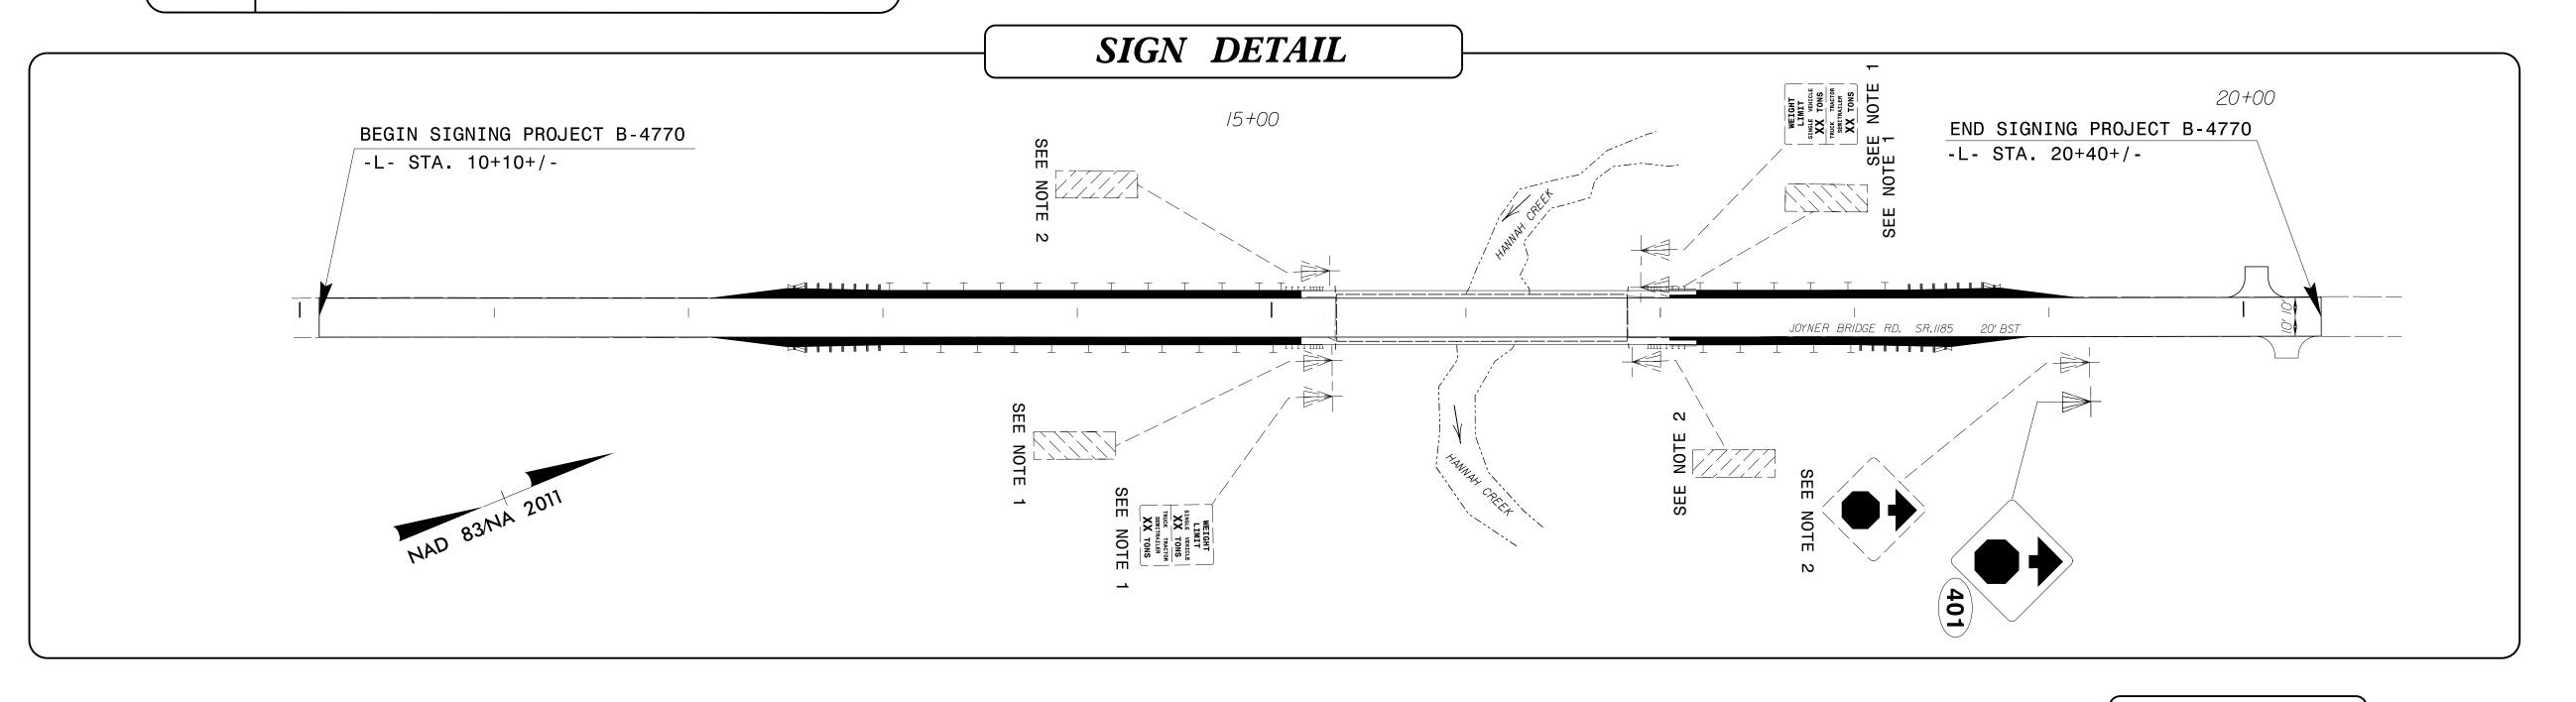

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

AYMAN ALQUDWAH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER ERIC E WARD SIGNING & DELINEATION PROJECT DESIGN ENGINEER



INDEX

SHEET NO.

DESCRIPTION

SIGN-1

TITLE SHEET, SIGN DETAIL, NOTES

SIGN-1

B-4770

DATE: ______

Ayman Alqudwah

DOCUMENT NOT CONSIDERED FINAL

UNLESS ALL SIGNATURES COMPLETED