

DocuSign Envelope ID: 04B7F20E-DC90-4DEA-AE3C-9D7557A8B1C6



NOTES:

- . IF THE CONTRACTOR BIDS ALUMINUM SIGN STRUCTURE, EACH SHALL BE PROVIDED WITH AN APPROVED HIGHWAY TRUSS DAMPER DEVICE IN ACCORDANCE WITH AASHTO SPECIFICATIONS.
- 2. MOUNT SIGNS VERTICALLY CENTERED ON HORIZONTAL MEMBER OF STRUCTURE.
- 3. FIELD VERIFICATION SHALL BE REQUIRED FOR ALL FOOTING ELEVATIONS, PER THE LATEST NCDOT STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES. PROVIDE FIELD VERIFICATION TO THE SIGNING SECTION.
- 4. THE TOP OF THE FOOTING SHALL EXTEND AT LEAST 4 INCHES AND NOT MORE THAN 24 INCHES ABOVE THE HIGHEST POINT OF THE GROUND SURFACE AT THE FOOTING.
- 5. SIGN HANGERS AND ATTACHMENT HARDWARE SHALL BE PROVIDED AND INSTALLED ON THE ASSEMBLY TO ACCOMMODATE ALL SIGNS SHOWN IN THIS PLAN SHEET.
- 6. DESIGN AND CONSTRUCTION REQUIREMENTS FOR SIGN STRUCTURES SHALL ACCOMMODATE WIND VELOCITY OF 90 M.P.H.

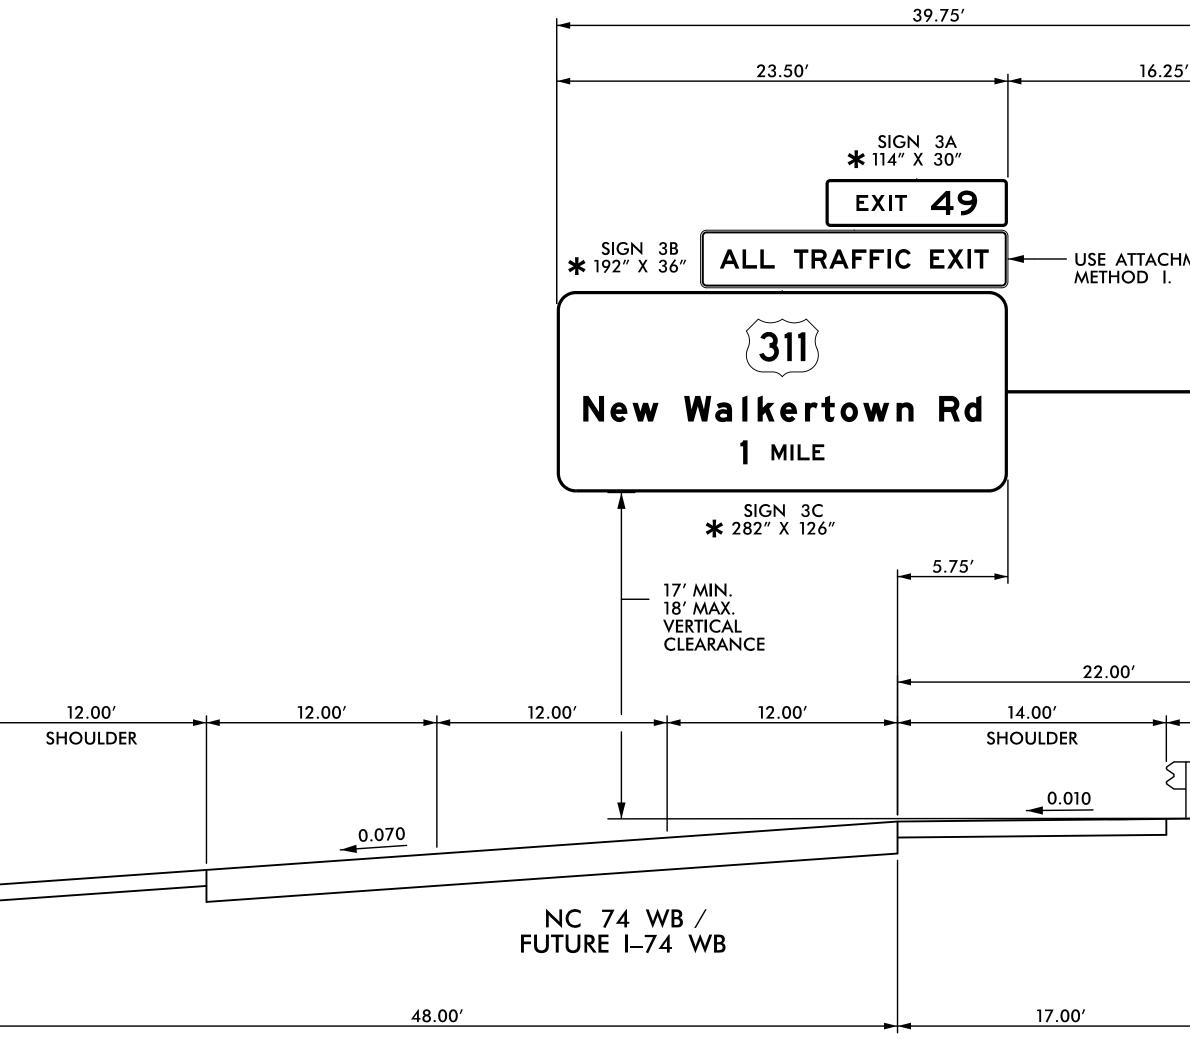

* THESE DIMENSIONS SHALL BE USED FO WIND LOAD AND DEAD LOAD COMPU IN DESIGN OF STRUCTURE AND FOOTIN DESIGN AND CONSTRUCTION REQUIREM FOR SIGN STRUCTURES SHALL ACCOMODE WIND VELOCITY OF 90 M.P.H.



		TIP NO.	SHEET NO. SIGN-3E
		U-2579C	JIGIN-JE
		APPROVED: <u>Charles A. Johnson, I</u> 7/5/2017	
		DATE:	
		SEAL	
		OR TH CAROL	
		A. JOHN	
		A JOHN	Ĵ,
		DOCUMENT NOT CONSID	
;′ ►			
MENT			
8.00′	PROPOSED/EXTEND		
0.00	GUARDRAIL SEE RDWY PLANS		
	<u>0.167</u>		
	0.58		
5.00'			
'			
)R			
DR ITATIONS NGS.			
NGS. MENTS			
DATE			
1			
. <u>c</u> .	OVERHEAD SI	GN STRUCTUR	RE 'C'
.C. Suite 200 a 27609		. 459+00 LT	