DocuSign Envelope ID: 452ADE55-181A-4956-90FC-4696F522C663

PROJECT REFERENCE NO.	SHEET NO.
B-5236	2C-12

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
STRUCTURE ANCHOR UNITS
GUARDRAIL ANCHOR UNIT, TYPE III

SHEET 3 OF 7
862D03



THRIE BEAM OFFSET BLOCK

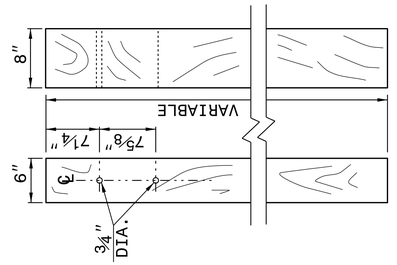

THRIE BEAM LINE POST



SECTION OF 'W' BEAM POST 9



SECTION OF WTR BEAM POST 8



SECTION OF THRIE BEAM POST 7



SECTION OF THRIE BEAM POSTS 1 THRU 6

NOTE: THE MID POST AND OFFSET BLOCK OF THE WTR SECTION WILL REQUIRE SPECIAL BOLT HOLE DRILLING IN THE THRIE BEAM OFFSET BLOCK AND LINE POST.

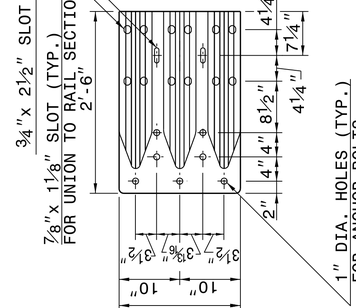

END SHOE



THRIE-BEAM SECTION



WTR SECTION
ELEVATION VIEW

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
STRUCTURE ANCHOR UNIT
GUARDRAIL ANCHOR UNIT TYPE B-77
FOR F-SHAPE BARRIER

SHEET 4 OF 7
862D03

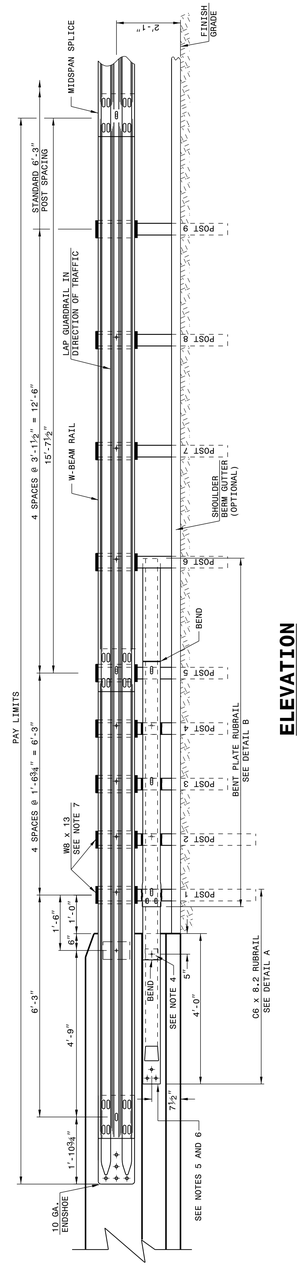

ELEVATION

GENERAL NOTES:
1) POSTS 1 THROUGH 5 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKOUTS AND/OR RUBRAIL; SEE DETAIL C AND NOTE 2. RUBRAIL IS SECURED TO POST 6 WITH A 5/8" x 4½" BUTTONHEAD BOLT. SEE NOTES 2 AND 3. RUBRAIL IS SECURED TO POST 5 WITH A 5/8" x 4½" BUTTONHEAD BOLT AND RECTANGULAR PLATE WASHER.
2) RUBRAIL BLOCKOUTS CONSIST OF TWO 4" x 8" x 14" (NOMINAL LENGTHS) SECURED WITH 5/8" x 10" GALVANIZED BOLTS AND BLOCKOUTS TO POSTS 1 AND 3. RUBRAIL IS SECURED TO POST 2 WITH A 5/8" x 4½" BUTTONHEAD BOLT. RUBRAIL IS FLARED TO BACK OF POST 6 AND NOT SECURED.
3) STEEL SPACER TUBE IS A SCHEDULE 40 GALVANIZED PIPE 6" INSIDE DIAMETER x 9" LONG. ATTACH TUBE TO RAIL ELEMENT ONLY. USE 3/8" x 3" LAG BOLT WITH FLAT WASHER.
4) SEE DETAIL D FOR SLOTTED RUBRAIL BLOCKOUT DETAILS. ATTACH RUBRAIL TO POST 1 AND ATTACH FLUSH WITH THE SLOPED SHOULDER BERM GUTTER OR APPROACH SLAB.
5) SHOP FABRICATE THE C6 x 8.2 RUBRAIL END TO BE CONSISTENT WITH THE SLOPE OF THE F-SHAPE AND ATTACH TO RAIL ELEMENT WITH A 5/8" x 6" CHEMICALLY ANCHORED THREADED STUD.
6) ANCHORAGE:
   (a) AT EXISTING BRIDGE RAIL AND NEW OR EXISTING BARRIERS, ANCHOR RUBRAIL USING THREE 5/8" x 6" CHEMICALLY ANCHORED BOLTS WITH WASHERS. MAXIMUM PROJECTION FOR BOLTS IS 1½". (SEE STD. DWG. 862.04).
   (b) AT EXISTING BRIDGE RAIL AND NEW OR EXISTING BARRIERS, ANCHOR THE W-BEAM END SHOE USING A 4 BOLT HOLD DOWN PLATE (SEE STD. DWG. 862.04). A 4 BOLT INSERT ASSEMBLY IS ALLOWED ON PRECAST REINFORCED CONCRETE BARRIER (SEE STD. DWG. 857.01). INSTALL THE W-BEAM END SHOE BEHIND THE NESTED W-BEAM ELEMENTS.
   (c) AT NEW BRIDGE RAIL, ANCHORAGE DETAILS ARE DETAILED ON THE STRUCTURE PLANS.
7) POSTS 1 AND 2 ARE W6 x 13, 7'-6" LONG. ALL OTHER POSTS IN THE ANCHOR UNIT ARE W6 x 8.5.

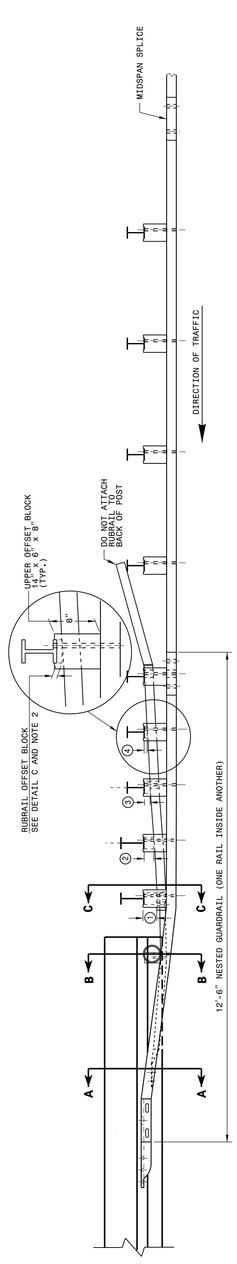

PLAN

GUARDRAIL ANCHOR UNIT TYPE B-77

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ROADWAY DETAIL DRAWING FOR
GUARDRAIL ANCHOR UNIT
GUARDRAIL ANCHOR UNIT TYPE B-77
FOR F-SHAPE BARRIER

SHEET 4 OF 7
862D03

30-MAY-2017 09:22
S:\Contracts\Contracts\Special Details\jhowerton\Standard Drawings\2012 Standard Drawings\Details in Lieu of Standards\Division 8\862d01 862d03 862d03\862d03.dgn
jhowerton AT CSD-292595

NORTH CAROLINA PROFESSIONAL SEAL 022966 ENGINEER Joel S. Howerton
8/18/2017
DocuSigned by:
873F3D17DCDC45F...

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

CONTRACT STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE TITLE BLOCK

ORIGINAL BY: J HOWERTON DATE: 06-22-12
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: _____