DocuSign Envelope ID: B03D2618-F462-4206-8A75-409D28D968FB

LOAD AND RESISTANCE FACTOR RATING (LRFD) SUMMARY FOR PRESTRESSED CONCRETE GIRDERS

LEVEL		VEHICLE	WEIGHT (W) (TONS)	CONTROLLING LOAD RATING	MINIMUM RATING FACTORS (RF)	TONS = W X RF	STRENGTH I LIMIT STATE											SERVICE III LIMIT STATE						COMMENT NUMBER
							LIVELOAD FACTORS	MOMENT					SHEAR					LIVELOAD FACTORS	MOMENT					
								DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)	DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)		DISTRIBUTION FACTORS (DF)	RATING FACTOR	SPAN	GIRDER LOCATION	DISTANCE FROM LEFT END OF SPAN (ft)	
DESIGN LOAD RATING		HL-93(Inv)	N/A	1	1.13	--	1.75	0.9	1.38	A	EL	44.95	1.06	1.21	A	I	63.21	0.80	0.82	**1.13**	A	I	**44.95**	
		HL-93(Opr)	N/A	--	1.61	--	1.35	0.9	1.79	A	EL	44.95	1.06	1.61	A	I	72.34	N/A	--	--	--	--	--	
		HS-20(Inv)	36.000	2	1.55	55.800	1.75	0.9	1.90	A	EL	44.95	1.06	1.61	A	I	72.34	0.80	0.82	**1.55**	A	I	**44.95**	
		HS-20(Opr)	36.000	--	2.13	76.680	1.35	0.9	2.47	A	EL	44.95	1.06	2.13	A	I	72.34	N/A	--	--	--	--	--	
LEGAL LOAD RATING	SV	SNSH	13.500	--	3.66	49.410	1.40	0.9	5.62	A	EL	44.95	1.06	5.29	A	I	72.34	0.80	0.82	3.66	A	I	44.95	
		SNGARBS2	20.000	--	2.66	53.200	1.40	0.9	4.07	A	EL	44.95	1.06	3.70	A	I	72.34	0.80	0.82	2.66	A	I	44.95	
		SNAGRIS2	22.000	--	2.48	54.560	1.40	0.9	3.80	A	EL	44.95	1.06	3.42	A	I	72.34	0.80	0.82	2.48	A	I	44.95	
		SNCOTTS3	27.250	--	1.81	49.323	1.40	0.9	2.78	A	EL	44.95	1.06	2.52	A	I	72.34	0.80	0.82	1.81	A	I	44.95	
		SNAGGRS4	34.925	--	1.49	52.038	1.40	0.9	2.28	A	EL	44.95	1.06	1.98	A	I	72.34	0.80	0.82	1.49	A	I	44.95	
		SNS5A	35.550	--	1.46	51.903	1.40	0.9	2.24	A	EL	44.95	1.06	2.00	A	I	72.34	0.80	0.82	1.46	A	I	44.95	
		SNS6A	39.950	--	1.33	53.134	1.40	0.9	2.04	A	EL	44.95	1.06	1.81	A	I	17.56	0.80	0.82	1.33	A	I	44.95	
		SNS7B	42.000	--	1.26	52.920	1.40	0.9	1.94	A	EL	44.95	1.06	1.76	A	I	17.56	0.80	0.82	1.26	A	I	44.95	
	TTST	TNAGRIT3	33.000	--	1.62	53.460	1.40	0.9	2.48	A	EL	44.95	1.06	2.15	A	I	72.34	0.80	0.82	1.62	A	I	44.95	
		TNT4A	33.075	--	1.62	53.582	1.40	0.9	2.49	A	EL	44.95	1.06	2.28	A	I	72.34	0.80	0.82	1.62	A	I	44.95	
		TNT6A	41.600	--	1.31	54.496	1.40	0.9	2.02	A	EL	44.95	1.06	1.87	A	I	72.34	0.80	0.82	1.31	A	I	44.95	
		TNT7A	42.000	--	1.32	55.440	1.40	0.9	2.02	A	EL	44.95	1.06	1.84	A	I	17.56	0.80	0.82	1.32	A	I	44.95	
		TNT7B	42.000	--	1.35	56.700	1.40	0.9	2.07	A	EL	44.95	1.06	1.72	A	I	17.56	0.80	0.82	1.35	A	I	44.95	
		TNAGRIT4	43.000	--	1.29	55.470	1.40	0.9	1.98	A	EL	44.95	1.06	1.70	A	I	72.34	0.80	0.82	1.29	A	I	44.95	
		TNAGT5A	45.000	--	1.22	54.900	1.40	0.9	1.88	A	EL	44.95	1.06	1.62	A	I	72.34	0.80	0.82	1.22	A	I	44.95	
		TNAGT5B	45.000	3	1.21	54.450	1.40	0.9	1.86	A	EL	44.95	1.06	1.59	A	I	17.56	0.80	0.82	**1.21**	A	I	**44.95**	

LOAD FACTORS:

DESIGN LOAD RATING FACTORS	LIMIT STATE	γ_{DC}	γ_{DW}
	STRENGTH I	1.25	1.50
	SERVICE III	1.00	1.00

NOTES:

MINIMUM RATING FACTORS ARE BASED ON THE STRENGTH I AND SERVICE III LIMIT STATES.

ALLOWABLE STRESSES FOR SERVICE III LIMIT STATE ARE AS REQUIRED FOR DESIGN.

COMMENTS:

1.
2.
3.
4.

(#) CONTROLLING LOAD RATING

(1) DESIGN LOAD RATING (HL-93)

(2) DESIGN LOAD RATING (HS-20)

(3) LEGAL LOAD RATING **

** SEE CHART FOR VEHICLE TYPE

GIRDER LOCATION

I - INTERIOR GIRDER
EL - EXTERIOR LEFT GIRDER
ER - EXTERIOR RIGHT GIRDER

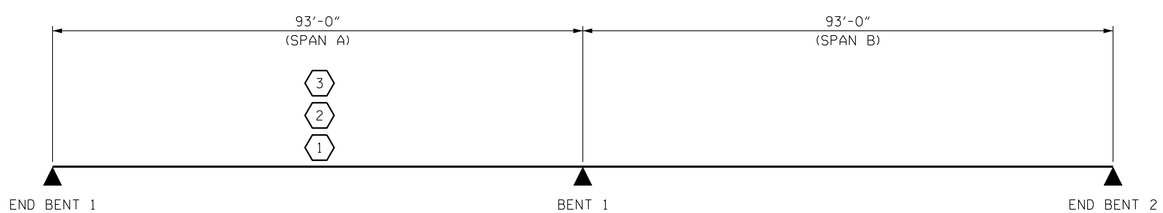

LRFR SUMMARY

PROJECT NO. R-5752
ROBESON COUNTY
STATION: 30+39.23 -Y-

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

NORTH CAROLINA PROFESSIONAL SEAL 33698 ENGINEER JOSHUA B. TAYLOR
7/10/2017
DocuSigned by: Joshua B. Taylor

CDM Smith
CDM SMITH
5400 Glenwood Avenue, Suite 400
Raleigh, NC 27612-3228
NC COA No. F-1255

DRAWN BY : A.L. STROUD DATE : 03/17
CHECKED BY : J.B. TAYLOR DATE : 03/17
DESIGN ENGINEER : J.B. TAYLOR DATE : 03/17

DWG. No.

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
STANDARD

LRFR SUMMARY FOR PRESTRESSED CONCRETE GIRDERS

(NON-INTERSTATE TRAFFIC)

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-04
1			3			TOTAL SHEETS
2			4			24

STD. NO. LRFR1

FILE: c:\cdmsmi\taylorjb\d2313787\401_007_R5752_SMU_LRFR_004_170312.dgn
DATE: 7/10/2017 2:08:55 PM