

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**

**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**


I:\2\2017\vhb\proj\raleigh\38564.08 NCDOT 41665.7A\Cumberland\NCDOT\129 and 130\Traffic\Signing\CADD\Signing Layout\Plans\PEF Engseed.11-21-21-16.dgn  
User: mthigpen

# CONTRACT: 41665.7A BRIDGE 008, 129, 130

## STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

# SIGNING PLAN CUMBERLAND COUNTY

**LOCATION: BRIDGE NOS. 129 & 130 ON I-95 BUSINESS LOOP OVER US 301  
AND BRIDGE NO. 008 ON US 301 OVER I-95 BUSINESS LOOP SBL**

|   |                     |
|---|---------------------|
| TIP NO.<br>41665.7A   | SHEET NO.<br>SIGN-1 |
| APPROVED: _____   |                     |
| DATE: _____   |                     |
| SEAL  |                     |
|  |                     |
| DOCUMENT NOT CONSIDERED FINAL<br>UNLESS ALL SIGNATURES COMPLETED                    |                     |

### ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

| STD. NO. | TITLE  |
|----------|--|
| 904.10   | ORIENTATION OF GROUND MOUNTED SIGNS                          |
| 904.50   | MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS |

### PROJECT NOTES

- DISPOSAL OF SIGN SYSTEM, U CHANNEL




### GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

### SUMMARY OF QUANTITIES

| ITEM NO.   |           | ITEM DESCRIPTION                   | QUANTITY | UNIT |
|------------|-----------|------------------------------------|----------|------|
| DESC. NO.  | SECT. NO. |                                    |          |      |
| 4072000000 | 903       | SUPPORTS, 3 LB STEEL U-CHANNEL     | 15       | L.F. |
| 4108000000 | 904       | SIGN ERECTION, TYPE F              | 3        | EA.  |
| 4155000000 | 907       | DISPOSAL OF SIGN SYSTEM, U-CHANNEL | 3        | EA.  |

501 QUANTITY REQ'D 1

|   |               |
|---|---------------|
|  | 1 - 24" X 12" |
|  | 1 - 24" X 24" |
|  | 1 - 24" X 24" |


ONE "U" POST PER SIGN

### INDEX

| SHEET NO. | DESCRIPTION           |
|-----------|-----------------------|
| SIGN-1    | TITLE SHEET, F DESIGN |
| SIGN-2-3  | SIGN DETAIL SHEETS    |

**PLAN REVIEWED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT**

Ayman Alqudwah, PE SIGNING & DELINEATION REGIONAL ENGINEER  
Walter Johnson SIGNING & DELINEATION PROJECT DESIGN ENGINEER

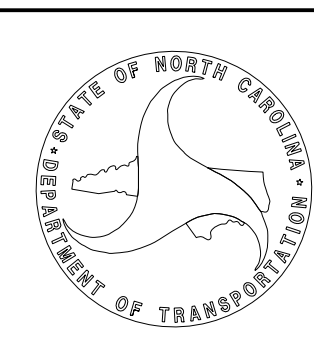

**PLAN PREPARED BY: firms name here**


Joseph Lewis, PE PROJECT ENGINEER  
A. Matthew Thigpen, PE PROJECT DESIGN ENGINEER




APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_

SEAL

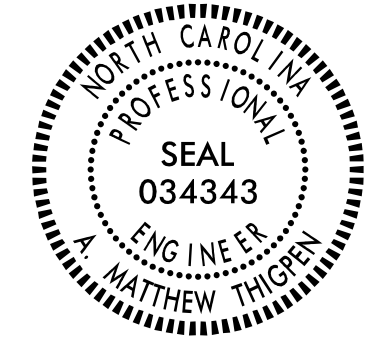

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

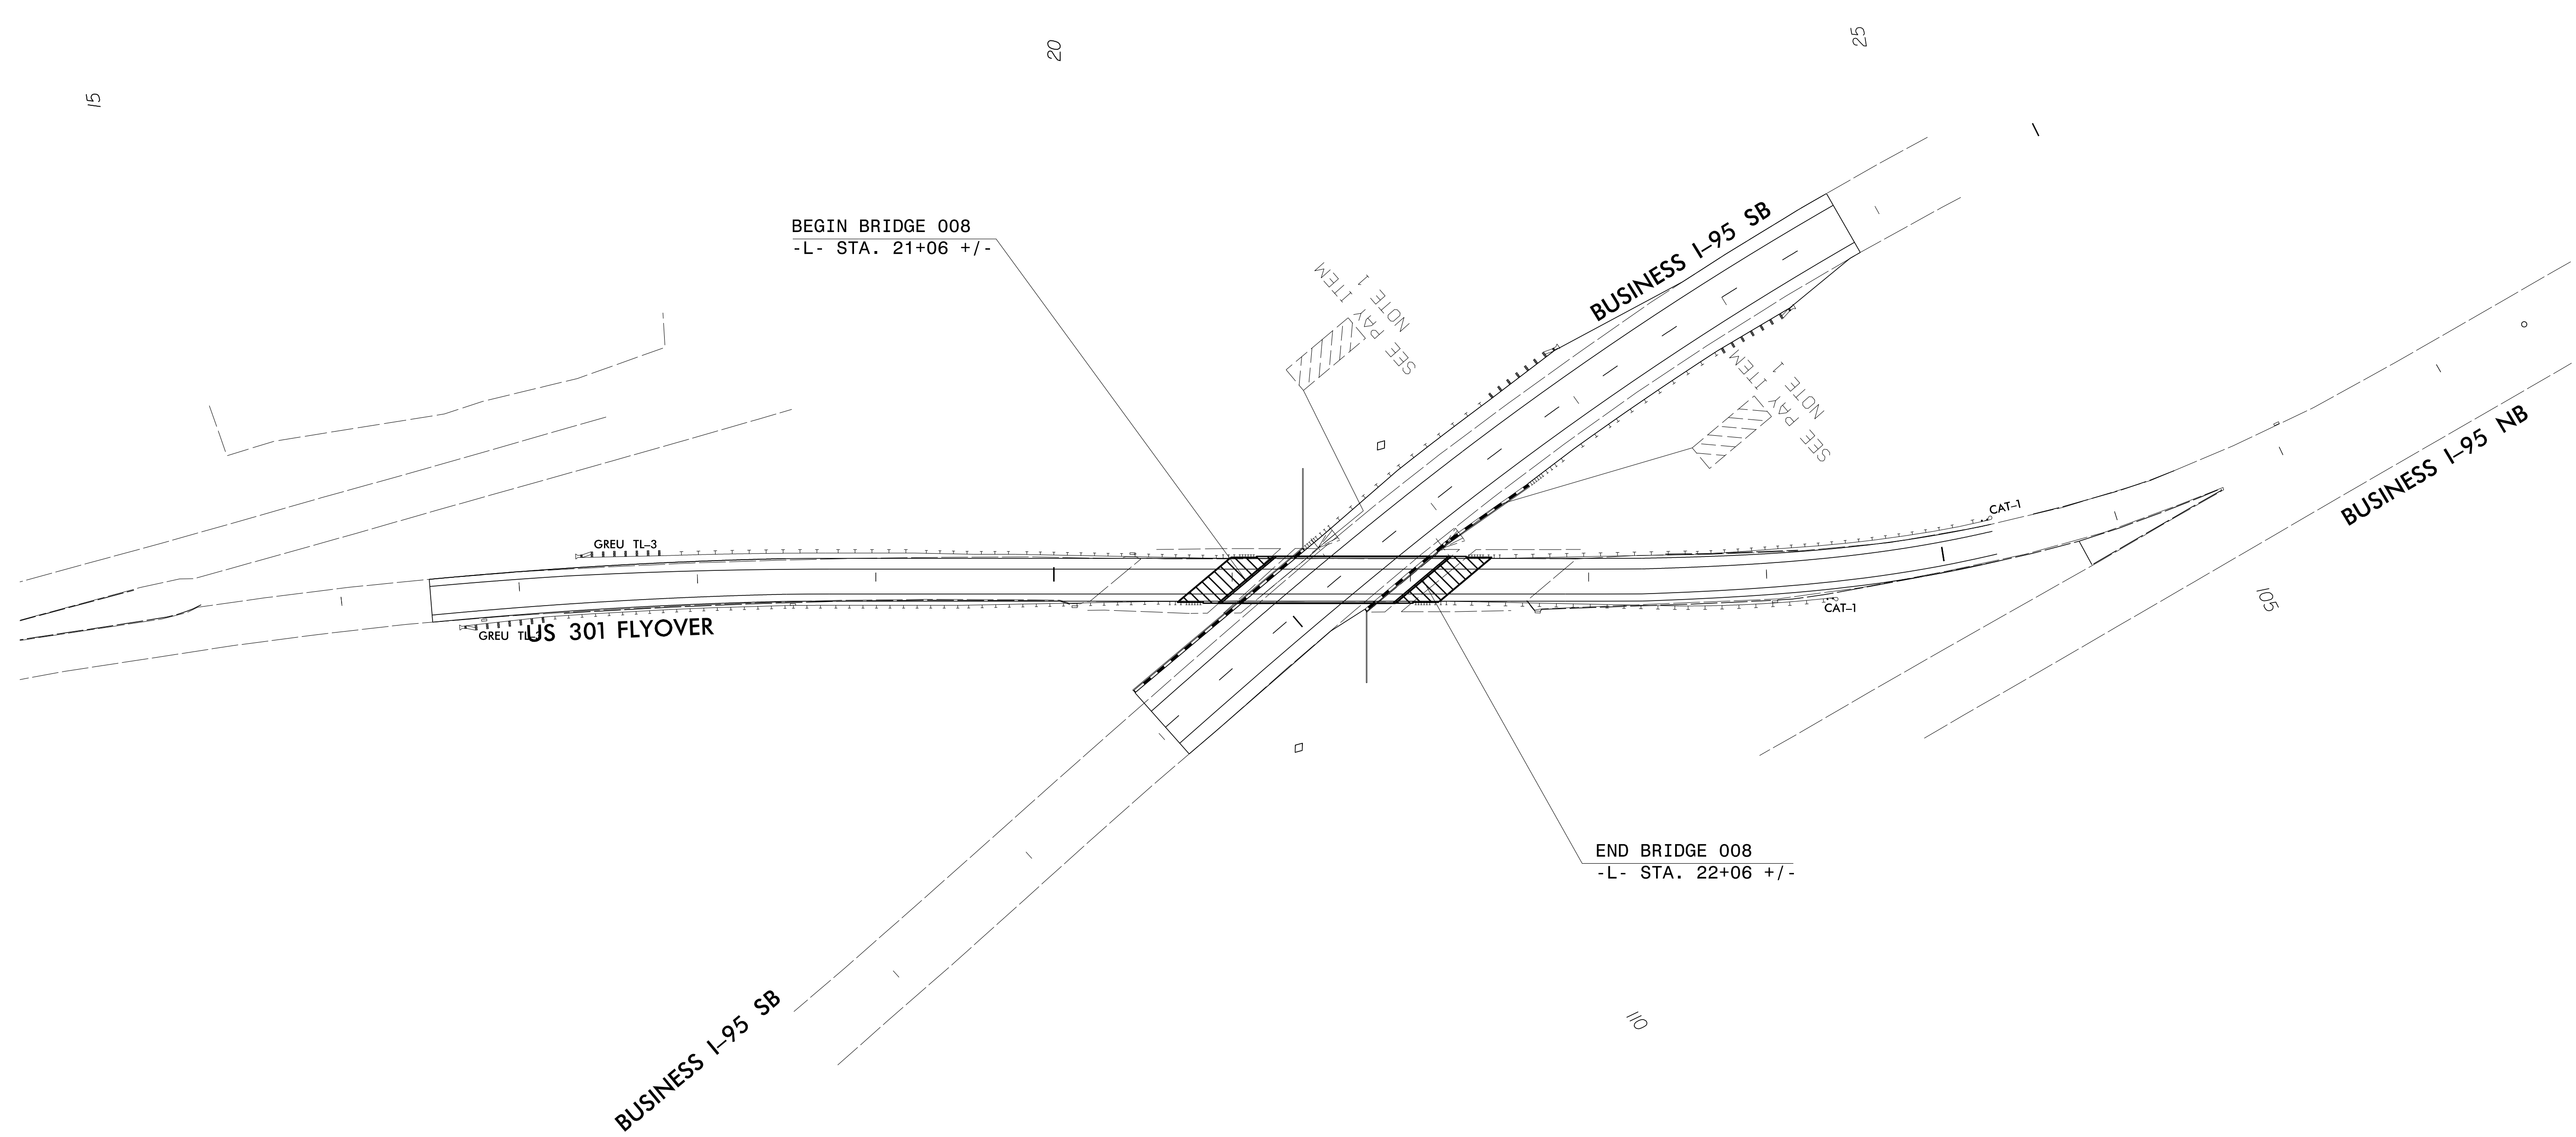


I:\2\2017\11\16\proj\N\raleigh\38564.08 NCDOT 41665.7A\Cumberland\NCDOT\008\Traffic\Signing\CADD\Signing Layout Plans\Div6\_bridges\_SGN\_psh.dgn  
 User:mtthigpen

**EXISTING & PROPOSED SIGNS**


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_

SEAL

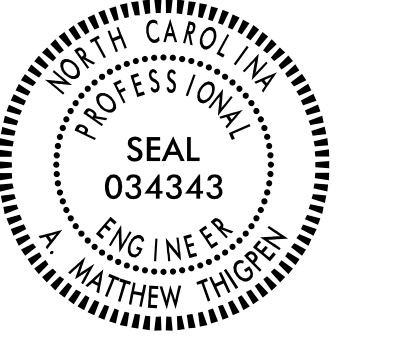

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

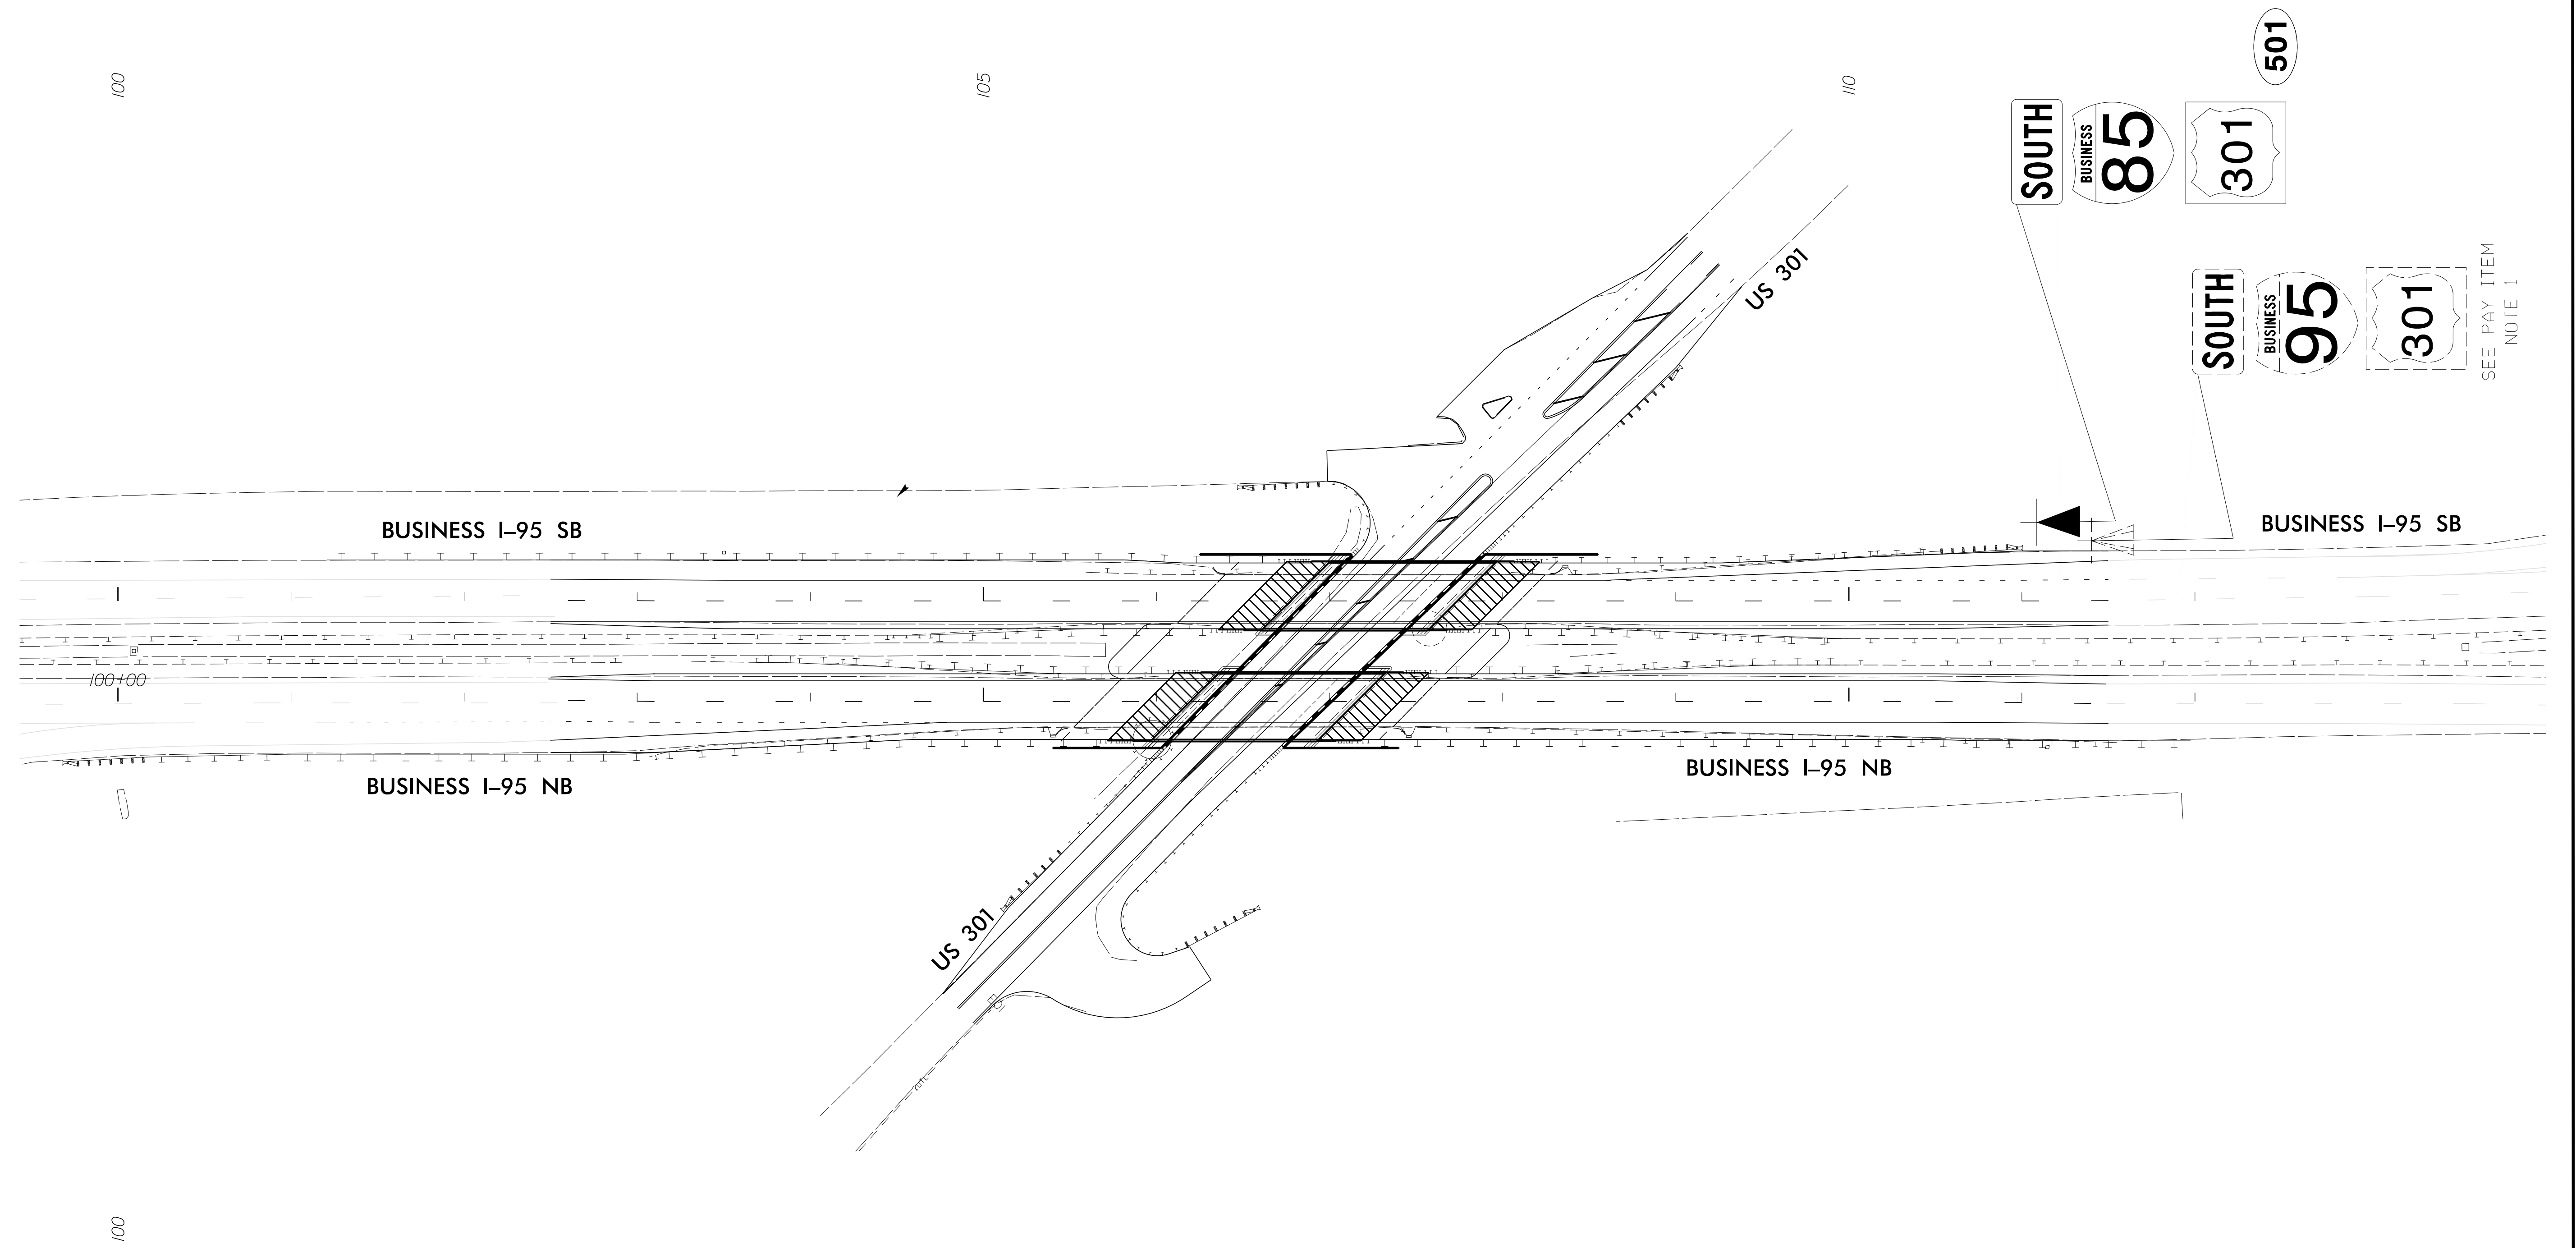

SEE PAY ITEM  
NOTE 1

**EXISTING & PROPOSED SIGNS**

I:\2\2017\Projects\Projects\41665.7A\Cumulative\NCDOT\129 and 130 Traffic Signing\CADD\Signing Layout Plans\Bridge 129\_130\_sgn\_psh.dgn  
 User: mthigpen