

- NOTES:**
1. FURNISH AND INSTALL POLE-MOUNTED TYPE 5052-H32 ALUMINUM NEMA 3S CABINET.
 2. ABANDON EXISTING CONDUIT IN PLACE.
 3. RELOCATE AND RE-USE CCTV-8 METAL POLE, COMMUNICATIONS EQUIPMENT, AND CAMERA ASSEMBLY. SEE SHEET ITS-4 FOR NEW LOCATION. RELOCATE EXISTING ELECTRICAL SERVICE FOR NEW CCTV-8 LOCATION. REMOVE EXISTING JUNCTION BOXES AND DROP CABLE. ABANDON CONDUIT USED FOR DROP CABLE IN PLACE.
 4. ONE BLUE CONDUIT AND ONE WHITE CONDUIT SHALL BE USED FOR ALL TOLL DEVICES.
 5. ONE BLACK CONDUIT AND ONE ORANGE CONDUIT SHALL BE USED FOR ALL ITS TECHNOLOGY DEVICES.
 6. CONTRACTOR TO REFERENCE SIGNING AND LIGHTING PLANS FOR PROPOSED SIGN AND LIGHT LOCATIONS PRIOR TO CONDUIT INSTALLATION.

MATCHLINE -RPD- STA. 15+77 SEE SHEET ITS-4

MATCHLINE -NC540- STA. 558+00 SEE SHEET ITS-4

MATCHLINE -RPD- STA. 23+00 SEE SHEET ITS-8


MATCHLINE -LPD- STA. 16+00 SEE SHEET ITS-8

MATCHLINE -NC540- STA. 571+00 SEE SHEET ITS-6

PLANS PREPARED BY:

RK&K

RUMMEL, KLEPPER & KAHL, LLP
 900 RIDGEFIELD DRIVE SUITE 350
 RALEIGH, NORTH CAROLINA 27609-3960
 NC LICENSE NO. F-0112 • (919) 878-9560

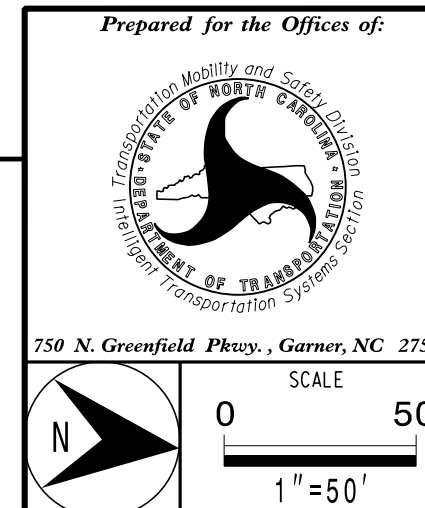

Prepared for the Offices of:

**MORRISVILLE PARKWAY
 ITS/COMMUNICATION CABLE
 AND CONDUIT ROUTING**

DIVISION 05 WAKE COUNTY TOWN OF CARY

PLAN DATE: NOVEMBER 2017 REVIEWED BY: C.B. HOLDEN

PREPARED BY: D.T. SEARS REVIEWED BY:

REVISIONS	INIT.	DATE

SIGNATURE: _____ DATE: 11/13/2017

CADD Filename: U5315_ITS_psh05.dgn

**DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED**