






SUMMARY OF QUANTITIES FOR SPAN "A"		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	179.5 SY	
HYDRO-DEMOLITION OF BRIDGE DECK	179.5 SY	
CLASS II SURFACE PREPARATION	-	
BRIDGE JOINT DEMOLITION	22.0 SF	
GROOVING BRIDGE DECK	1475.9 SF	

**NOTES:**

THE EXISTING BRIDGE DECK HAS AN ASPHALT WEARING SURFACE. IT IS POSSIBLE THAT CLASS II SURFACE PREPARATION MIGHT BE NECESSARY, BUT CANNOT BE ESTIMATED WITH THE AWS PRESENT. THE QUANTITY INDICATED IS FOR BIDDING PURPOSES ONLY. THE ACTUAL QUANTITY SHALL BE CONFIRMED AFTER SCARIFICATION OF BRIDGE DECK.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK. SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

-  - SCARIFYING AND HYDRO-DEMOLITION OF BRIDGE DECK
-  - APPROX. AREA CLASS II SURFACE PREPARATION
-  - BRIDGE JOINT DEMOLITION
-  - TEST LOCATIONS

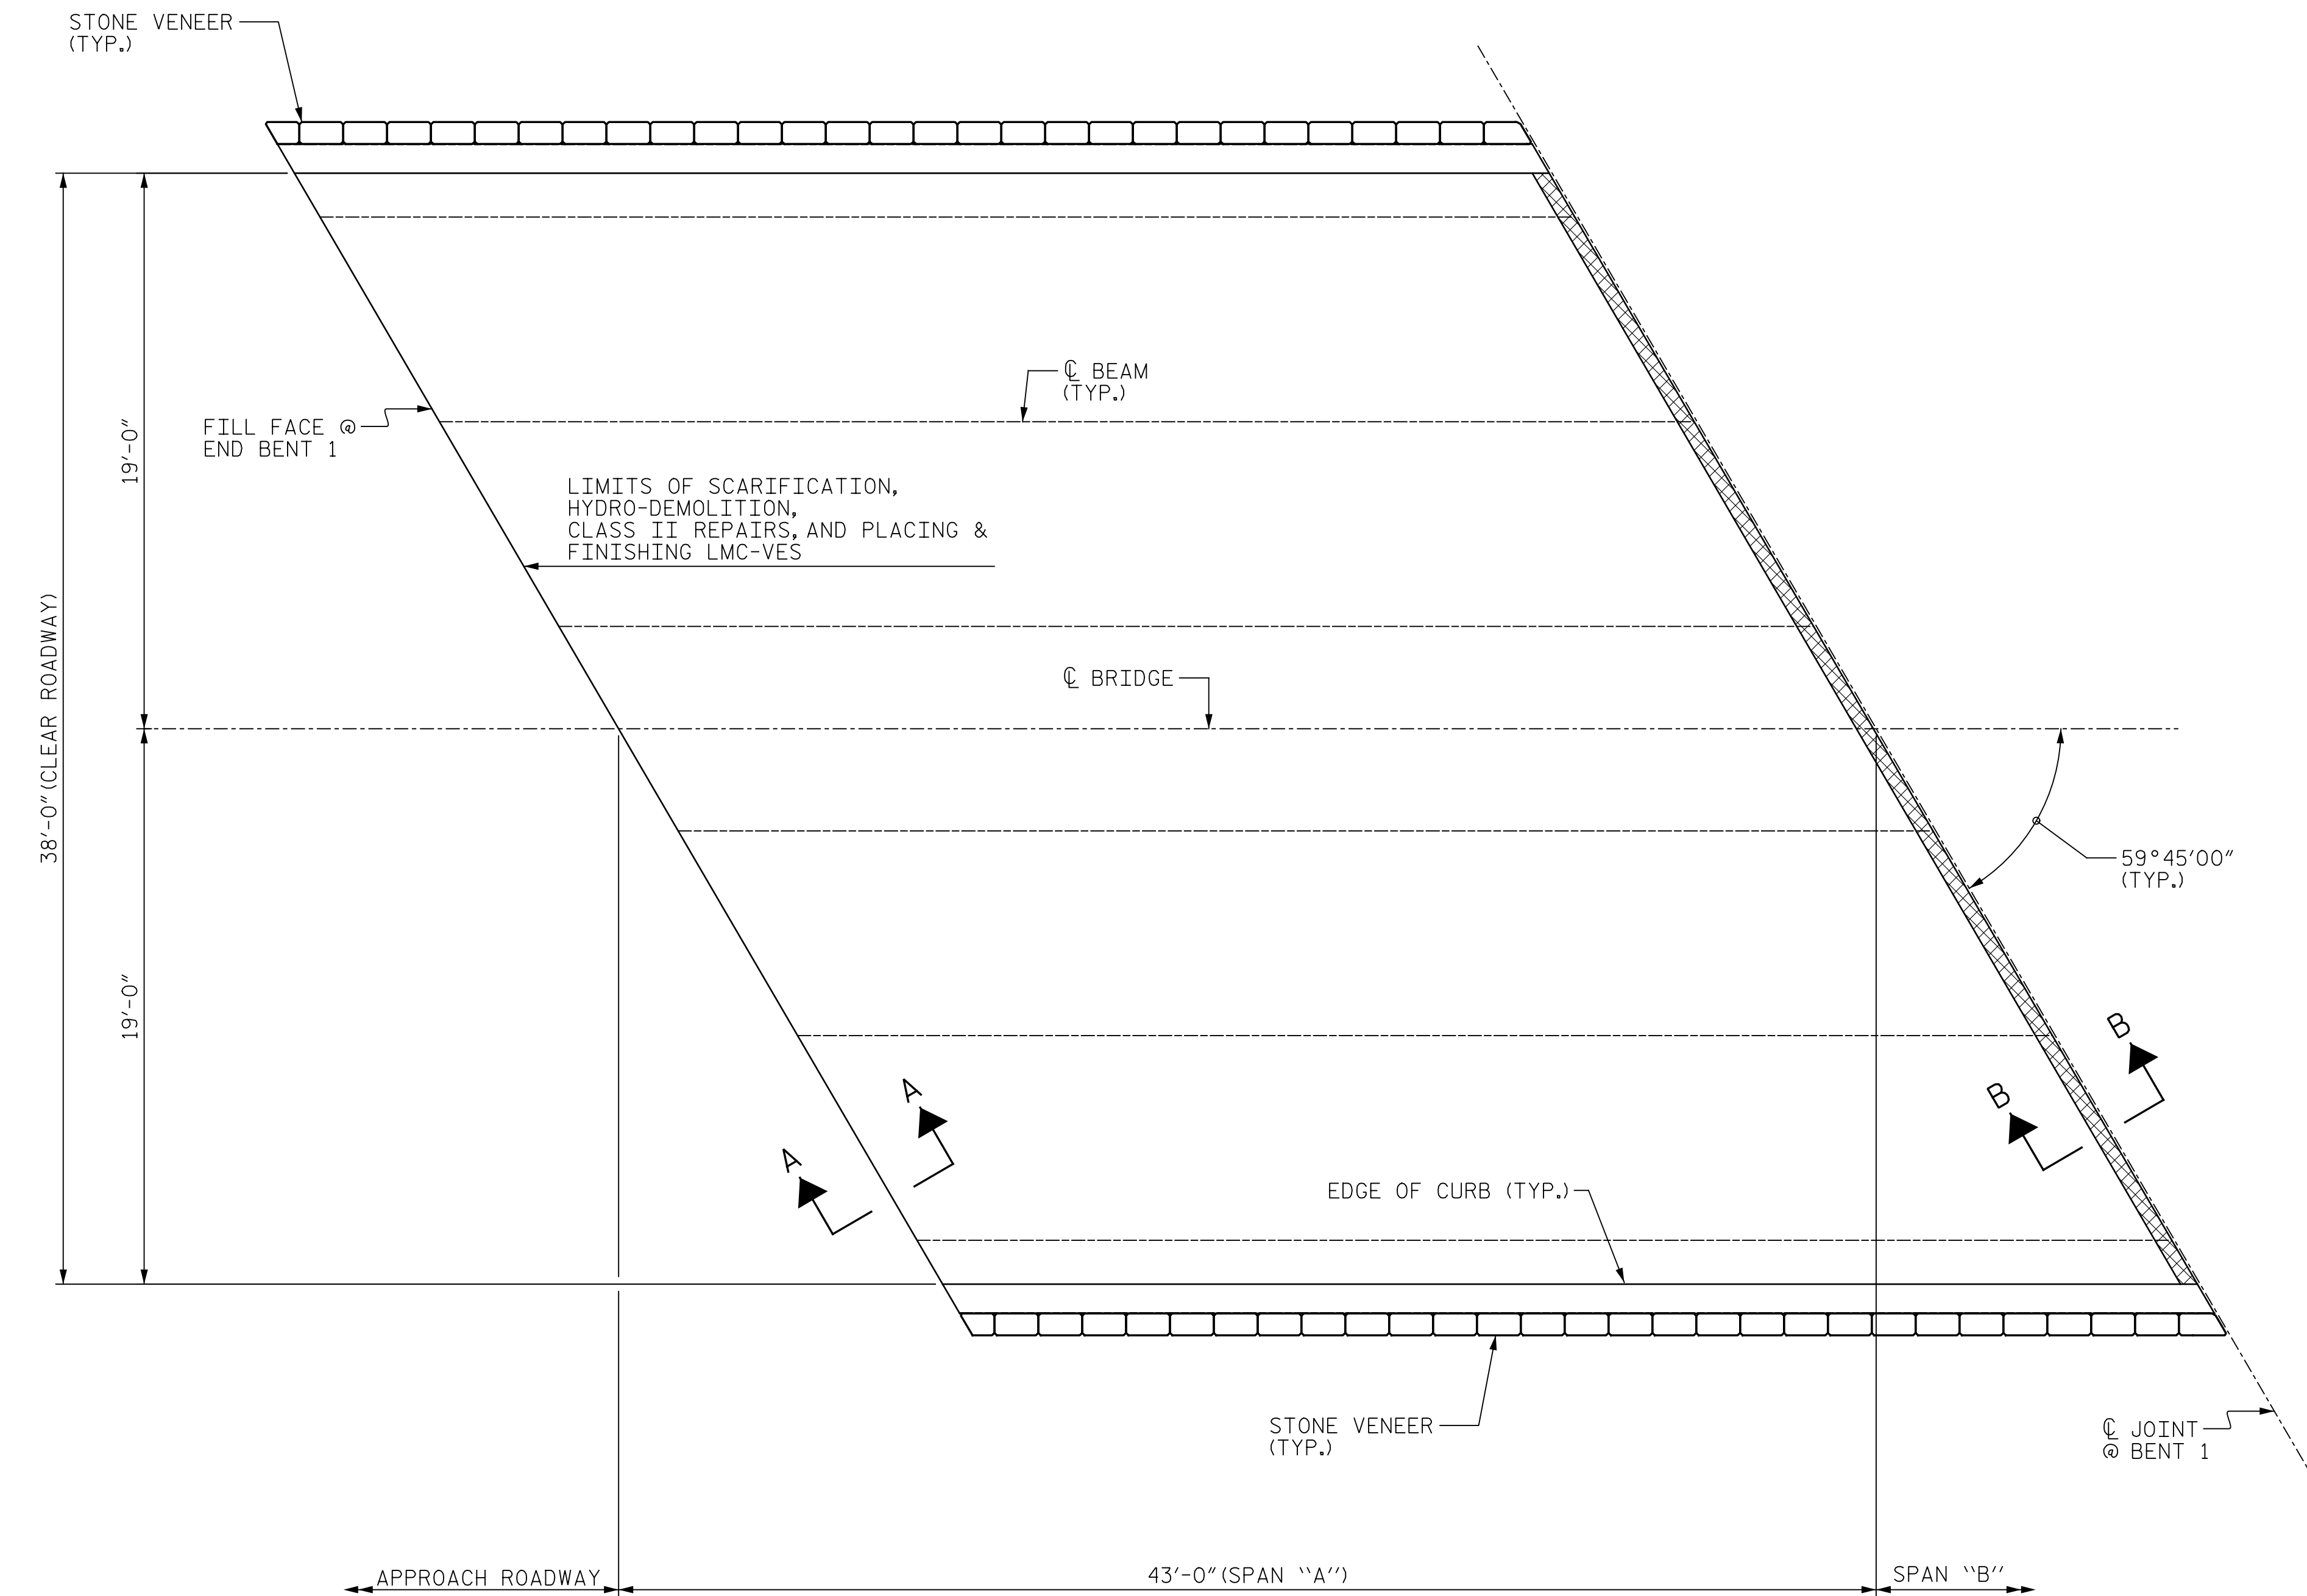

NO DEFICIENCIES NOTED DURING FIELD SCOPING INSPECTION. THE CONTRACTOR AND ENGINEER SHALL INSPECT THE DECK SURFACE AFTER SCARIFICATION FOR POTENTIAL CLASS II REPAIRS.

PROJECT NO. I-5889A  
BUNCOMBE COUNTY  
 BRIDGE NO. 366

**PLAN OF SPAN "A"**  
 (SEE SHEET NO. S-112 FOR SECTIONS A-A AND B-B)



STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**SURFACE PREPARATION  
 SPAN "A"**

DocuSigned by:  
*Eric B. Nelson*  
 11/16/2017  
 BA9F91782D7044A

DRAWN BY : M.A.LEE DATE : 9/2017  
 CHECKED BY : R.NELSON DATE : 10/2017

PLANS PREPARED BY:  
  
 Excellence Delivered **As Promised**

2610 Wycliff Road  
 Suite 102  
 Raleigh, NC 27607-3073  
 (919) 420-7660  
 [NC Lic. No. F-0270]

DOCUMENT NOT CONSIDERED  
 FINAL UNLESS ALL  
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-108
1			3			TOTAL SHEETS
2			4			208