





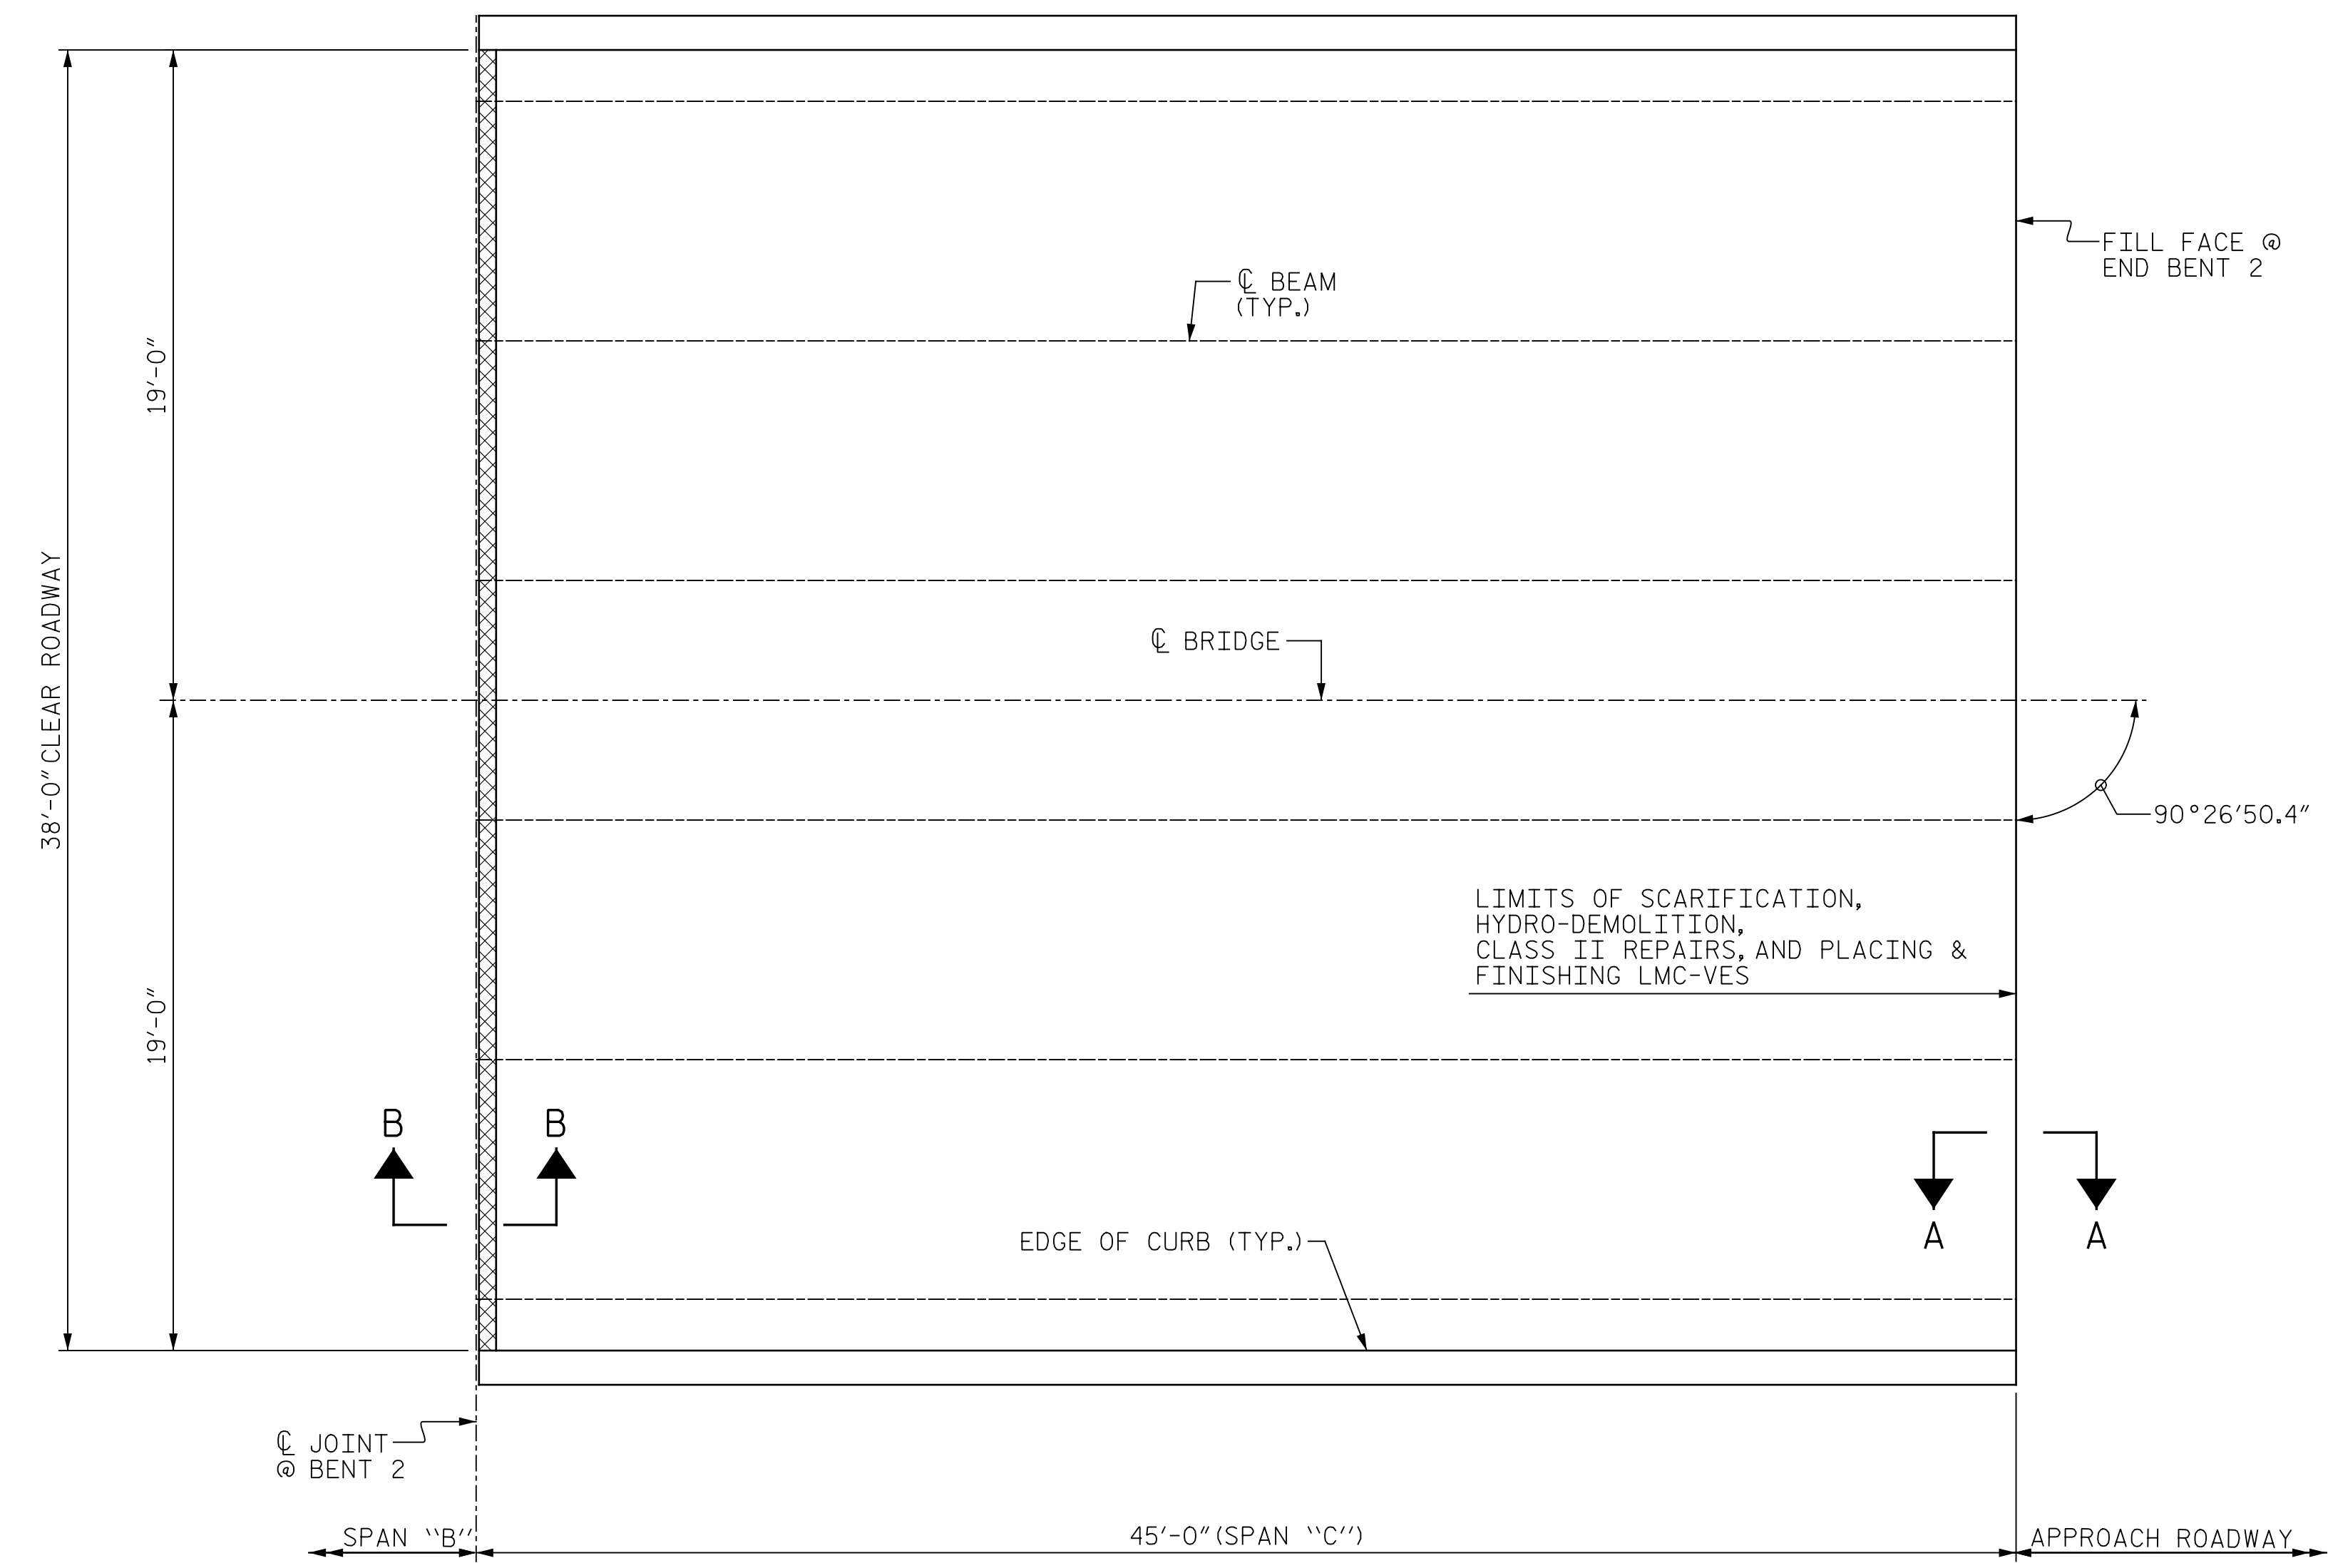
| SUMMARY OF QUANTITIES FOR SPAN "C" | | |
|------------------------------------|-----------|--------|
| | ESTIMATE | ACTUAL |
| SCARIFYING BRIDGE DECK | 187.9 SY | |
| HYDRO-DEMOLITION OF BRIDGE DECK | 187.9 SY | |
| CLASS II SURFACE PREPARATION | - | |
| BRIDGE JOINT DEMOLITION | 19 SF | |
| GROOVING BRIDGE DECK | 1545.8 SF | |

NOTES:

THE EXISTING BRIDGE DECK HAS AN ASPHALT WEARING SURFACE. IT IS POSSIBLE THAT CLASS II SURFACE PREPARATION MIGHT BE NECESSARY, BUT CANNOT BE ESTIMATED WITH THE AWS PRESENT. THE QUANTITY INDICATED IS FOR BIDDING PURPOSES ONLY. THE ACTUAL QUANTITY SHALL BE CONFIRMED AFTER SCARIFICATION OF BRIDGE DECK.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK. SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

-  - SCARIFYING AND HYDRO-DEMOLITION OF BRIDGE DECK
-  - APPROX. AREA CLASS II SURFACE PREPARATION
-  - BRIDGE JOINT DEMOLITION
-  - TEST LOCATIONS



NO DEFICIENCIES NOTED DURING FIELD SCOPING INSPECTION. THE CONTRACTOR AND ENGINEER SHALL INSPECT THE DECK SURFACE AFTER SCARIFICATION FOR POTENTIAL CLASS II REPAIRS.

PLAN OF SPAN "C"
(SEE SHEET NO. S-152 FOR SECTIONS A-A AND B-B)

PROJECT NO. I-5889A
BUNCOMBE COUNTY
 BRIDGE NO. 374



STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

**SURFACE PREPARATION
 SPAN "C"**

DRAWN BY : M.A.LEE DATE : 9/2017
 CHECKED BY : R.NELSON DATE : 10/2017

PLANS PREPARED BY:

 Excellence Delivered As Promised

2610 Wycliff Road
 Suite 102
 Raleigh, NC 27607-3073
 (919) 420-7660
 [NC Lic. No. F-0270]

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

| REVISIONS | | | | | | SHEET NO. |
|-----------|-----|-------|-----|-----|-------|--------------|
| NO. | BY: | DATE: | NO. | BY: | DATE: | S-151 |
| 1 | | | 3 | | | TOTAL SHEETS |
| 2 | | | 4 | | | 208 |