


SUMMARY OF QUANTITIES FOR SPAN "B"		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	258.3 SY	
HYDRO-DEMOLITION OF BRIDGE DECK	258.3 SY	
CLASS II SURFACE PREPARATION	-	
BRIDGE JOINT DEMOLITION	30.0 SF	
GROOVING BRIDGE DECK	2170.4 SF	

NOTES:

THE EXISTING BRIDGE DECK HAS AN ASPHALT WEARING SURFACE. IT IS POSSIBLE THAT CLASS II SURFACE PREPARATION MIGHT BE NECESSARY, BUT CANNOT BE ESTIMATED WITH THE AWS PRESENT. THE QUANTITY INDICATED IS FOR BIDDING PURPOSES ONLY. THE ACTUAL QUANTITY SHALL BE CONFIRMED AFTER SCARIFICATION OF BRIDGE DECK.

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED UPON SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING SCARIFICATION OF BRIDGE DECK. SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

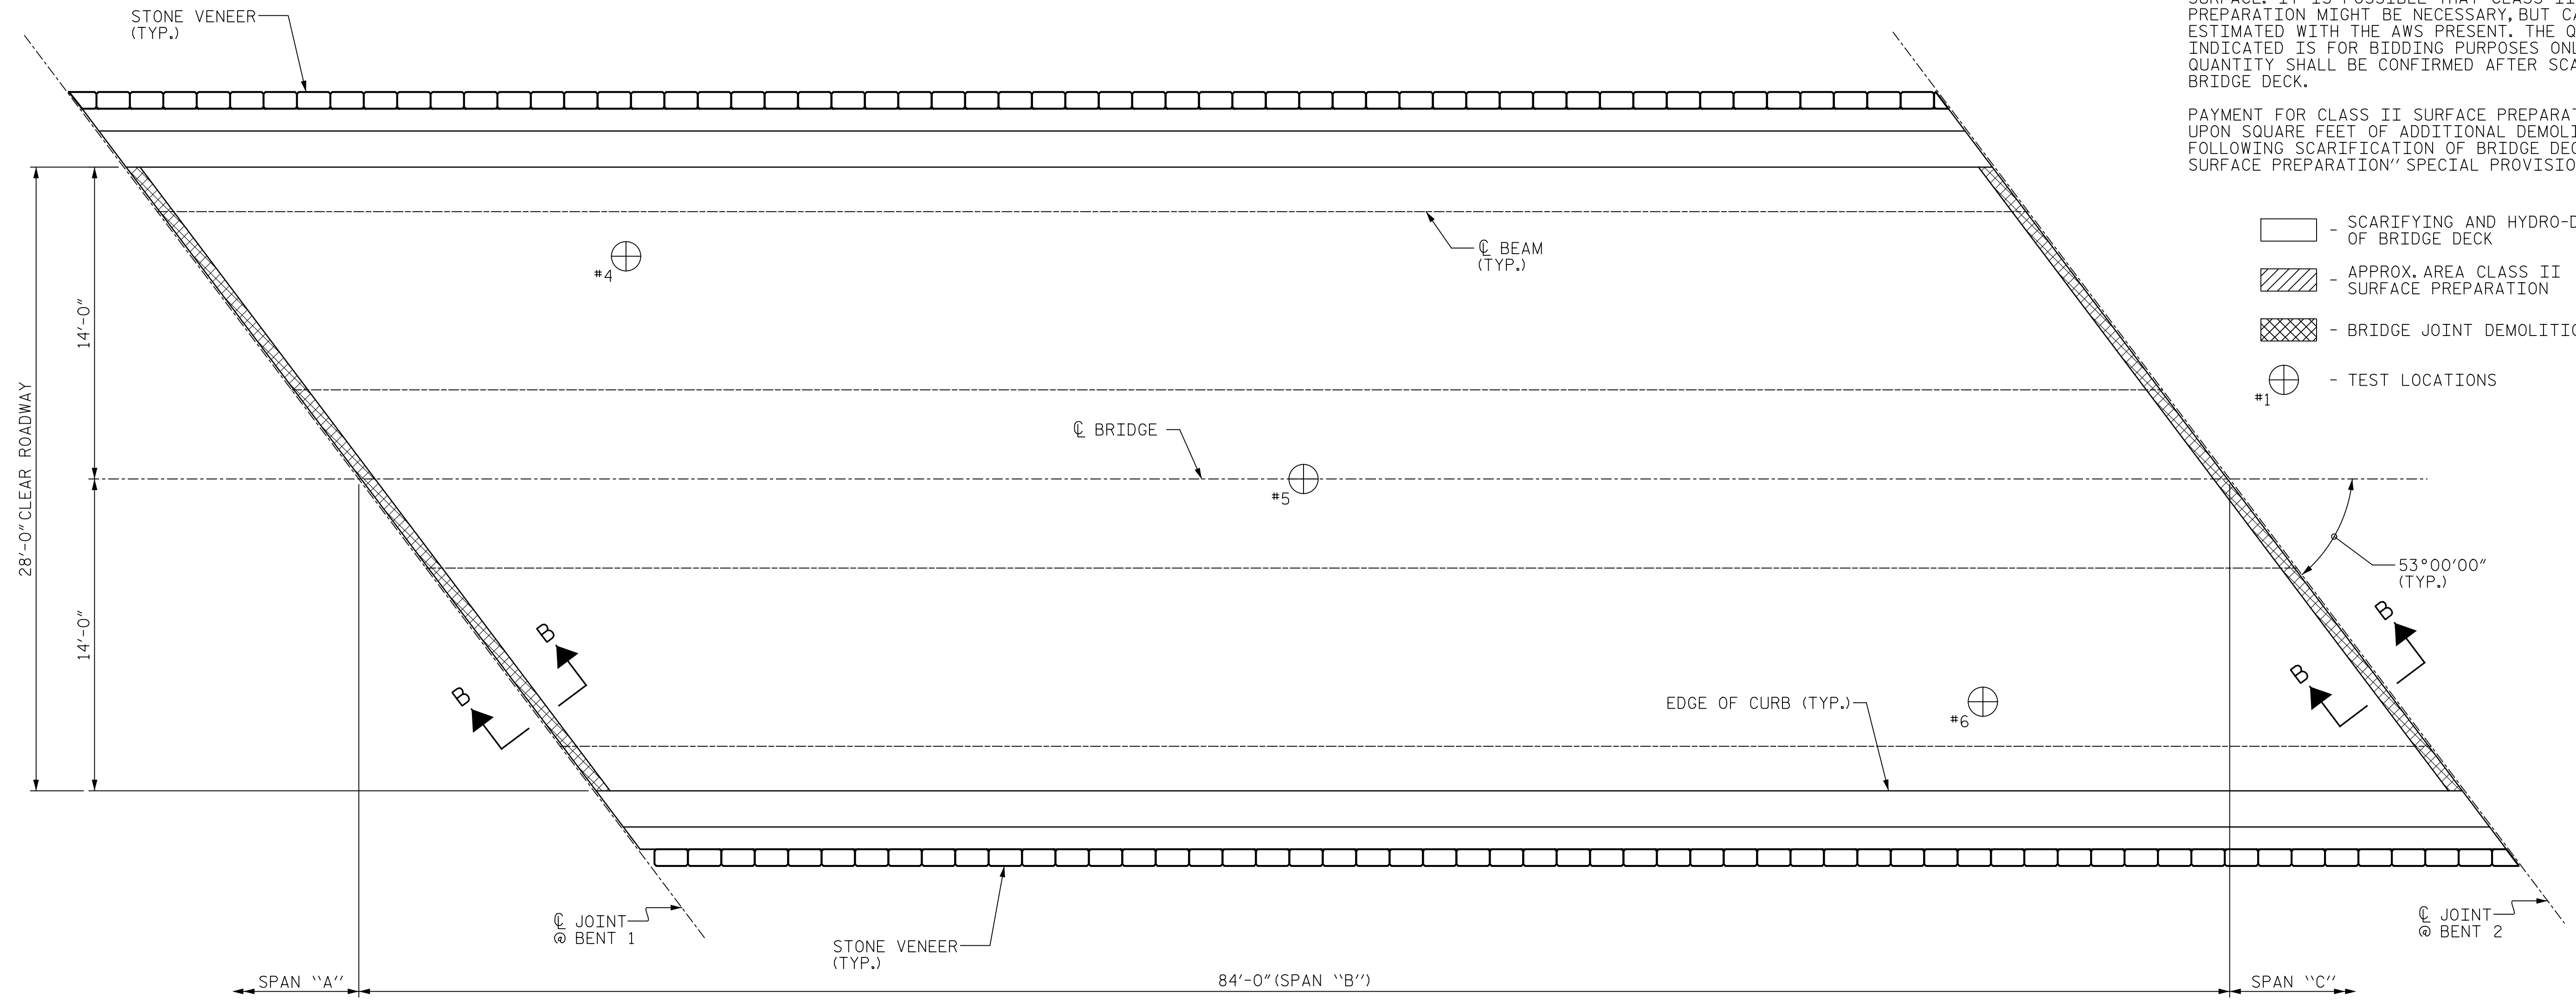

- SCARIFYING AND HYDRO-DEMOLITION OF BRIDGE DECK
- APPROX. AREA CLASS II SURFACE PREPARATION
- BRIDGE JOINT DEMOLITION
- TEST LOCATIONS

PLAN OF SPAN "B"
(SEE SHEET NO. S-170 FOR SECTION AND B-B)

PROJECT NO. I-5889A
BUNCOMBE COUNTY
 BRIDGE NO. 377

NO DEFICIENCIES NOTED DURING FIELD SCOPING INSPECTION. THE CONTRACTOR AND ENGINEER SHALL INSPECT THE DECK SURFACE AFTER SCARIFICATION FOR POTENTIAL CLASS II REPAIRS.



STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

**SURFACE PREPARATION
 SPAN "B"**

DRAWN BY: M.A. LEE DATE: 10/2017
 CHECKED BY: R. NELSON DATE: 10/2017

PLANS PREPARED BY:
Gannett Fleming
 Excellence Delivered *As Promised*

2610 Wycliff Road
 Suite 102
 Raleigh, NC 27607-3073
 (919) 420-7660
 NC Lic. No. F-0270

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			208
2			4			