


TOP OF CAP

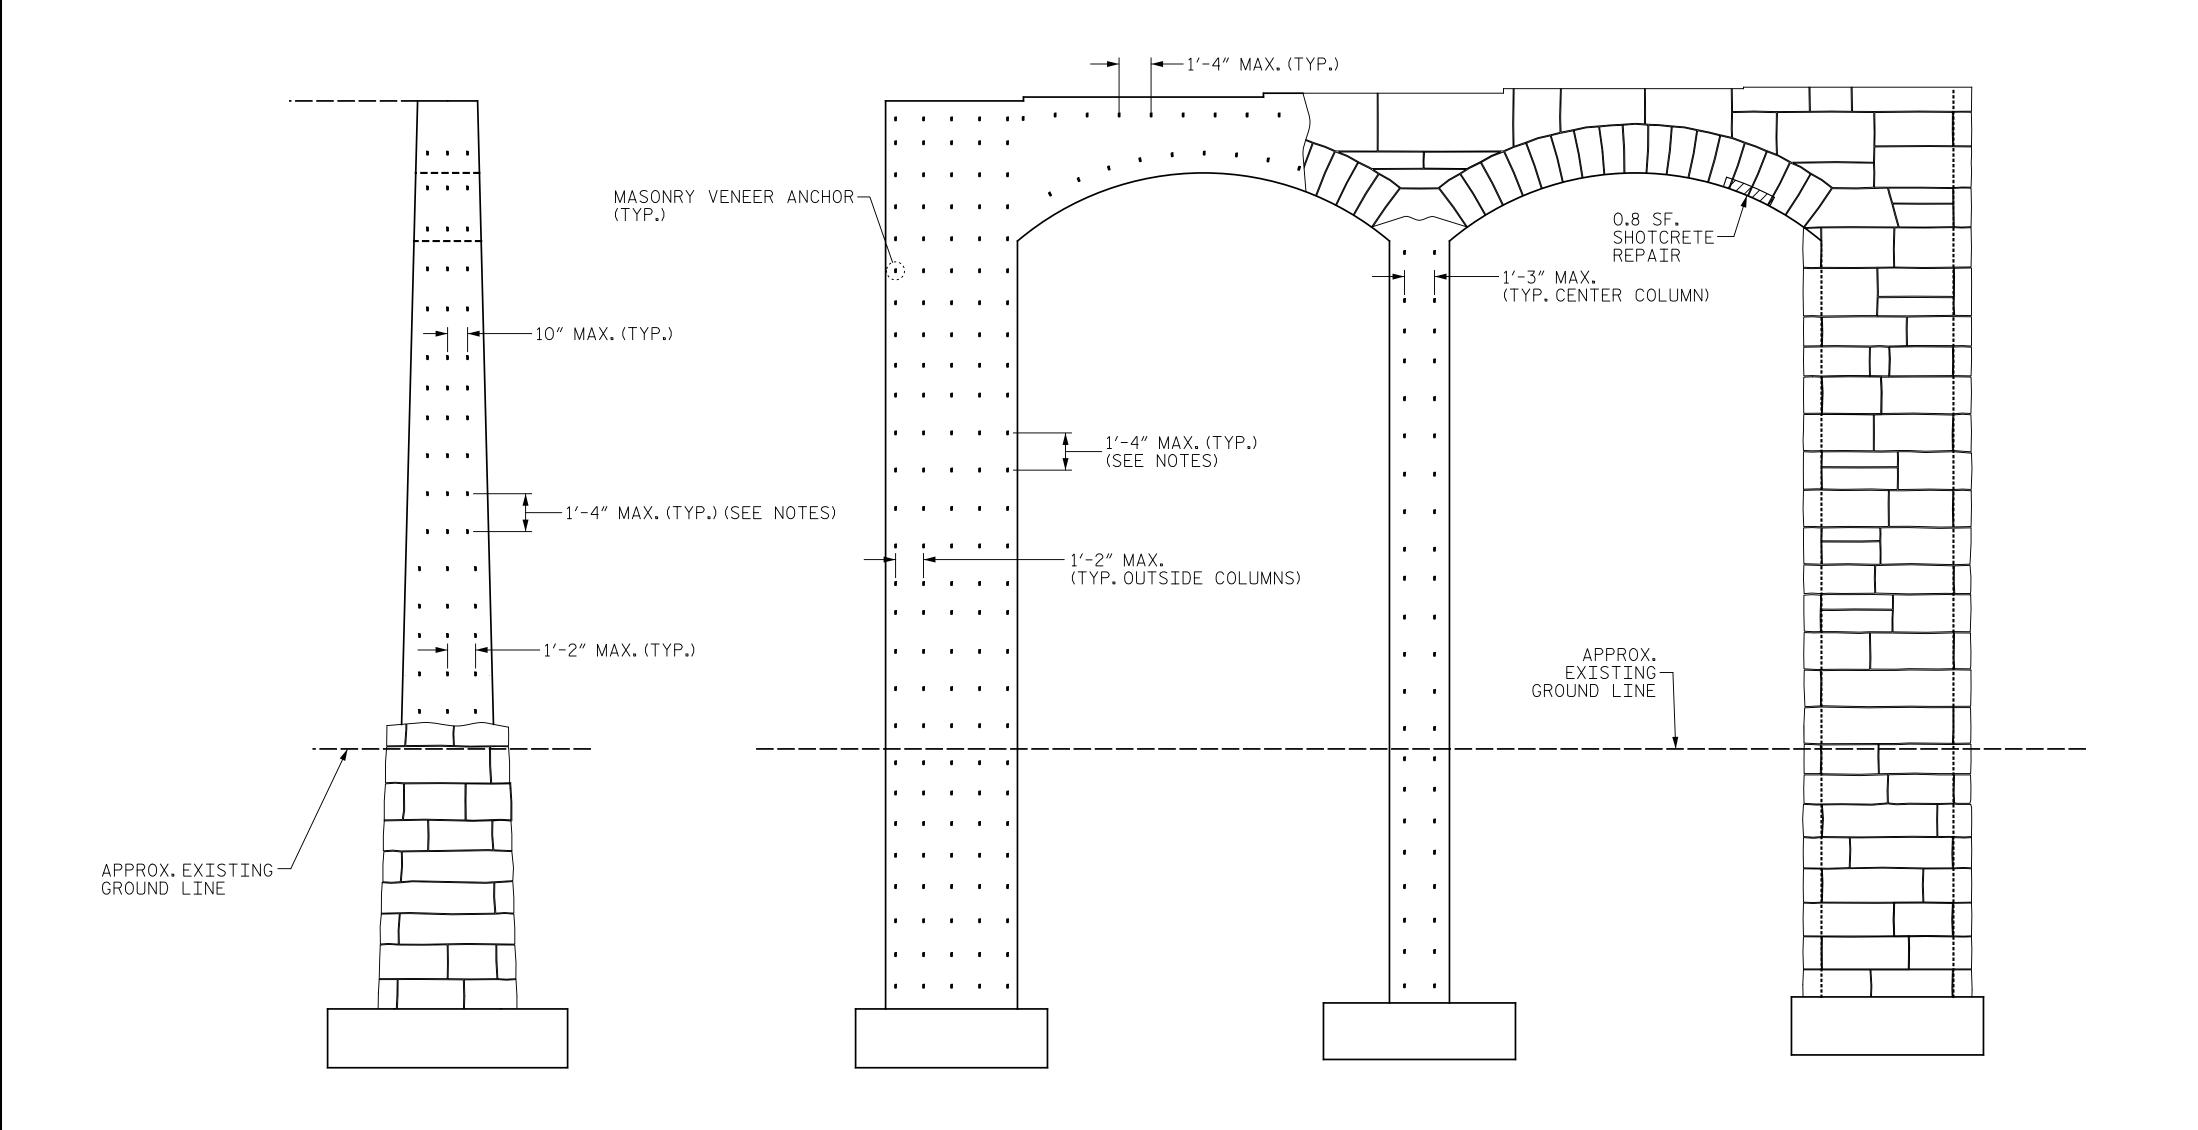

END VIEW NORTH END (LOOKING SOUTH)

SPAN A (LOOKING EAST)

BENT 1

AS- BUILT REPAIR QUANTITY TABLE

| BENT 1 REPAIRS | QUANTITIES | | | | | |
|--------------------------|------------|---|-------------|------------|-------------|--------------|
| | ESTIMATE | | | ACTUAL | | |
| SHOTCRETE REPAIRS | AREA SF | V | OLUME CF | AREA SF | DEPTH FT | VOLUME CF |
| CAP (VERTICAL FACE) | 0.8 | | 0.4 | | | |
| CAP (HORIZONTAL, CORNER) | 2.8 | | 1.4 | | | |
| COLUMN | 0 | | 0 | | | |
| | | | | | | |
| ANCHORED VENEER | | | AREA SF | | | AREA SF |
| | | | 1157.2 | | | |
| | | | | | | |
| EPOXY COATING | | | AREA SF | | | AREA SF |
| TOP OF CAP | | | 92.5 | | | |
| | | | 0 | | | |

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MIN. OF 1"BEHIND REBAR AND MIN. 2"CL TO SAWCUT. SEE REPAIR DETAILS.

NOTES:

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE, IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE INSPECTOR OR ENGINEER THE CONTRACTOR SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE REPAIR QUANTITY TABLE.

FINAL REPAIR QUANTITIES WILL BE DETERMINED AFTER THE STONE VENEER IS REMOVED. QUANTITIES IN TABLE ARE ESTIMATED.

FOR BENT REPAIRS, SEE "TYPICAL CAP AND COLUMN REPAIR DETAILS" SHEET.

SHOTCRETE REPAIRS MAY BE REPLACED WITH CONCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

FOR SHOTCRETE REPAIRS, SEE SPECIAL PROVISIONS.

FOR EPOXY COATING, SEE SPECIAL PROVISIONS.

- SHOTCRETE REPAIR

- CONCRETE REPAIR

PROJECT NO. I-5889A BUNCOMBE _ COUNTY 378 BRIDGE NO. _



STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

> STONE VENEER BENT DETAILS

BENT 1 SPAN A FACE

SHEET NO. REVISIONS S-202 NO. BY: DATE: DATE: BY: TOTAL SHEETS

Suite 102

Raleigh NC 27607-3073
(919) 420-7660 Excellence Delivered As Promised NC Lic. No. F-0270

2610 Wycliff Road

OCUMENT NOT CONSIDEREI FINAL UNLESS ALL SIGNATURES COMPLETED

_ DATE : <u>10/2017</u> M.A.LEE DRAWN BY : ___ _ DATE : <u>10/2017</u> R.NELSON CHECKED BY : .