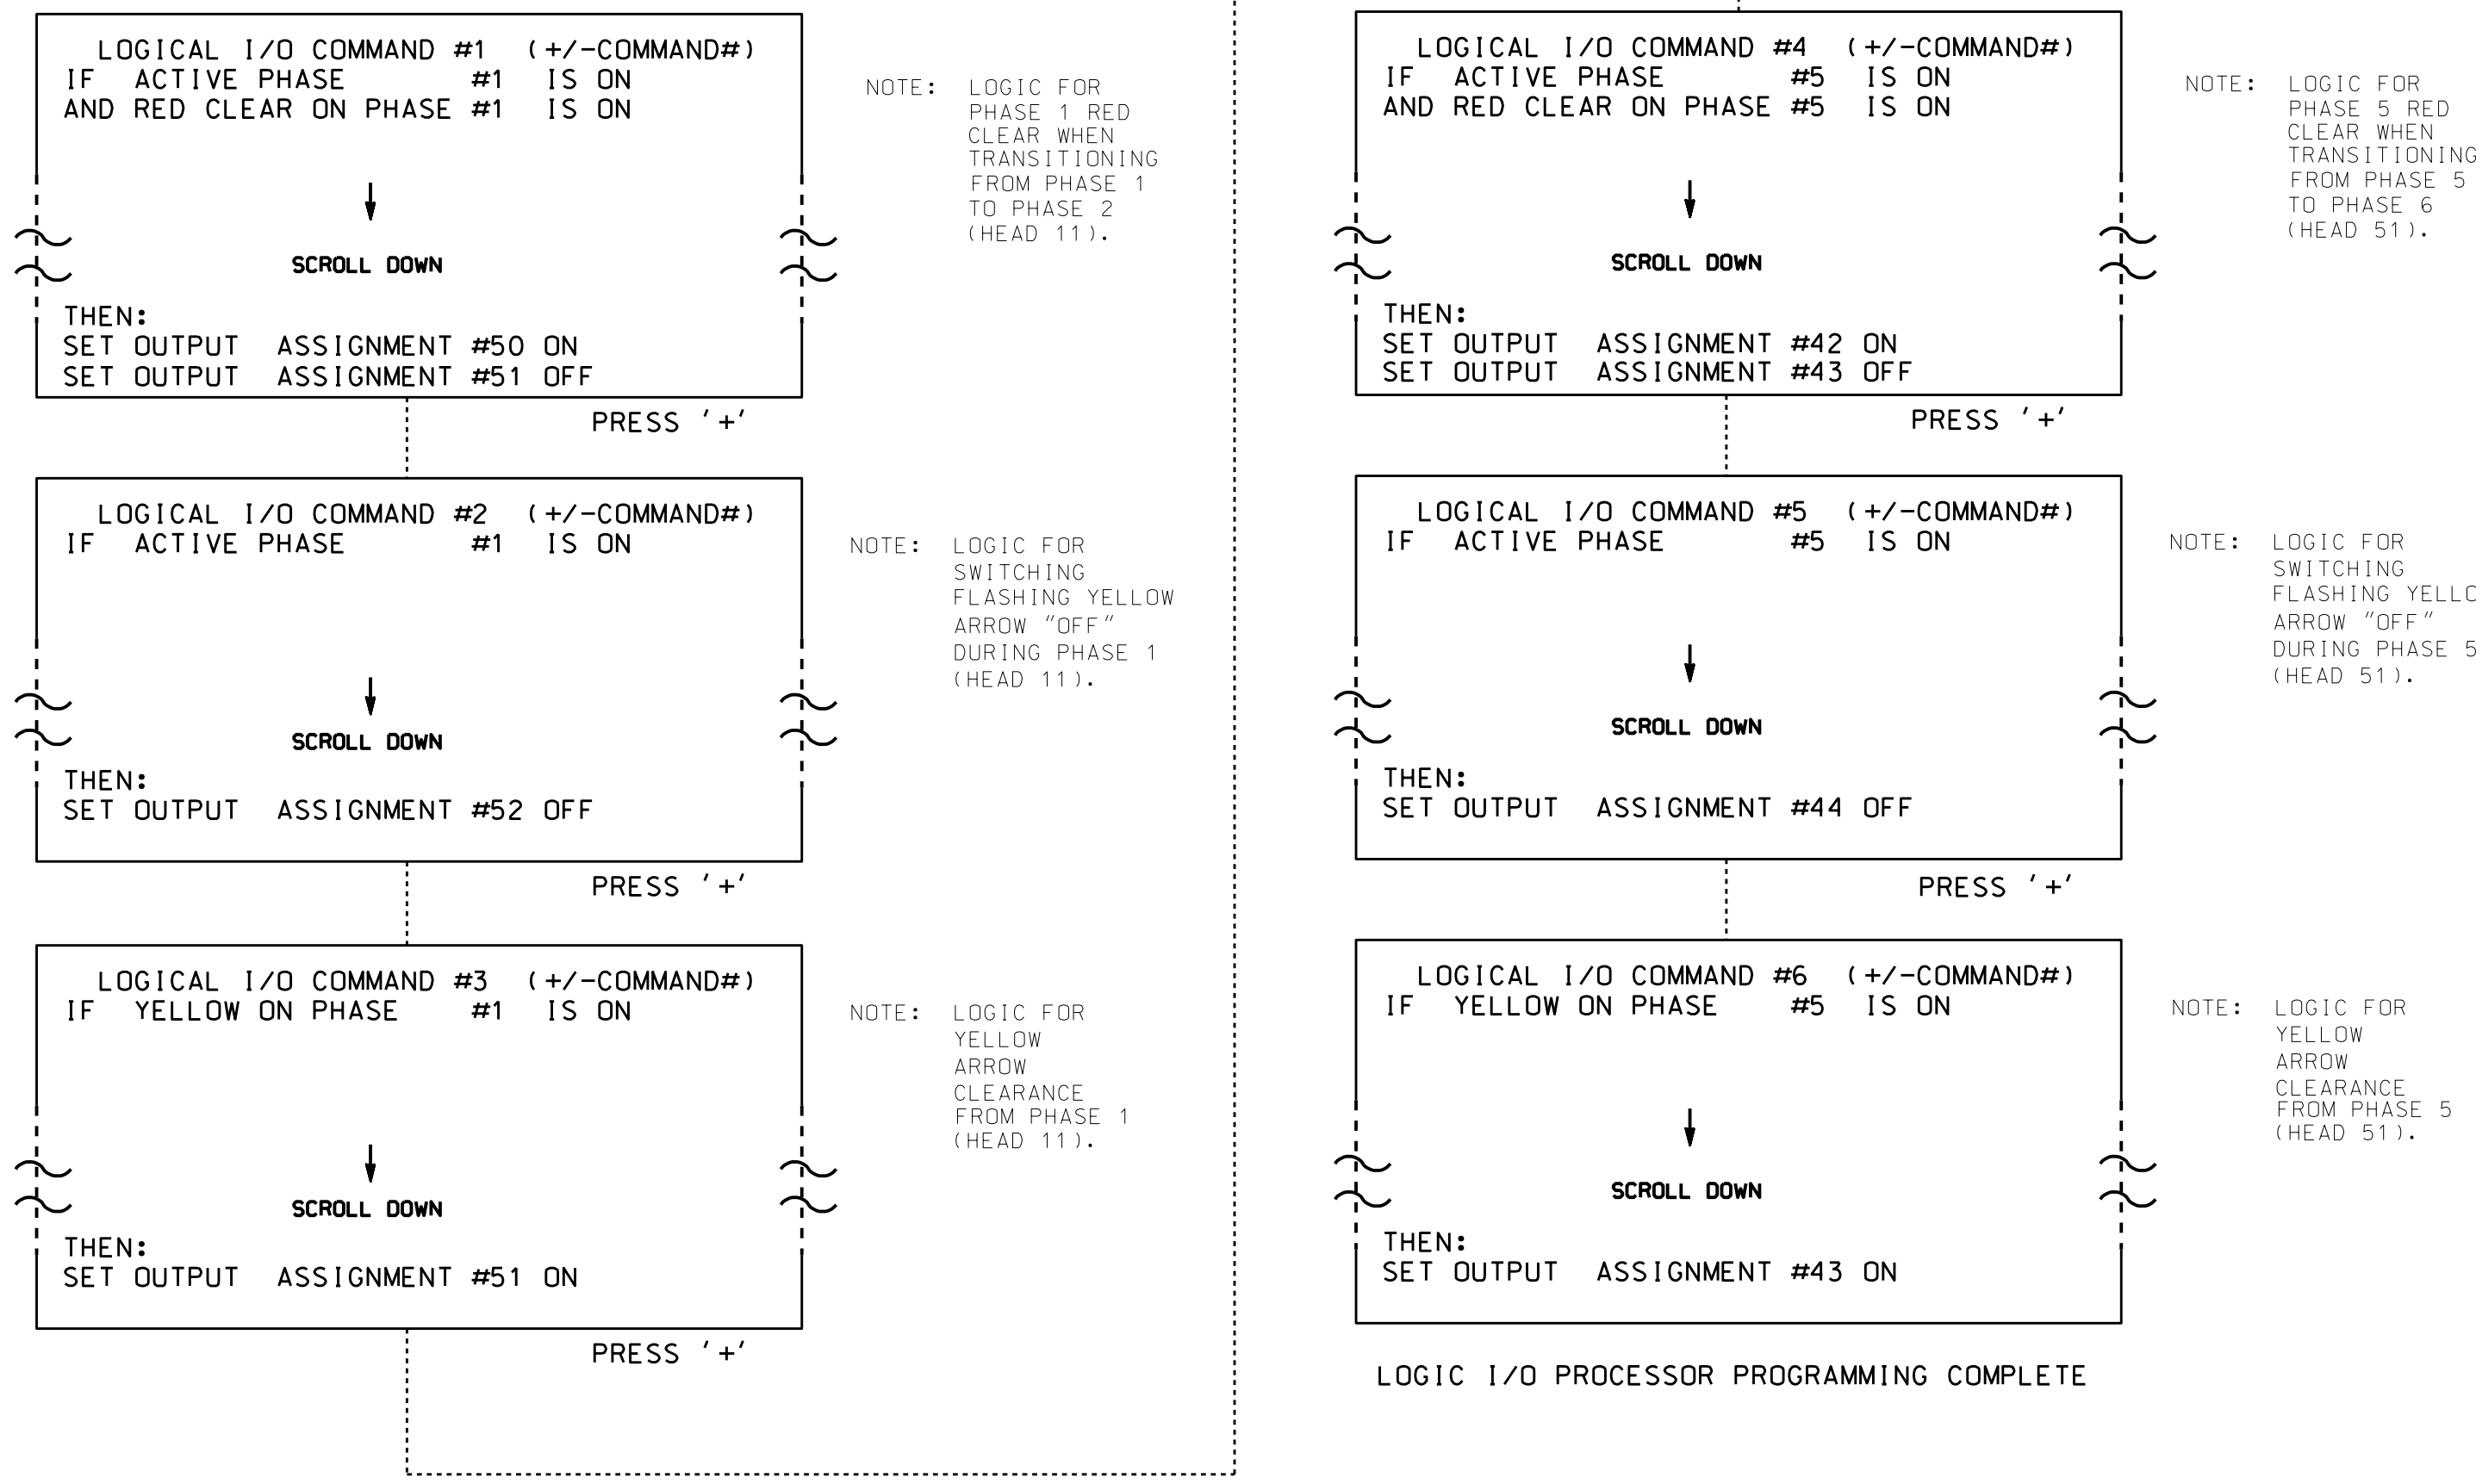


LOGICAL I/O PROCESSOR PROGRAMMING DETAIL TO PRODUCE SPECIAL FYA-PPLT SIGNAL SEQUENCE

(program controller as shown below)

- FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2, 3, 4, 5 AND 6.
- FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).



OUTPUT REFERENCE SCHEDULE
OUTPUT 42 = Overlap C Red
OUTPUT 43 = Overlap C Yellow
OUTPUT 44 = Overlap C Green
OUTPUT 50 = Overlap A Red
OUTPUT 51 = Overlap A Yellow
OUTPUT 52 = Overlap A Green

OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS
 PHASE: 12345678910111213141516
 VEH OVL PARENTS: XX
 VEH OVL NOT VEH:
 VEH OVL NOT PED:
 VEH OVL GRN EXT:
 STARTUP COLOR: _ RED _ YELLOW _ GREEN
 FLASH COLORS: _ RED _ YELLOW X GREEN
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
 FLASH YELLOW IN CONTROLLER FLASH?...Y
 GREEN EXTENSION (0-255 SEC)...0.0
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
 OUTPUT AS PHASE # (0=NONE, 1-16)...0

← NOTICE GREEN FLASH

PRESS '+' TWICE

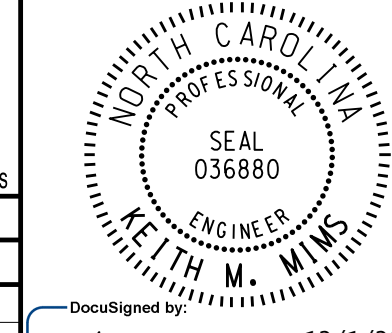

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
 PHASE: 12345678910111213141516
 VEH OVL PARENTS: XX
 VEH OVL NOT VEH:
 VEH OVL NOT PED:
 VEH OVL GRN EXT:
 STARTUP COLOR: _ RED _ YELLOW _ GREEN
 FLASH COLORS: _ RED _ YELLOW X GREEN
 SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
 FLASH YELLOW IN CONTROLLER FLASH?...Y
 GREEN EXTENSION (0-255 SEC)...0.0
 YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
 RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
 OUTPUT AS PHASE # (0=NONE, 1-16)...0

← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0946T3
 DESIGNED: September 2017
 SEALED: 11-28-17
 REVISED: N/A

06-0946-2017 11-28
 S:\IT\SS\06-0946\15-Signal\work\hgr\06-0946_smc.ele...xxxt.dgn
 JPeterson

Electrical Detail - Sheet 2 of 2 - Temp.3 (Phase II-5)		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED						
ELECTRICAL AND PROGRAMMING DETAILS FOR:	NC 59 (South Main Street) at I-95 Bus./US 301 SB Ramp / SR 2285 (Shipman Road)	SEAL 						
Prepared In the Offices of:  750 N. Greenfield Pkwy, Garner, NC 27529	Division 6 Cumberland County Hope Mills PLAN DATE: November 2017 REVIEWED BY: PREPARED BY: James Peterson REVIEWED BY:	DocuSigned by: Keith M. Mins 12/1/2017 2520726E6C73465						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		REVISIONS	INIT.	DATE				SIG. INVENTORY NO. 06-0946T3
REVISIONS	INIT.	DATE						