
SIGNAL COMMUNICATIONS— SYSTEM 1

PROJECT REFERENCE NO. SCP 15 U-2525C

NEW AERIAL SPLICE ENCLOSURE FOR FUTURE SIGNAL

1. UNLESS OTHERWISE NOTED, CAP AND STORE UNUSED FIBERS.

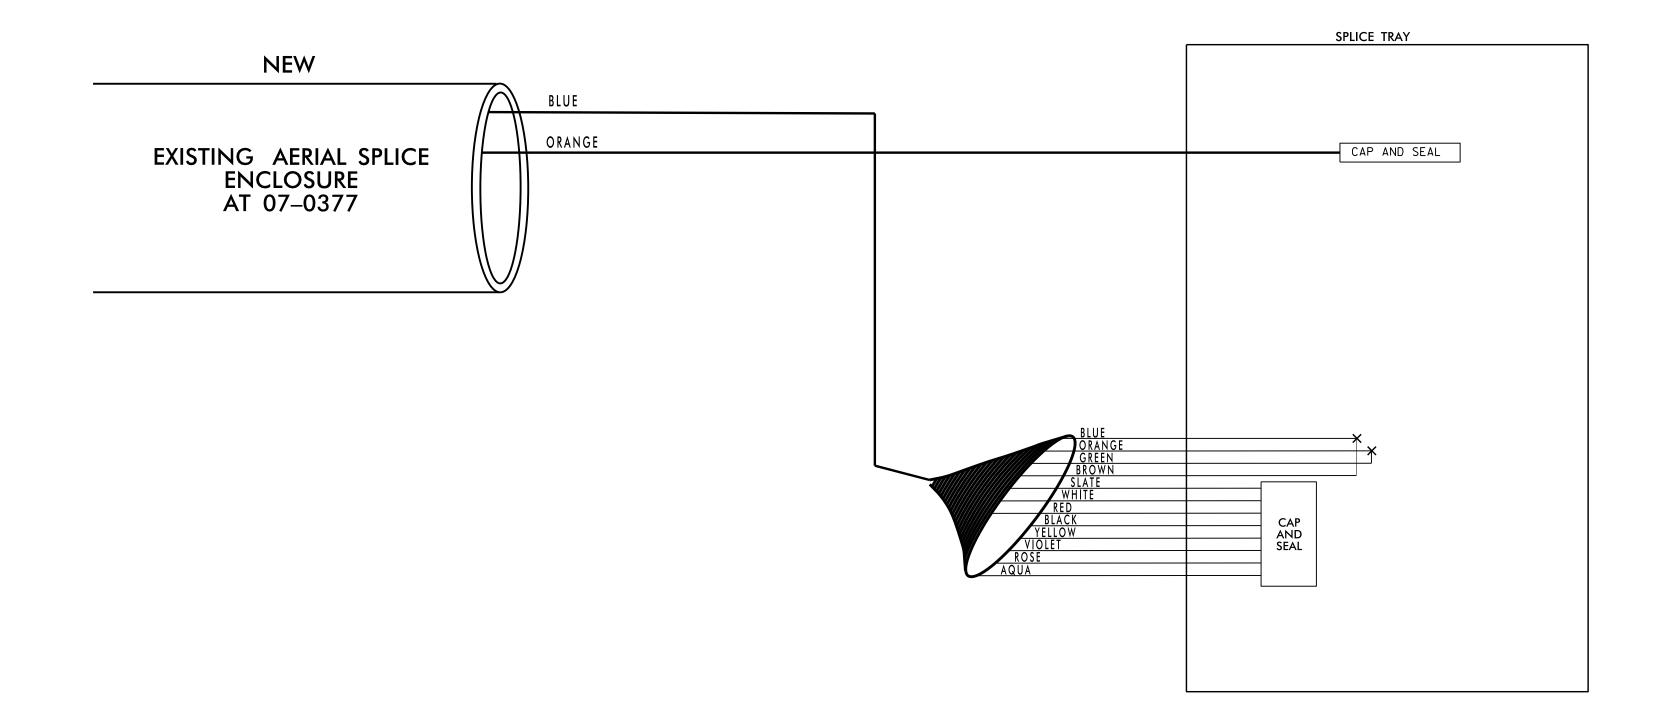

FUTURE CABINET TO BE INSTALLED BY OTHERS

<u>LEGEND</u>

(1) BLUE (7) RED

COLOR CODE TIA⁄EIA 598–A

(2) ORANGE

X - FUSION SPLICE INDIVIDUAL FIBER

(9) YELLOW (3) GREEN (4) BROWN (10) VIOLET

(8) BLACK

BUFFER TUBE SPLICE OR EXPRESS ENTIRE BUFFER TUBE AS NOTED

(5) SLATE (11) ROSE (12) AQUA (6) WHITE

1) FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM COMMUNICATIONS CABLE, CONTACT THE CITY OF GREENSBORO SIGNAL SYSTEM COORDINATOR, DALE MCCRAW, AT (336) 552-5984 TO ARRANGE FOR THE CITY OF GREENSBORO TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITEDTO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE CITY SIGNAL SYSTEM COORDINATOR AFTER ALL WORK HAS BEEN PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.

2) INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING: REFERENCE SECTION 1731 "FIBER OPTIC SPLICE ENCLOSURE"

- 1) SPLICE LOCATION
- 2) DATE
- 3) COMPANY NAME


4) NAME OF INDIVIDUAL PERFORMING THE SPLICING

PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPLICE TRAY AND INFORMATION SHOWN ABOVE (1-4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS.

TMP PHASE 1

N/A

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED



SPLICE DETAILS

DIVISION 07 GUILFORD CO. ——Docusigned GyREENSBORO PLAN DATE: OCTOBER 2017 REVIEWED BY: 1. N. Lucy

PREPARED BY: H. T. BERGGREN REVIEWED BY: 09F5DB4CBED3443. REVISIONS INIT. DATE

Moled Aslami