

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**


**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**

**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN  
JOHNSTON COUNTY**

**LOCATION: SR 2302 (RICKS ROAD) FROM US 70 TO US 301 IN SELMA**

|   |                     |
|---|---------------------|
| TIP NO.<br>U-5795   | SHEET NO.<br>SIGN-1 |
| APPROVED: _____   |                     |
| DATE: _____   |                     |
|  |                     |
| <b>DOCUMENT NOT CONSIDERED FINAL<br/>UNLESS ALL SIGNATURES COMPLETED</b>            |                     |

**T.I.P.: U-5795**

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

| STD. NO. | TITLE  |
|----------|--|
| 904.10   | ORIENTATION OF GROUND MOUNTED SIGNS                          |
| 904.50   | MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS |

**GENERAL NOTES**

- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

**SUMMARY OF QUANTITIES**

| ITEM NO.   | ITEM DESCRIPTION                   | QUANTITY | UNIT |
|------------|------------------------------------|----------|------|
| DESC. NO.  | SECT. NO.                          |          |      |
| 4072000000 | 903                                | 155      | L.F. |
| 4102000000 | 904                                | 17       | EA.  |
| 4155000000 | 907                                | 18       | EA.  |
|            | SUPPORTS, 3 LB STEEL U-CHANNEL     |          |      |
|            | SIGN ERECTION, TYPE E              |          |      |
|            | DISPOSAL OF SIGN SYSTEM, U-CHANNEL |          |      |

**PAY ITEM NOTES**

- 1 SIGN ERECTION, TYPE D, E, AND F
- 2 DISPOSAL OF SIGN SYSTEM, U-CHANNEL


**INDEX**

| SHEET NO. | DESCRIPTION        |
|-----------|--------------------|
| SIGN-1    | TITLE SHEET        |
| SIGN-2    | E SHEET            |
| SIGN-3-5  | SIGN DETAIL SHEETS |

**CONTRACT:**

**PLAN REVIEWED BY: N.C.D.O.T. DIVISION 4**

|                                |                                  |
|--------------------------------|----------------------------------|
| <b>MATT CLARKE, P.E.</b>       | PROJECT ENGINEER                 |
| <b>RUSSELL BROADWELL, P.E.</b> | DEPUTY DIVISION TRAFFIC ENGINEER |

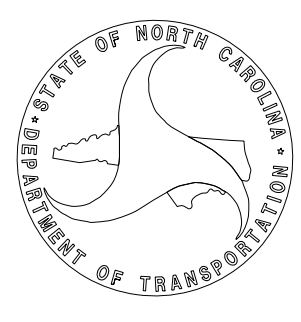


**PLAN PREPARED BY: VHB Engineering NC, P.C.**

**A. Matthew Thigpen, PE** PROJECT ENGINEER




APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_

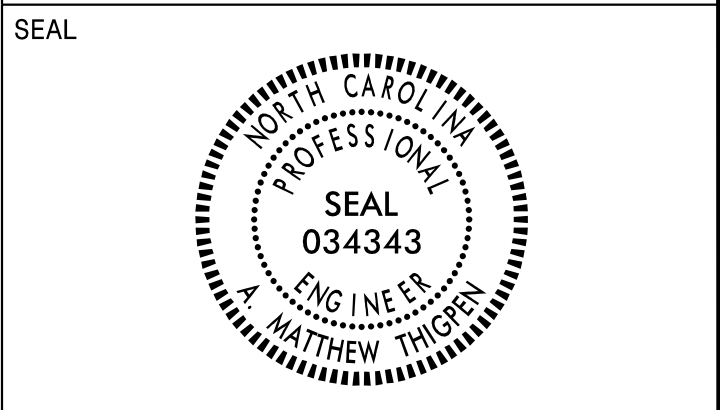


**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

401 QUANTITY REQ'D 4

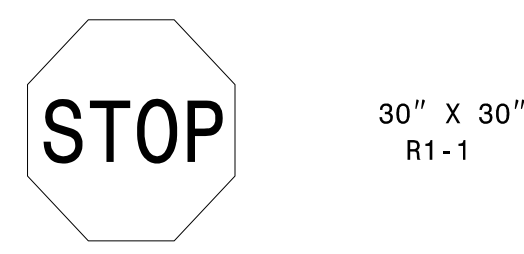


ONE "U" POST PER SIGN

405 QUANTITY REQ'D 3

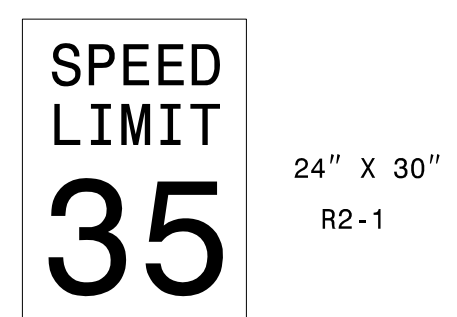

ONE "U" POST PER SIGN

402 QUANTITY REQ'D 1

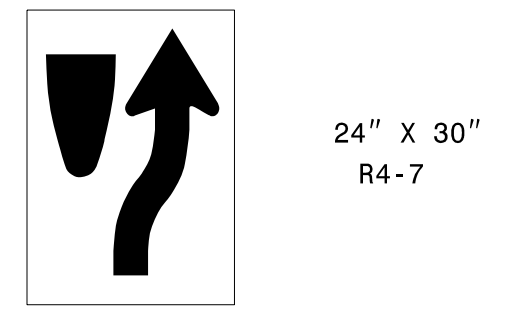

ONE "U" POST PER SIGN

406 QUANTITY REQ'D 2




ONE "U" POST PER SIGN

403 QUANTITY REQ'D 2




ONE "U" POST PER SIGN

407 QUANTITY REQ'D 2

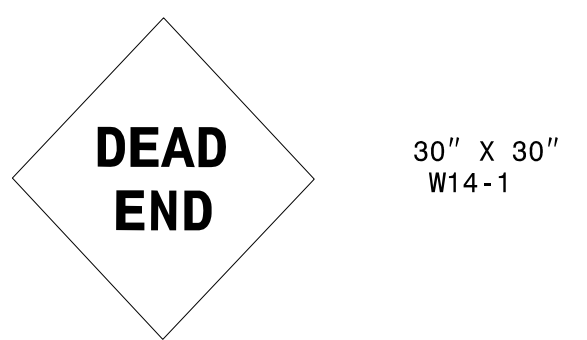


ONE "U" POST PER SIGN

404 QUANTITY REQ'D 1

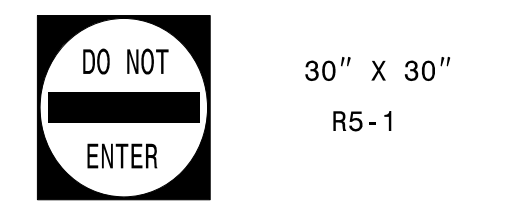

ONE "U" POST PER SIGN

408 QUANTITY REQ'D 1

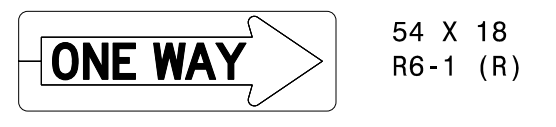

TWO "U" POSTS PER SIGN

409 QUANTITY REQ'D 1



ONE "U" POST PER SIGN

**TYPE "E" SIGNS**

I:\10\2017  
 \vrb\proj\Raleigh\38286.05 NCDOT U-5795 Rcks Road\NCDOT\Traffic\Signing\CADD\Signing Layout\Plans\PEF\_Engseed 11-23-15.dgn  
 User:mtigpen



APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_

SEAL



DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

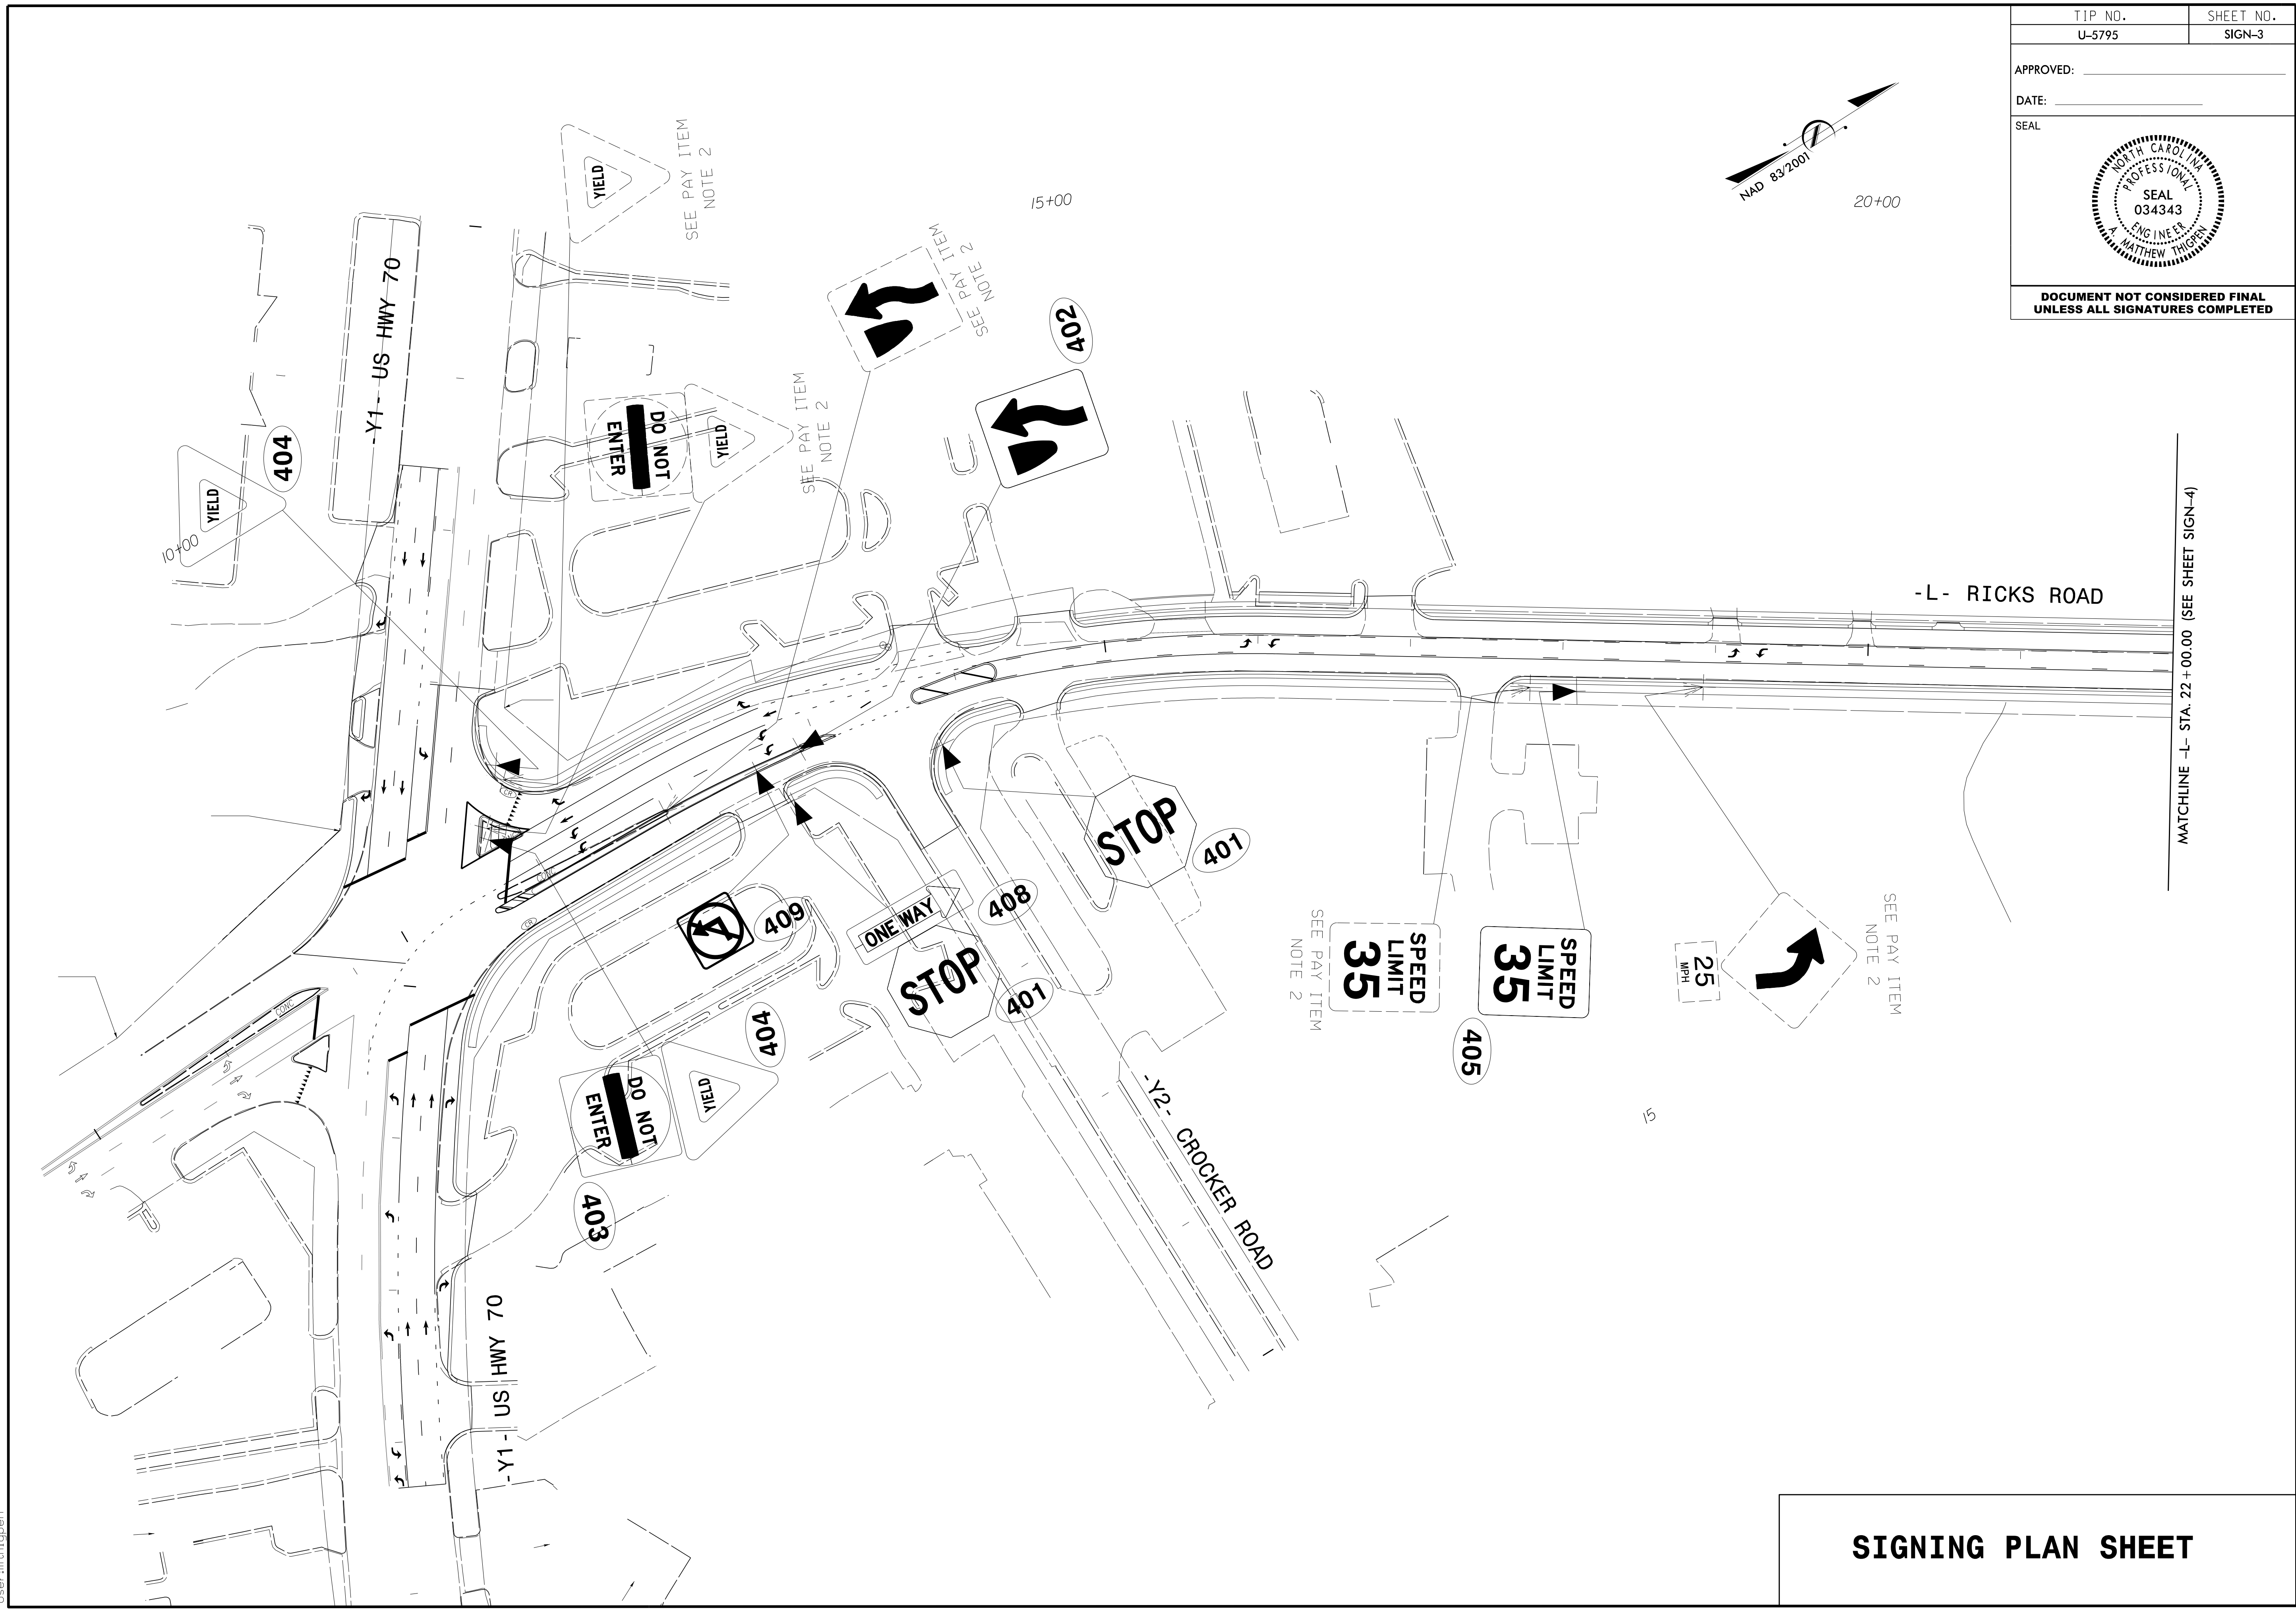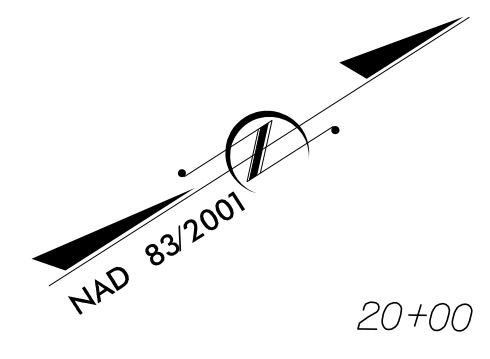

MATCHLINE -L- STA. 22+00.00 (SEE SHEET SIGN-4)

**SIGNING PLAN SHEET**

1/10/2017  
\\vrb-prc01\raleigh\38286.05 NCDOT U-5795 Ricks Road\NCDOT\Traffic\Signing\CADD\Signing Layout\Plans\U5795\_sgn\_psh04.dgn  
User:mttopen


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_

SEAL



**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

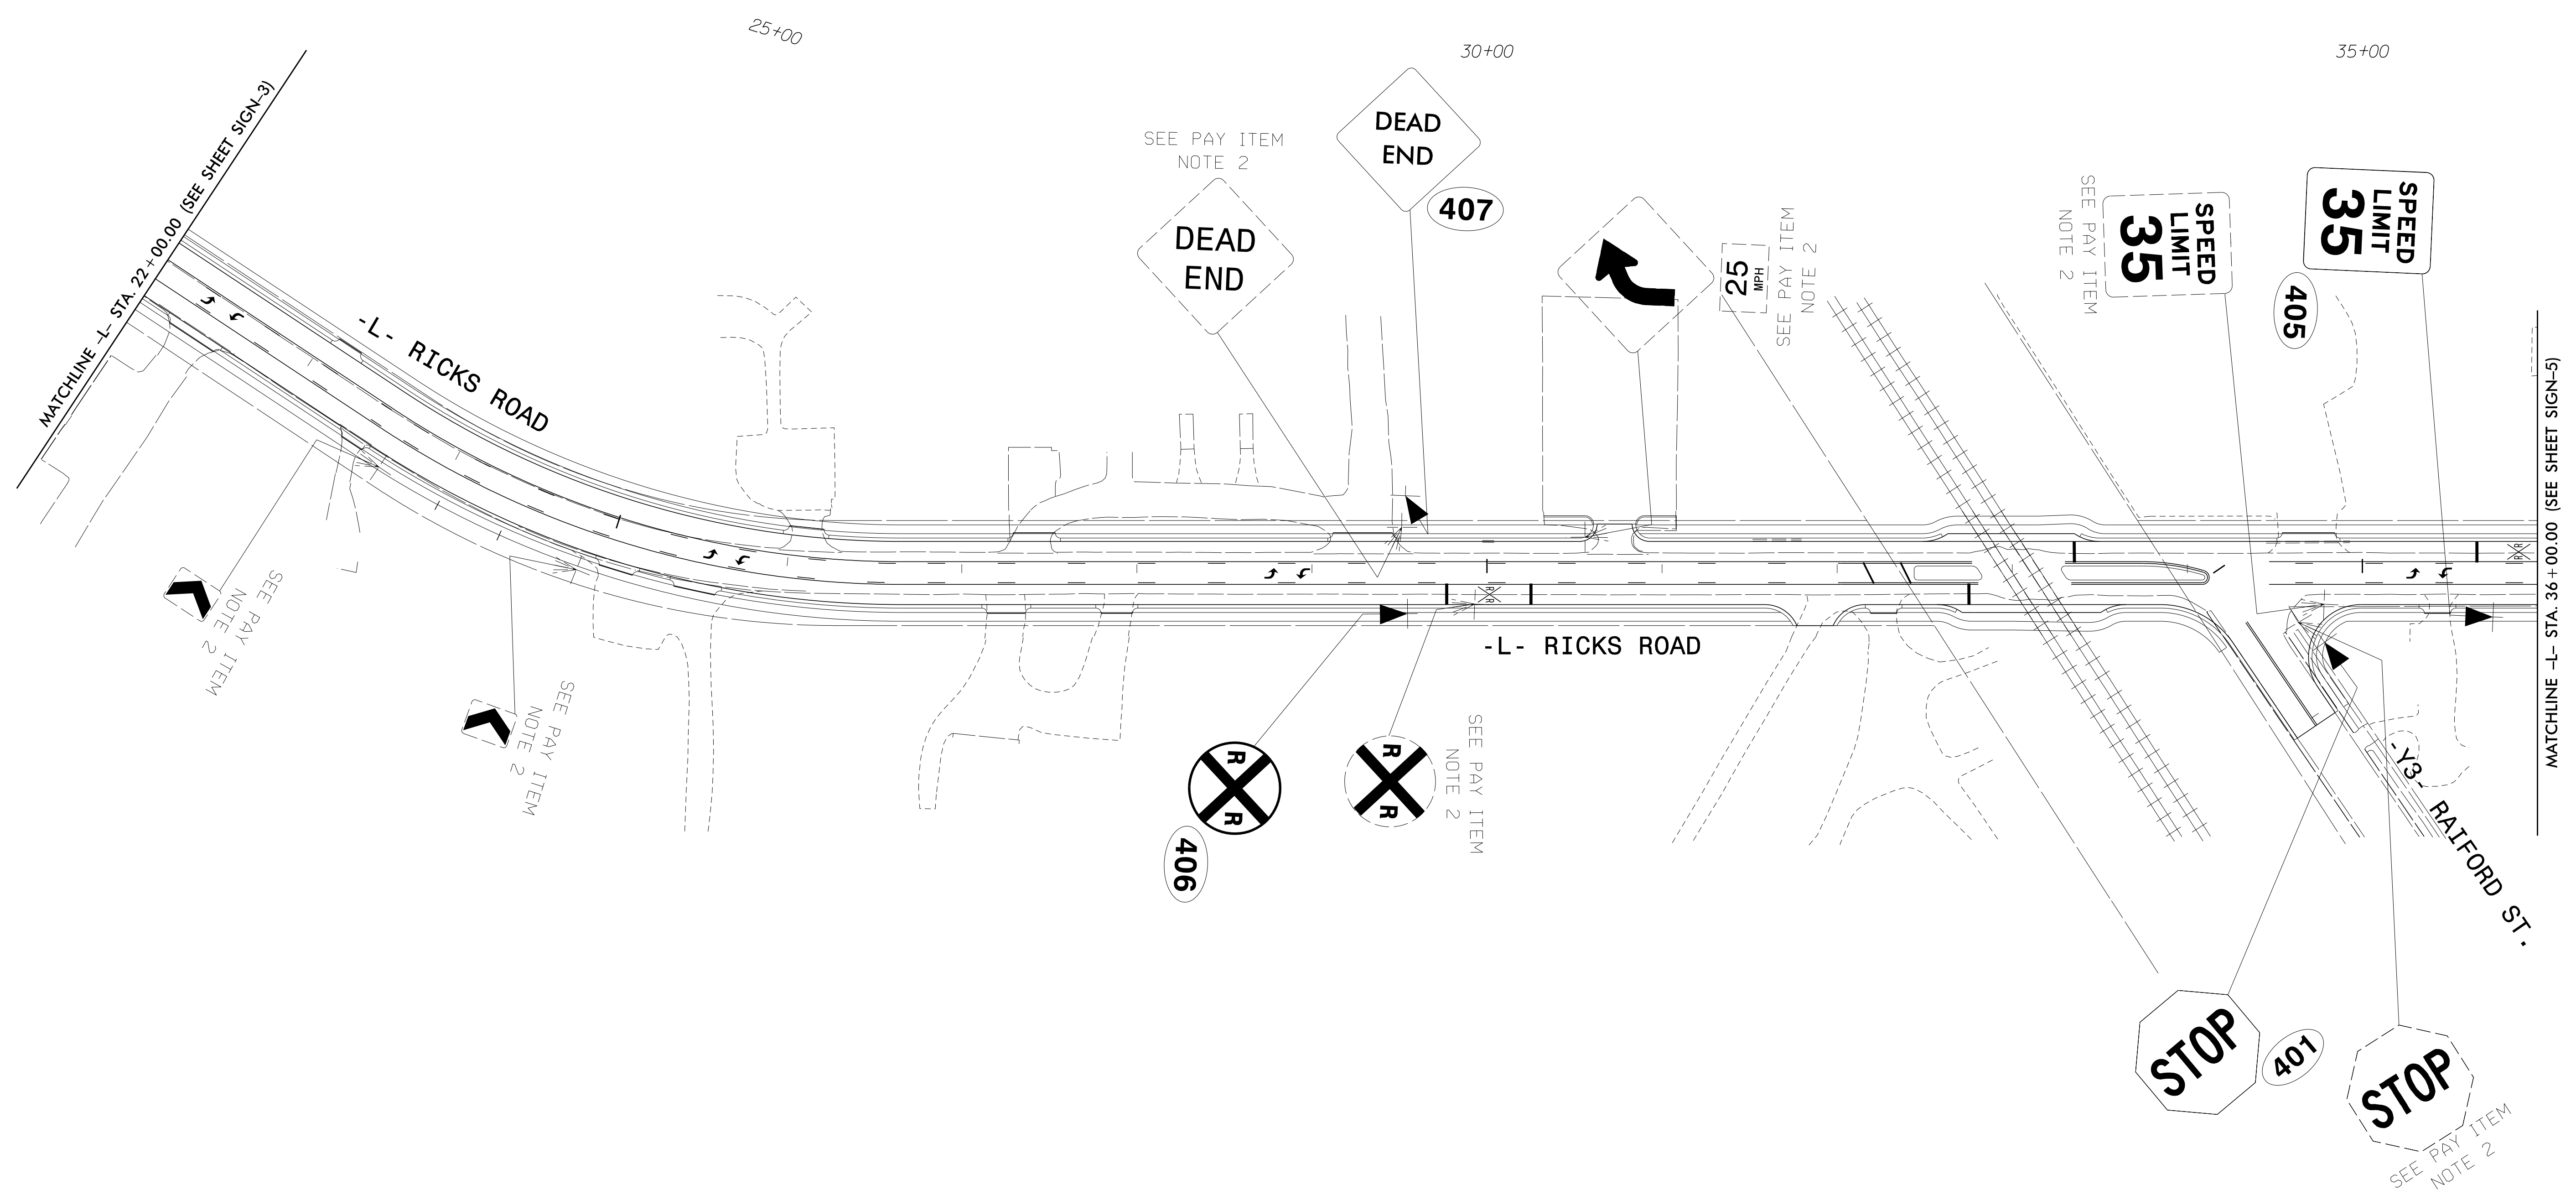

**SIGNING PLAN SHEET**

I:\10/2017\116\p\01\Nraleigh\38286.05 NCDOT U-5795 Ricks Road\NCDOT\Traffic\Signing\CADD\Signing Layout Plans\U5795\_sgn\_psh05.dgn  
 User:mtthigpen


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_

SEAL



**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

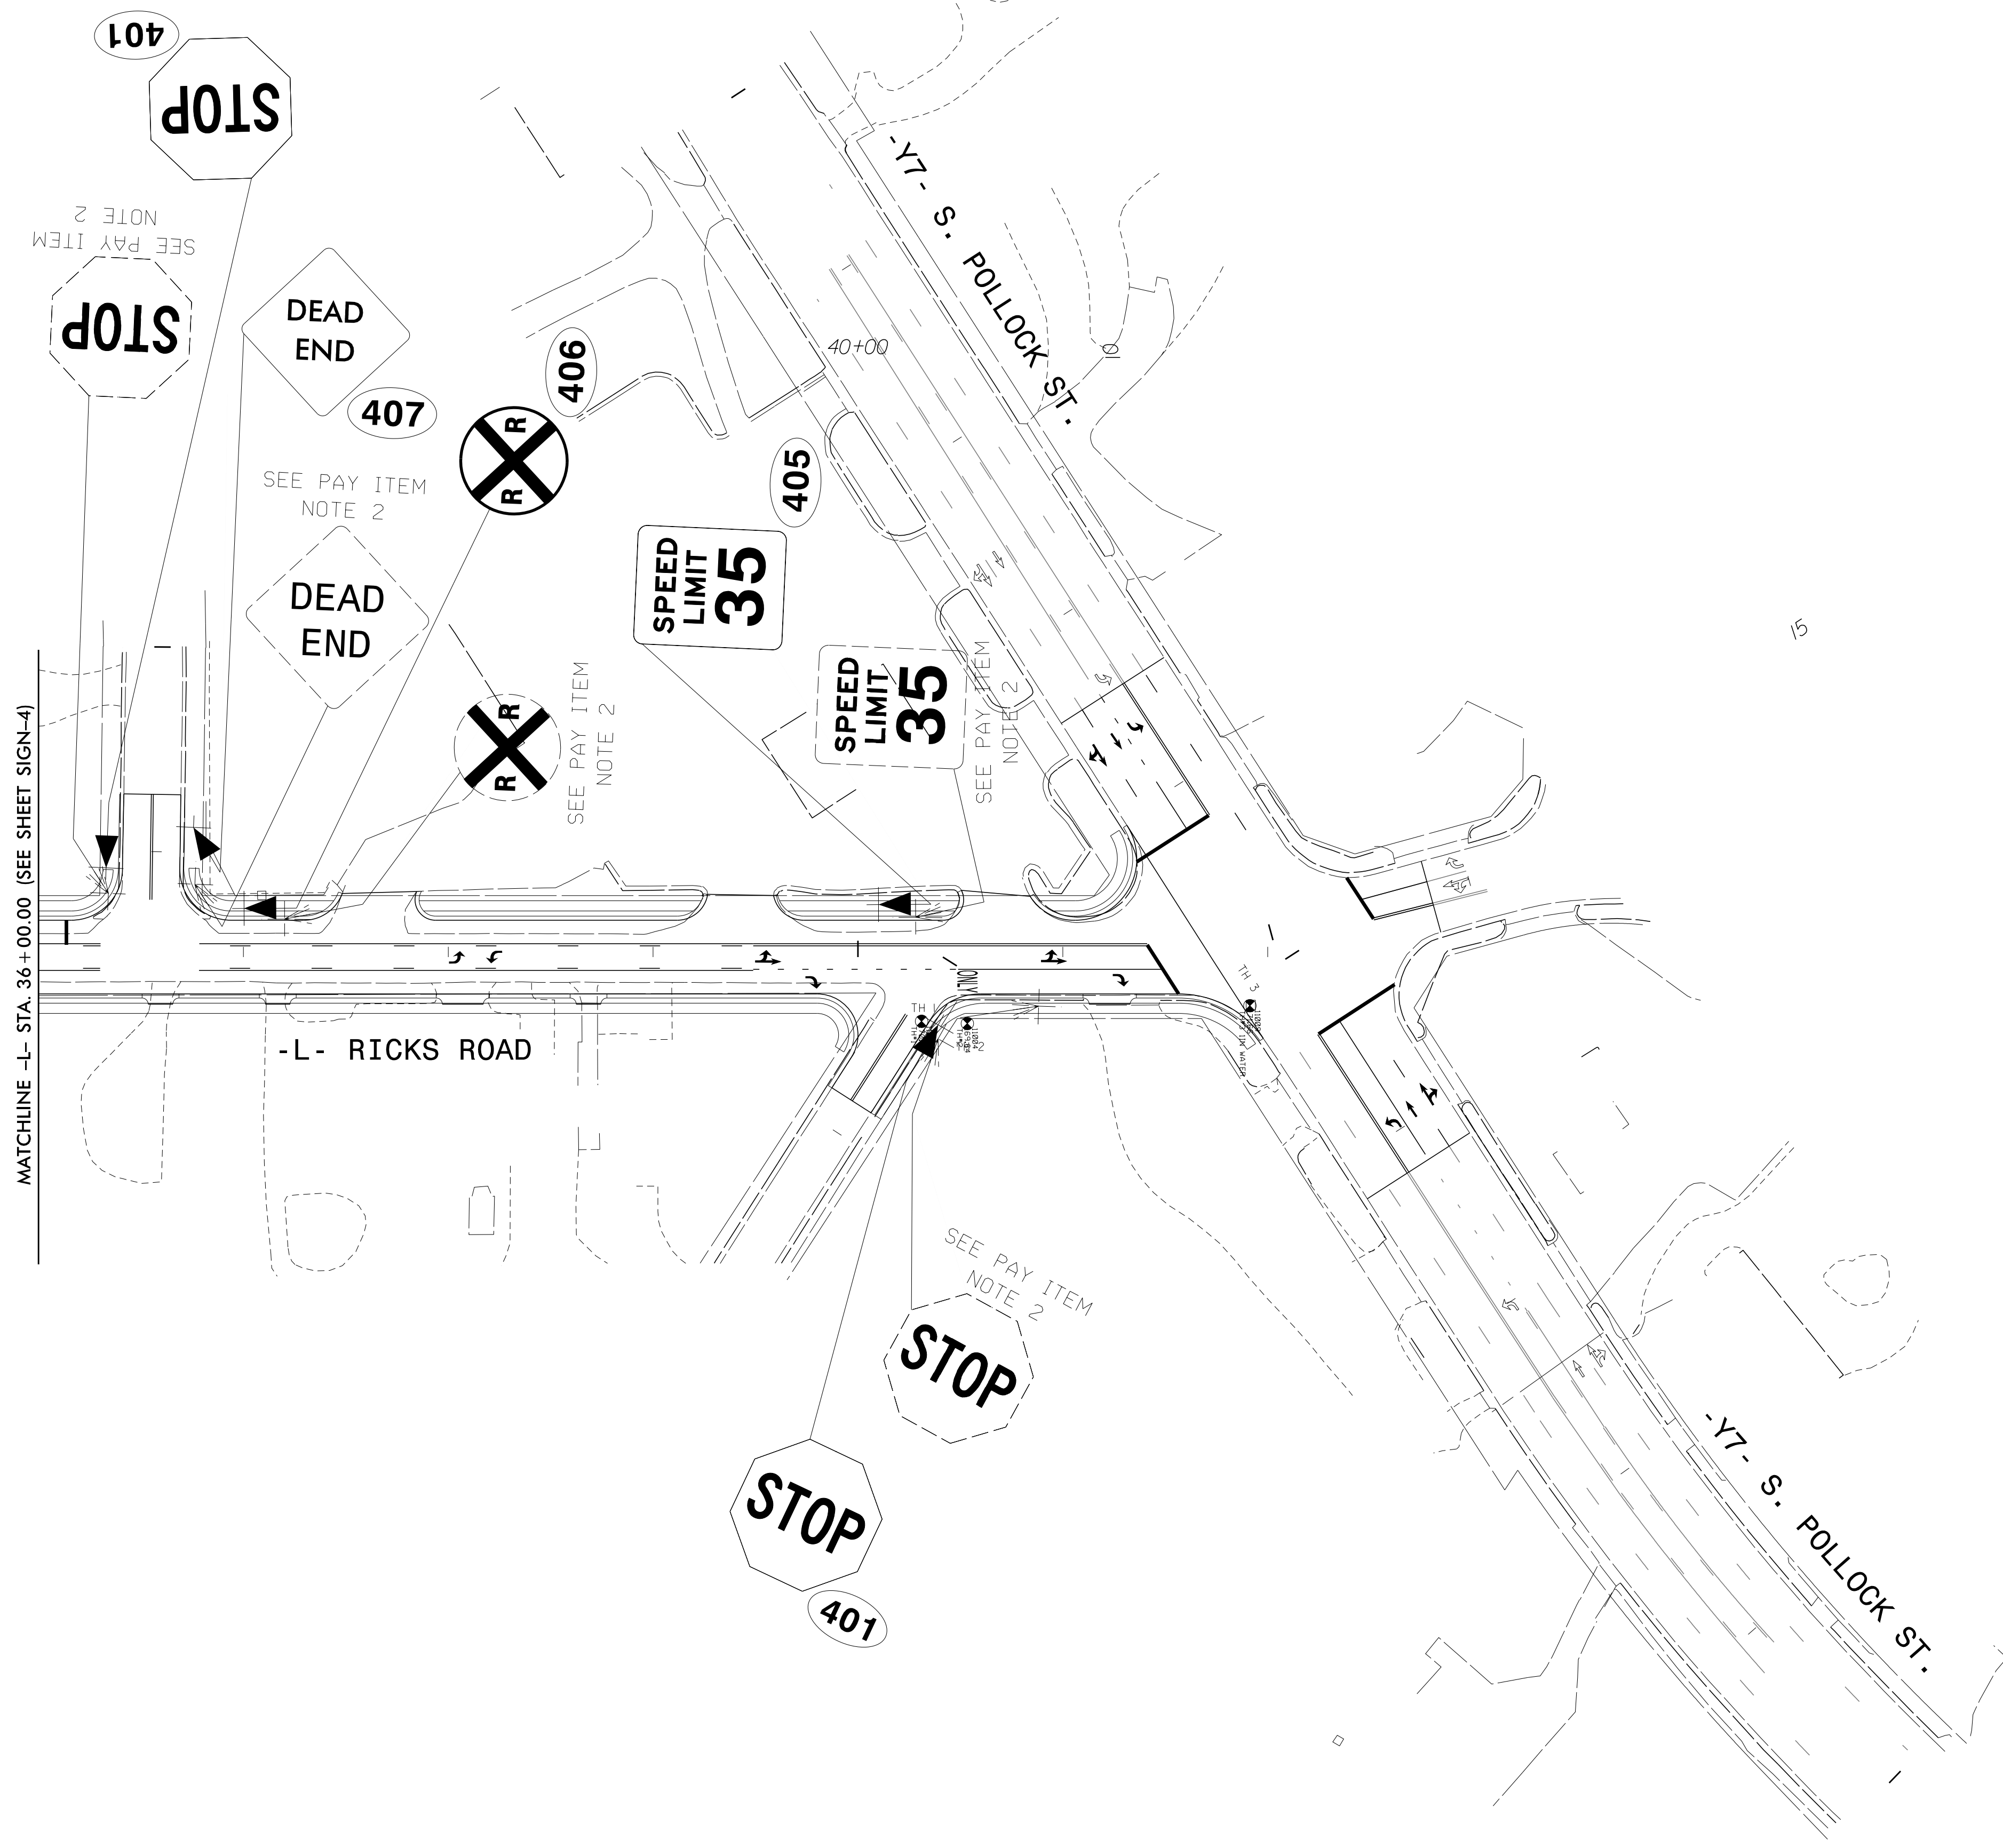

I:\10/2017  
 \vrb\p-r-o\Nraleigh\38286.05 NCDOT U-5795 Ricks Road\NCDOT\Traffic\Signing\CADD\Signing Layout\Plans\U5795\_sgn\_psh05.dgn  
 User:mtgben

**SIGNING PLAN SHEET**