



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.		7	
WBS NO. 2018CPT.00.07.0604, ETC.			

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C4	PROP. ASPHALT SURFACE TREATMENT, MATCOAT #67, AT AN AVERAGE RATE OF 25 LBS. PER SQ. YD. (STONE) AND 0.35 GALLONS PER SQ. YD. (LIQUID ASPHALT)
E1	PROP. APPROX. 5.5" ASPHALT BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T1	SHOULDER RECONSTRUCTION
V1	PROFILE MILLING 0" TO 1.5"
V2	PROFILE MILLING 0" TO 2.0"
V3	MILLING 1.5" DEPTH
V4	MILLING 2.0" DEPTH
V5	MILLING 1.0" DEPTH

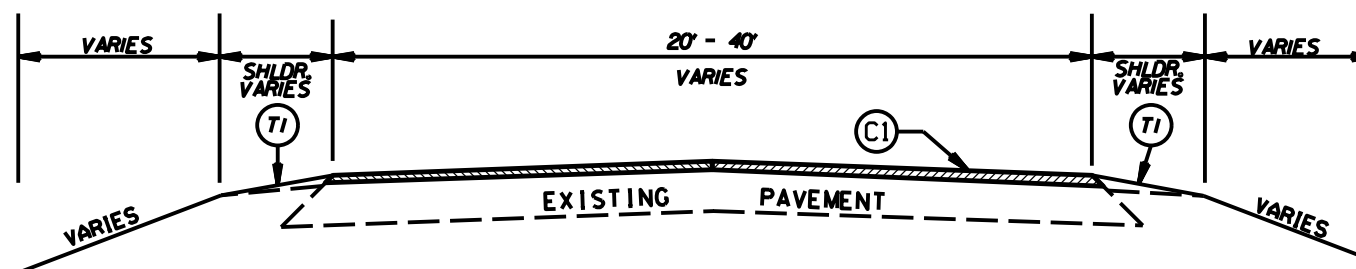


TYPICAL SECTION NO. 1

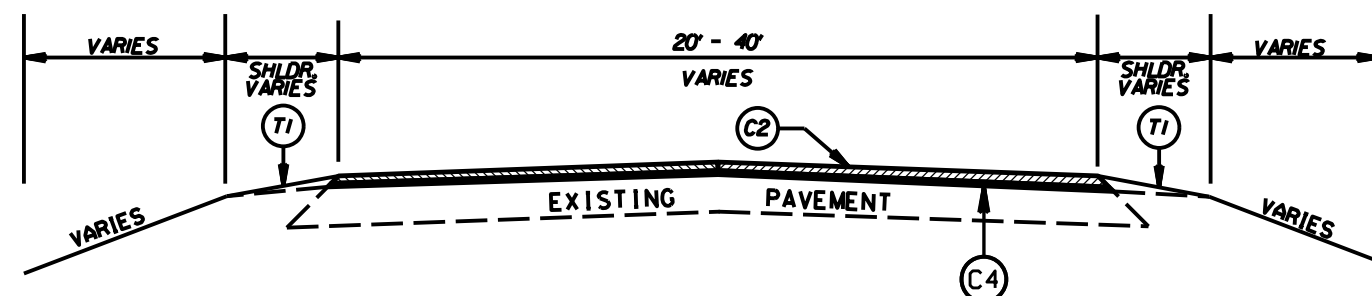

TYPICAL SECTION NO. 2

PATCHING DETAIL

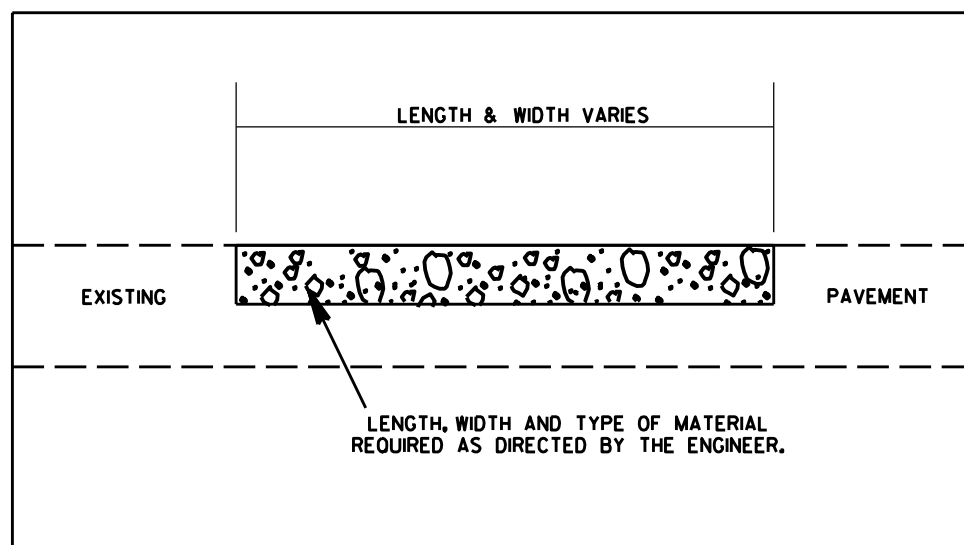

2018/2019 MECKLENBURG COUNTY
RESURFACING

SCALE	-NA-
DATE	1/18
DWG. BY	JHE
DESIGN BY	JHE
APPROVED	



REVISIONS	
2/22/18	