



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.		14	
WBS NO. 208CPT,0,07,060J, ETC.			

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C4	PROP. ASPHALT SURFACE TREATMENT, MATCOAT #67, AT AN AVERAGE RATE OF 25 LBS. PER SQ. YD. (STONE) AND 0.35 GALLONS PER SQ. YD. (LIQUID ASPHALT)
E1	PROP. APPROX. 5.5" ASPHALT BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 627 LBS. PER SQ. YD.
T1	SHOULDER RECONSTRUCTION
V1	PROFILE MILLING 0" TO 1.5"
V2	PROFILE MILLING 0" TO 2.0"
V3	MILLING 1.5" DEPTH
V4	MILLING 2.0" DEPTH
V5	MILLING 1.0" DEPTH

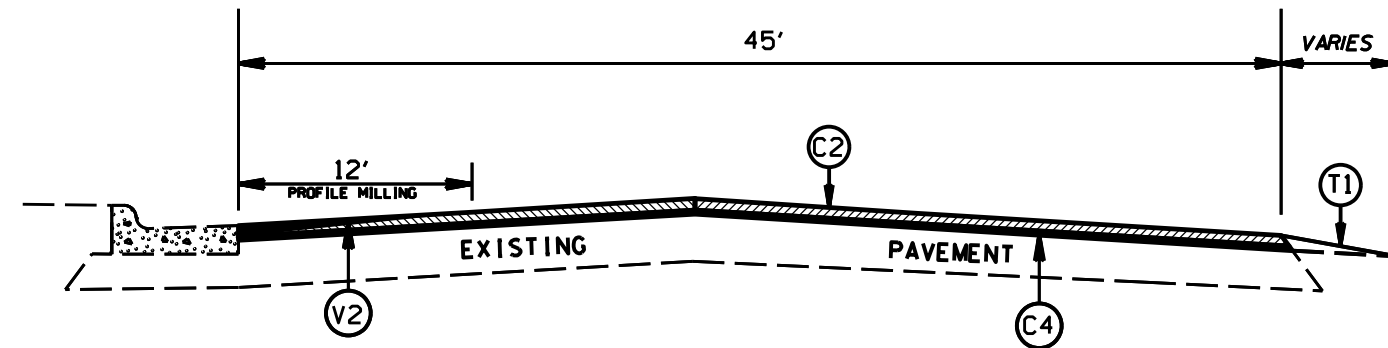

TYPICAL SECTION NO. 21

PATCHING DETAIL

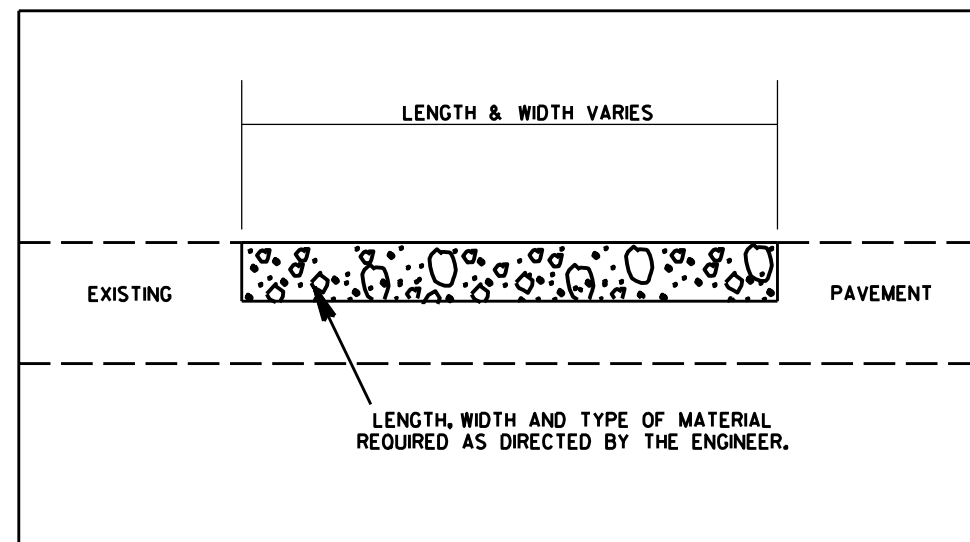

2018/2019 MECKLENBURG COUNTY
RESURFACING

SCALE	-NA-		REVISIONS	
DATE	1/18		2/22/18	
DWG. BY	JHE			
DESIGN BY	JHE			
APPROVED				