

ECONOLITE ASC/3-2070 VEHICLE DETECTOR SETUP PROGRAMMING DETAIL FOR ALTERNATE PHASING LOOPS 1A, 5A (program controller as shown)

IMPORTANT!

Program detectors per the input file connection and programming chart shown on sheet 1 before proceeding.

- From Main Menu select **8. UTILITIES**
- From UTILITIES Submenu select **1. COPY/CLEAR**
- Copy from DETECTOR PLAN "1" to DETECTOR PLAN "2".

```

COPY / CLEAR UTILITY
FROM          TO
PHASE TIMING... > PHASE TIMING...
TIMING PLAN... > TIMING PLAN...
PH DET OPT PLAN... > PH DET OPT PLAN...
DETECTOR PLAN... 1 > DETECTOR PLAN... 2
TOGGLE TO SELECT A "FROM" AND A "TO"
THEN PRESS ENTER
  
```

- From Main Menu select **6. DETECTORS**
- From DETECTOR Submenu select **2. VEHICLE DETECTOR SETUP**
- Place cursor in VEH DET PLAN [] position and enter "2".

- Place cursor in VEH DETECTOR [] position and enter "1".
 - Set delay time to "0".

```

VEH DETECTOR [ 1 ]  VEH DET PLAN [ 2 ]
TYPE: S-STANDARD
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
1 1
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY. NO
  
```

- Place cursor in VEH DETECTOR [] position and enter "26".
 - Set assigned phase to "0".

```

VEH DETECTOR [26]  VEH DET PLAN [ 2 ]
TYPE: S-STANDARD
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
26 0
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY. NO
  
```

- Place cursor in VEH DETECTOR [] position and enter "5".
 - Set delay time to "0".

```

VEH DETECTOR [ 5 ]  VEH DET PLAN [ 2 ]
TYPE: S-STANDARD
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
5 5
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY. NO
  
```

- Place cursor in VEH DETECTOR [] position and enter "22".
 - Set assigned phase to "0".

```

VEH DETECTOR [22]  VEH DET PLAN [ 2 ]
TYPE: S-STANDARD
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
22 0
EXTEND TIME... 0.0 DELAY TIME... 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY. NO
  
```

END PROGRAMMING

DATE: 03/29/2018 11:04:11 AM User: rfmancey

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0224
 DESIGNED: March 2018
 SEALED: 03-29-2018
 REVISED: N/A


Final Design
 Electrical Detail - Sheet 3 of 3



Stantec Consulting Services Inc.
 801 Jones Franklin Road-Suite 300
 Raleigh, NC 27606
 Tel. (919) 851-6866
 Fax. (919) 851-7024
 www.stantec.com
 License No. F-0672

ELECTRICAL AND PROGRAMMING
 DETAILS FOR:

Prepared in the Offices of:

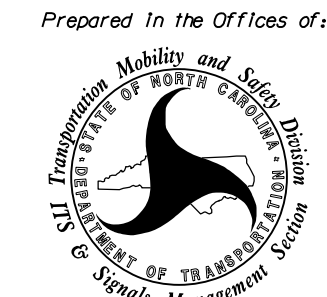

750 N. Greenfield Pkwy, Garner, NC 27529

US 401 Business (Raeford Road)
 at
 Purdue Drive/
 SteinMart Driveway


Division 6 Cumberland County Fayetteville

PLAN DATE: March 2018 REVIEWED BY: L Overn

PREPARED BY: G B Spell REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

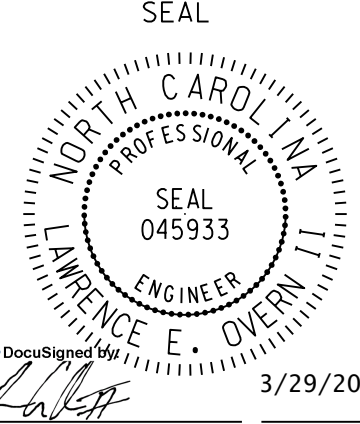

3/29/2018

SIG. INVENTORY NO. 06-0224

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED