


**UNDERGROUND SPLICE ENCLOSURE
AT NC 42 AND FLOWERS PKWY**

SIG. INV. # 04-1432

COLOR CODE TIA/EIA 598-A		LEGEND
(1) BLUE	(7) RED	
(2) ORANGE	(8) BLACK	C = CAP, COIL, AND SEAL
(3) GREEN	(9) YELLOW	
(4) BROWN	(10) VIOLET	
(5) SLATE	(11) ROSE	
(6) WHITE	(12) AQUA	

Notes:
Unused fibers left coiled and stored in splice tray.
Unused Buffer Tubes left coiled and stored in splice tray.

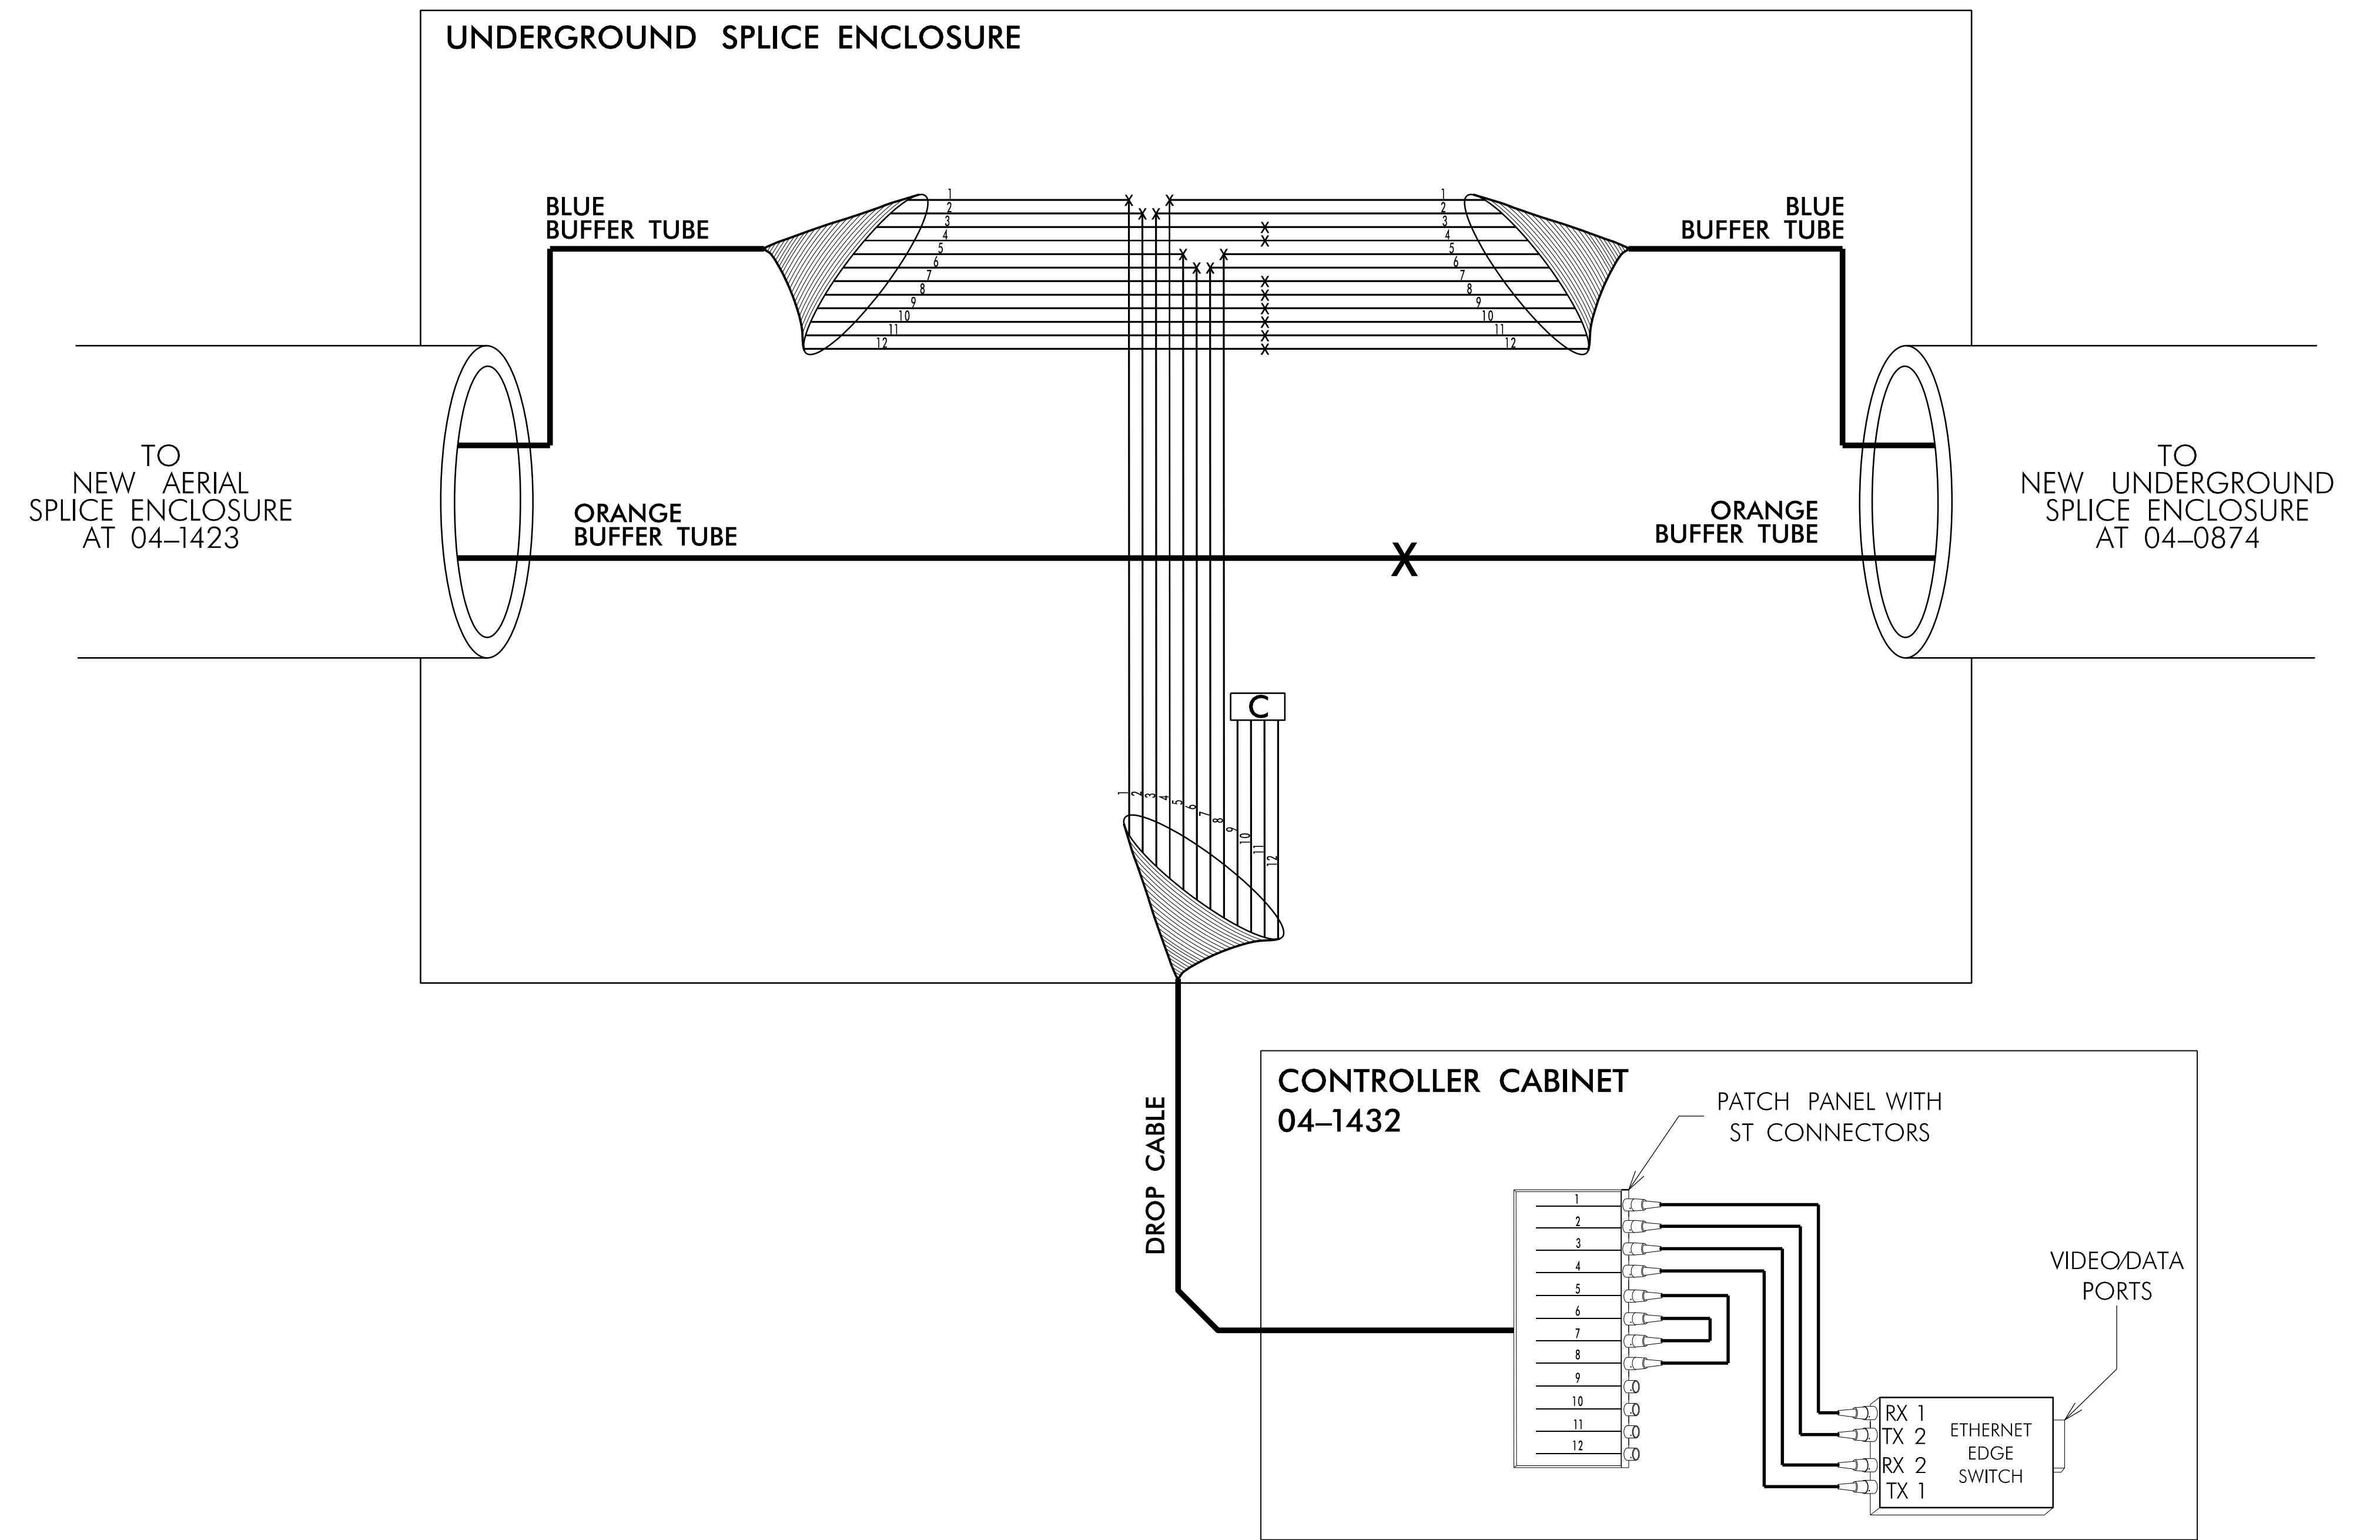

NOTES:

1. NOTIFY THE NCDOT DIVISION 4 TRAFFIC ENGINEER, ANDY BROWN, AT (252) 640-6505 EXT 3544, FIVE (5) DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE DIVISION 4 TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS OPERATIONAL.
2. TRANSCEIVER TERMINATION CONFIGURATIONS ARE GENERIC. THE CONTRACTOR IS RESPONSIBLE FOR DETERMINING /ENSURING PROPER TERMINATIONS AND SHALL PERFORM ALL SPLICING AND TERMINATIONS IN CONTROLLER CABINET.


INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING:
REFERENCE SECTION 1731 "FIBER OPTIC SPLICE ENCLOSURE"

- 1) SPLICE LOCATION
- 2) DATE
- 3) COMPANY NAME
- 4) NAME OF INDIVIDUAL PERFORMING THE SPLICING

PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPLICE TRAY AND INFORMATION SHOWN ABOVE (1-4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS.

5/25/2018 11:00:03 AM R:\Projects\3825B\Tr\off\c\45\gnal\SR\3825B SCP-25.dgn

Prepared by
URS
URS Corporation - North Carolina
1600 Perimeter Park Drive
Morrisville, North Carolina 27560
TELEPHONE (919) 461-1100 FAX (919) 461-1415
NC LICENSE # C-2243

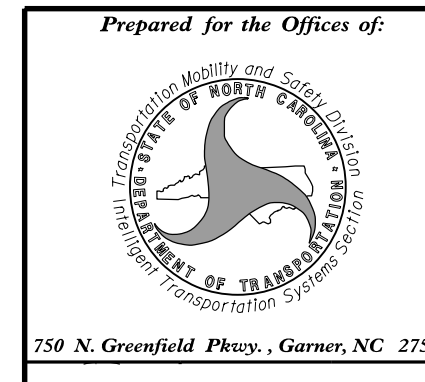

Splice Details	
Division 4 Johnston County Clayton	
PLAN DATE: January 2018	REVIEWED BY: C. L. Kalencik
PREPARED BY: S. W. Cox	REVIEWED BY:
REVISIONS	INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

NORTH CAROLINA
PROFESSIONAL
ENGINEER
STEVEN W. COX
37856

DocuSign
Steven W. Cox
5/25/2018
2AF289734140C
CADD Filename: