

AS-BUILT REPAIR QUANTITY TABLE		
TOP OF DECK REPAIRS		
	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	1080 SQ. YDS.	
CLASS II SURFACE PREPARATION	0.0 SQ. YDS.	
CONCRETE DECK REPAIR FOR PPC OVERLAY	0.0 SQ. YDS.	
SHOTBLASTING BRIDGE DECK	1080 SQ. YDS.	
PPC MATERIALS	37.5 CU. YDS.	
PLACING AND FINISHING PPC OVERLAY	1080 SQ. YDS.	
GROOVING BRIDGE FLOORS	8,869 SQ. FT.	


TOP OF DECK REPAIR QUANTITIES REPRESENT ESTIMATED VALUES OF CLASS II SURFACE PREPARATION AND CONCRETE DECK REPAIR FOR PPC OVERLAY AFTER REMOVAL OF UNSOUND CONCRETE. (MIN. 2" CLEAR TO SAWCUT). SEE OVERLAY SURFACE PREPARATION FOR POLYESTER POLYMER CONCRETE SPECIAL PROVISION.

NOTES:

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTION B-B, SEE "JOINT DETAILS" SHEET.

 APPROX. CLASS II SURFACE PREPARATION

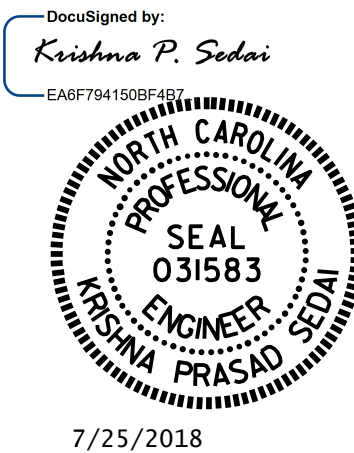

PROJECT NO. 15BPR.18  
DAVIE COUNTY  
BRIDGE NO.: 63

SHEET 2 OF 4

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

PLAN OF SPANS  
D, E & F

DRAWN BY : H.A. LOCKLEAR DATE : 3/18  
CHECKED BY : M.G. SHAIKH DATE : 5/18

DOCUMENT NOT CONSIDERED  
FINAL UNLESS ALL  
SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-5
1			3			TOTAL SHEETS 38
2			4			