

GENERAL NOTES:

- 1) CONTRACTOR TO BECOME FAMILIAR WITH THE "ICT" ASSOCIATED WITH THE FOLLOWING WORK.
- 2) NOTIFY THE CITY OF WINSTON SALEM'S SIGNAL SYSTEM OPERATIONS MANAGER, LARRY WALKER AT (336-747-6879) FIVE (5) DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE AND THE CITY "IS" SERVICES COORDINATOR, TODD PORTER AT (336-747-7006). NOTIFY THE SIGNAL SYSTEM OPERATIONS MANAGER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
- 3) PRIOR TO BEGINNING ANY WORK, CONTACTOR IS TO RECORD EXISTING SPLICE ARRANGEMENT/CONFIGURATIONS IN THE FOLLOWING LOCATIONS. (THIS INCLUDES WINSTON SALEM SIGNAL SYSTEM FIBER ONLY) :
 - EXISTING SPLICE ENCLOSURE "B"
 - EXISTING SIGNAL CABINET 09-0016
 - EXISTING SPLICE ENCLOSURE "C"
 - EXISTING SIGNAL CABINET 09-0186
 - EXISTING SPLICE ENCLOSURE "A"
 - EXISTING INTERSECTION 09-0267


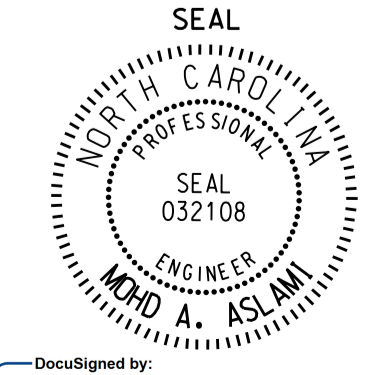
- 4) CONTACTOR IS TO INSTALL NEW 24-FIBER CABLES (ONE (1) FOR SIGNAL SYSTEM AND ONE (1) FOR CITY "IS" DEPARTMENT) STARTING NEAR 09-0016. RUN NEW CABLES ALONG GLENN AVENUE TO THE VICINITY OF 09-0186. ON AERIAL INSTALLATIONS LASH BOTH CABLES TOGETHER, HOWEVER, INSTALL CABLES IN SEPARATE RISERS. FOR ALL UNDERGROUND RUNS INSTALL CABLES IN SEPARATE CONDUITS.
- 5) ONCE ALL CABLES ARE IN PLACE FROM STEP 4 ABOVE, BEGIN THE CUTOVER AND SPLICING OF ONLY THE CITY OF WINSTON SALEM'S SIGNAL SYSTEM FIBER NETWORK.
- 6) NOTIFY THE CITY OF WINSTON SALEM'S "IS" SERVICES COORDINATOR WHEN ALL THE "IS" CABLE HAS BEEN INSTALLED AND IS READY FOR CUTOVER AND SPLICING.
- 7) UPON COMPLETION OF ALL CUTOVERS, INCLUDING THE CITY OF WINSTON SALEM'S "IS" FIBER, REMOVE BOTH 24-FIBER CABLES CROSSING OVER THE EXISTING NORFOLK SOUTHERN TRACKS. NOTIFY THE ENGINEER WHEN ALL WORK IS COMPLETE.

DELIVER THE RECORDED SPLICE ARRANGEMENT/ CONFIGURATIONS TO THE ENGINEER FOR USE IN THE FINAL PHASE. CONTRACTOR WILL USE RECORDED SPLICES ARRANGEMENT/CONFIGURATIONS MADE DURING TMP PHASE 1 FOR COMPARISON TO SPLICE PLANS PROVIDED FOR THE FINAL PHASE.

*NOTE THAT THE CONTRACTOR WILL INSTALL NEW 24-FIBER CABLE FOR THE CITY OF WINSTON SALEM "IS" DEPARTMENT; HOWEVER, THE CITY "IS" DEPARTMENT WILL BE RESPONSIBLE FOR ALL SPLICING, CUTOVERS, AND OPERATIONS OF THE CITY "IS" CABLE. DO NOT ENTER THE CITY "IS" SPLICE ENCLOSURES. PROVIDED SPLICE PLANS ARE SOLELY FOR SIGNAL SYSTEM CABLE AND ARE TO BE MADE IN SIGNAL SYSTEM SPLICE ENCLOSURES "A", "B", AND "C", AS NOTED IN THE PLANS.

TMP PHASE 1

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

 Prepared in the Offices of: 750 N. Greenfield Pkwy., Garner, NC 27529	COMMUNICATION CABLE AND CONDUIT ROUTING PLANS		 SEAL 032108 ENGINEER M. A. ASLAM
	DIVISION 9 FORSYTH WINSTON SALEM PLAN DATE: DECEMBER 2017 REVIEWED BY: <i>I. N. Berry</i> PREPARED BY: H. T. BERGGREN, EI		
SCALE 0 N/A	REVISIONS	INIT.	DATE 1/2/2018 DATE