

NOTES

INFORMATION INDICATED AS EXISTING SHALL BE CONSIDERED GENERAL INFORMATION ONLY. CONTRACTOR SHALL CONFIRM, THROUGH OTHER SOURCES, SPECIFIC INFORMATION REGARDING THE BRIDGES, ROADWAYS, UTILITIES, THE SURROUNDING AREA, AND ANY OTHER ASPECTS THAT MAY BE NECESSARY TO PERFORM AND COMPLETE THE PROJECT.

EXISTING DIMENSIONS AND BRIDGE CONDITION ARE FROM BEST INFORMATION AVAILABLE. THE CONTRACTOR SHALL FIELD VERIFY THE INFORMATION SHOWN ON THE PLANS AND NOTIFY THE ENGINEER IF ACTUAL DIMENSIONS AND CONDITIONS DIFFER.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO FOLLOW ALL STATE AND FEDERAL SAFETY REQUIREMENTS.

FOR CONTROL OF TRAFFIC AND LIMITS ON PHASING OF CONSTRUCTION, SEE TRANSPORTATION MANAGEMENT PLAN.

FOR SUBMITTAL OF WORKING DRAWINGS, SEE SPECIAL PROVISIONS.

EXISTING JOINTS AND DECK DRAINS SHALL BE SEALED PRIOR TO BEGINNING SURFACE PREPARATION OF BRIDGE DECK.

FOR FALSEWORK AND FORMWORK, SEE SPECIAL PROVISIONS.

FOR CRANE SAFETY, SEE SPECIAL PROVISIONS.

FOR FOAM JOINT SEALS, SEE SPECIAL PROVISIONS.

FOR VOLUMETRIC MIXER, SEE SPECIAL PROVISIONS.

FOR SILANE DECK TREATMENT, SEE SPECIAL PROVISIONS.

FOR EXPANSION JOINT SEAL REPAIR, SEE SPECIAL PROVISIONS.

FOR BRIDGE JOINT DEMOLITION, SEE SPECIAL PROVISIONS.

FOR ELASTOMERIC CONCRETE, SEE SPECIAL PROVISIONS.

FOR CONCRETE DECK REPAIR, SEE SPECIAL PROVISIONS.

FOR SHOTBLASTING BRIDGE DECK, SEE SILANE DECK TREATMENT SPECIAL PROVISION.


FOR GROUT FOR STRUCTURES, SEE SPECIAL PROVISIONS.

PRIOR TO BEGINNING WORK, CONTRACTOR SHALL SUBMIT FOR REVIEW AND APPROVAL A COMPLETE SEQUENCE OF TASK FOR EACH OPERATION AFFECTING THE BRIDGE SURFACE AND/OR TRAFFIC.

TOTAL BILL OF MATERIALS

BRIDGE NO.	FOAM JOINT SEALS	VOLUMETRIC MIXER	EXPANSION JOINT SEAL REPAIR	BRIDGE JOINT DEMOLITION	CONCRETE DECK REPAIR	SHOTBLASTING BRIDGE DECK	SILANE DECK TREATMENT
	LUMP SUM	LUMP SUM	LIN. FT.	SO. FT.	CU. FT.	SO. YD.	SO. YD.
820	LUMP SUM	LUMP SUM	-	129	* 10	1,230	1,230
821	LUMP SUM	LUMP SUM	97	65	* 10	3,285	3,285
823	-	LUMP SUM	-	-	* 10	3,590	3,590
824	LUMP SUM	LUMP SUM	-	55	* 10	1,850	1,850
825	LUMP SUM	LUMP SUM	-	97	* 10	1,015	1,015
827	-	LUMP SUM	38	-	* 10	2,700	2,700
861	LUMP SUM	LUMP SUM	-	170	* 10	2,410	2,410
862	LUMP SUM	LUMP SUM	-	170	* 10	2,195	2,195
864	LUMP SUM	LUMP SUM	-	140	* 10	2,080	2,080
865	LUMP SUM	LUMP SUM	-	140	* 10	2,080	2,080
866	LUMP SUM	LUMP SUM	-	152	* 10	1,780	1,780
867	LUMP SUM	LUMP SUM	-	153	* 10	1,800	1,800
869	LUMP SUM	LUMP SUM	-	129	* 10	1,195	1,195
870	LUMP SUM	LUMP SUM	-	129	* 10	1,195	1,195
871	LUMP SUM	LUMP SUM	-	129	* 10	1,170	1,170
872	LUMP SUM	LUMP SUM	-	129	* 10	1,170	1,170
879	LUMP SUM	LUMP SUM	-	74	* 10	1,290	1,290
TOTAL	LUMP SUM	LUMP SUM	135	1861	* 170	32,035	32,035

PROJECT NO. I-5852A
GUILFORD COUNTY
 BRIDGE NO. _____

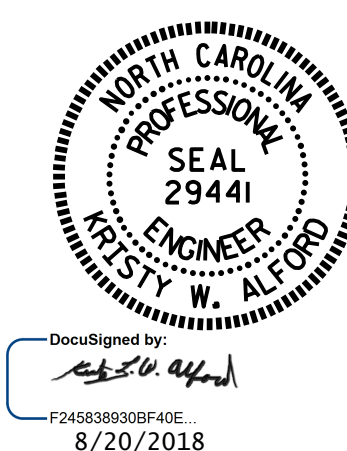

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

TOTAL BILL OF MATERIALS

DRAWN BY : M.K. BEARD DATE : 7/3/18
 CHECKED BY : K.W. ALFORD DATE : 7/13/18

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-1
1			3			TOTAL SHEETS
2			4			1