


SCOPE OF WORK

1. REMOVE UNSOUND CONCRETE AND PREPARE FOR SHOTCRETE AND/OR CONCRETE REPAIR AREAS.
2. PERFORM SHOTCRETE AND/OR CONCRETE REPAIRS IN PREPARED AREAS.
3. PERFORM EPOXY RESIN INJECTION OF DESIGNATED CONCRETE CRACKS.

NOTES

1. CULVERT INFORMATION IS TAKEN FROM THE ORIGINAL PLANS AND THE ROUTINE INSPECTION REPORT DATED JUNE 05, 2017. THE CULVERT ORIENTATION CONFORMS TO THE BRIDGE INSPECTION REPORT.

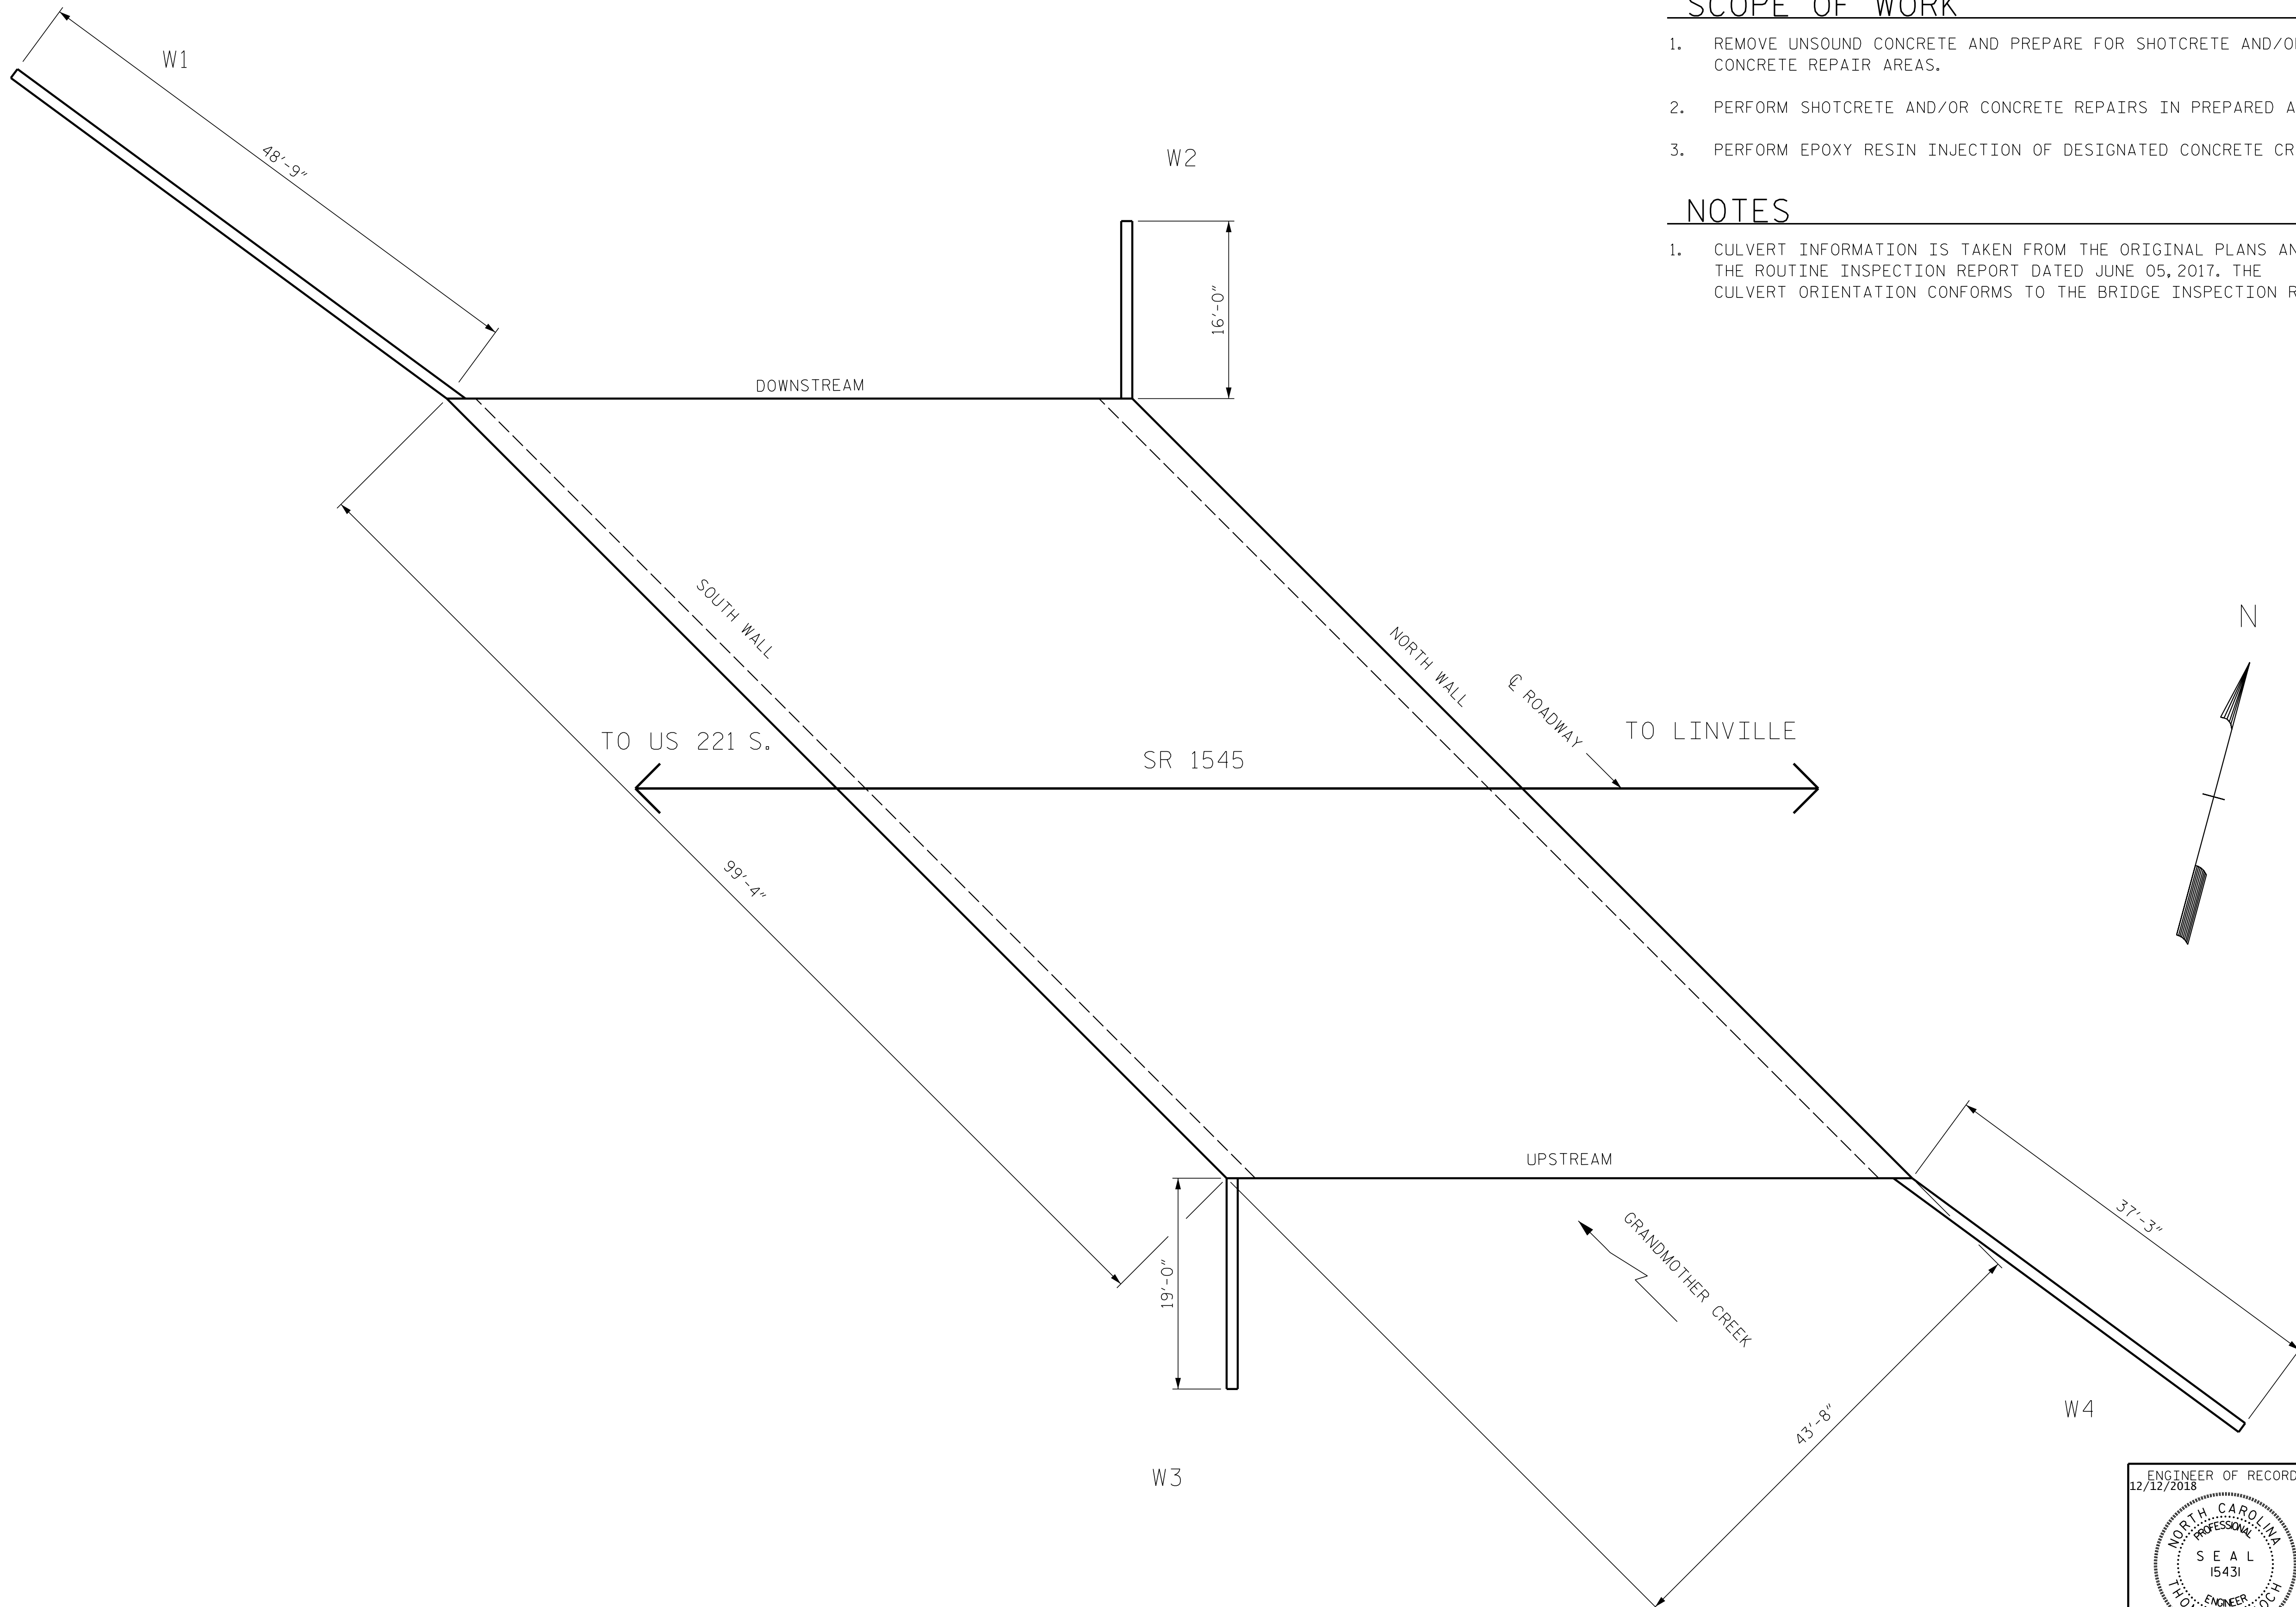


I HEREBY CERTIFY THAT THIS STRUCTURE WAS REHABILITATED ACCORDING TO THESE PLANS OR AS NOTED HEREIN

RESIDENT ENGINEER _____ DATE _____

PROJECT NO. 15BPR.32
AVERY COUNTY
 STRUCTURE: 050031

SHEET 1 OF 8

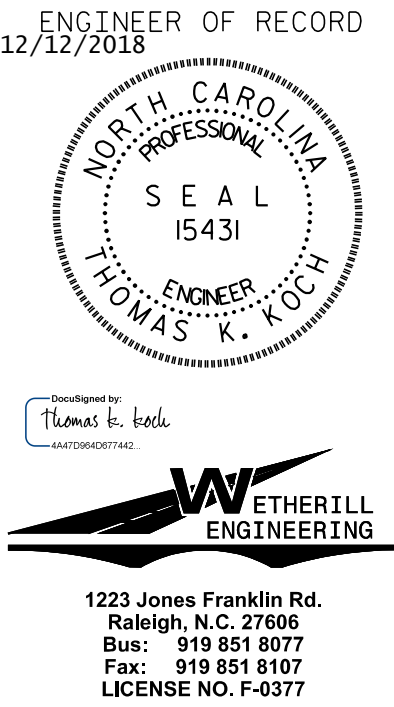

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
 GENERAL DRAWING
 28' x 14' REINFORCED
 CONCRETE ARCH CULVERT
 ON SR 1545 (LINVILLE AVE)
 OVER GRANDMOTHER CREEK

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-8
1			3			TOTAL SHEETS
2			4			23

PLAN

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

P:\2018\18153.22_15BPR.32_MCDOT_Culvert_Preservation\DWG\AVERY_050031\Avery_31_CULVERT_PLAN.dgn
 12/12/2018 2:03:22 PM

DRAWN BY : A. KLINK DATE : 07/18
 CHECKED BY : T. KOCH DATE : 08/18