



PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
IREDELL COUNTY	10	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION
2019CPT. 12.04.10491		PRIMARY RESURFACING
2019CPT. 12.04.20491		SECONDARY RESURFACING

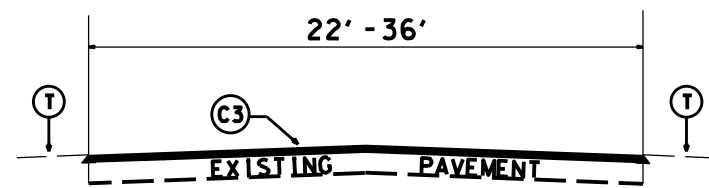


TYPICAL SECTION NO.1

Map 1: ALL
 Map 3: 0+00-1+00
 6+00-41+00
 57+00-77+00
 83+50-163+00
 263+00-284+1.5
 292+1.5-376+00
 385+65-388+08

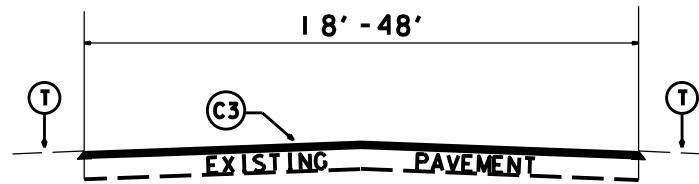


TYPICAL SECTION NO.5

Map 4, 38, 52: ALL
 Map 8: 0+00-34+00
 47+00-59+00
 Map 9: 0+00-23+00
 28+00-38+86
 Map 33: 7+00-187+00

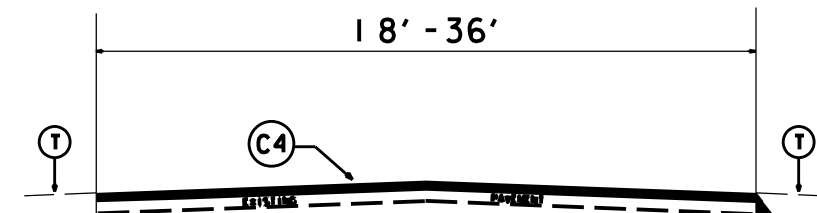


TYPICAL SECTION NO.10

Map 34: 0+00-202+86
 Map 37: ALL

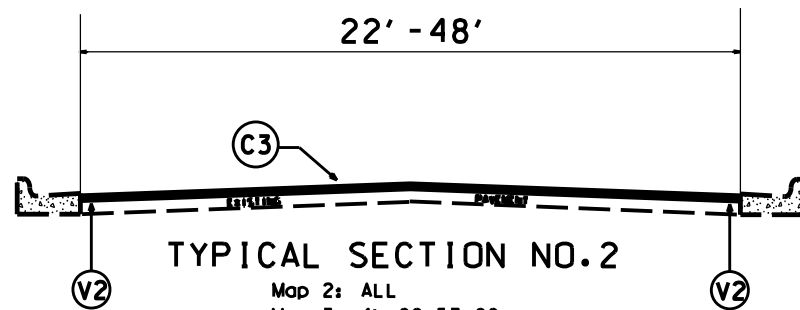


TYPICAL SECTION NO.2

Map 2: ALL
 Map 3: 41+00-57+00
 163+00-219+65
 Map 8: 34+00-47+00
 59+00-68+11
 Map 33: 0+00-7+00
 187+00-194+00

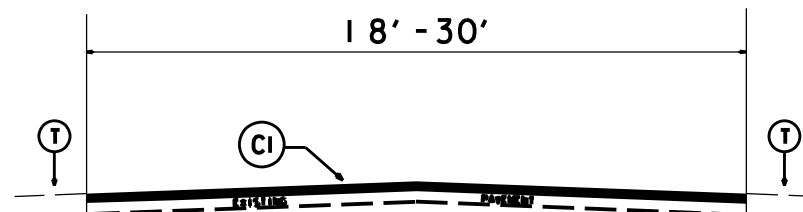


TYPICAL SECTION NO.6

Maps 5, 7, 10, 14, 19, 20, 21, 35,
 36, 39, 41, 42, 42, 44, 45,
 46, 57, 58: ALL

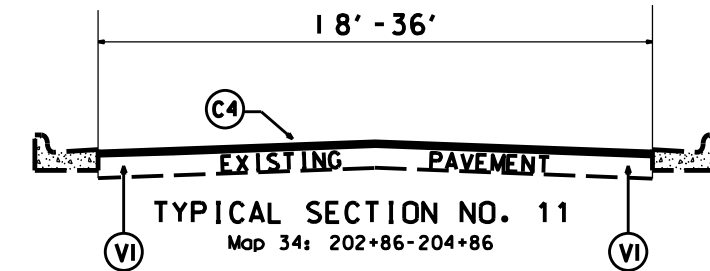


TYPICAL SECTION NO. 11

Map 34: 202+86-204+86

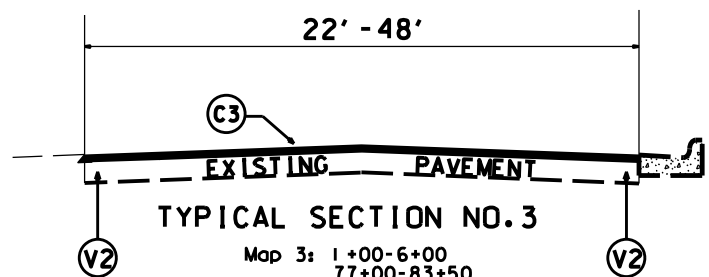


TYPICAL SECTION NO.3

Map 3: 1+00-6+00
 77+00-83+50

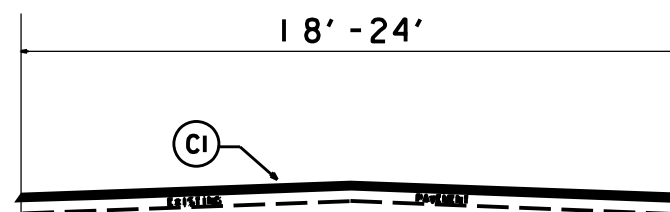


TYPICAL SECTION NO.7

Maps 6, 22, 23, 24, 25, 26, 27, 28,
 29, 31, 40, 53, 54, 55, 56: ALL

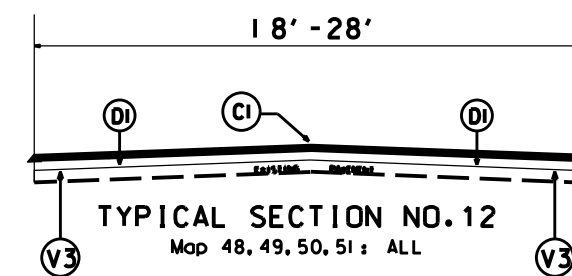


TYPICAL SECTION NO.12

Map 48, 49, 50, 51: ALL

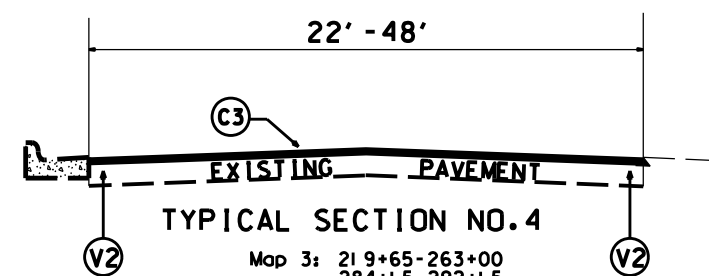


TYPICAL SECTION NO.4

Map 3: 219+65-263+00
 284+1.5-292+1.5
 376+00-385+65
 Map 9: 23+00-28+00

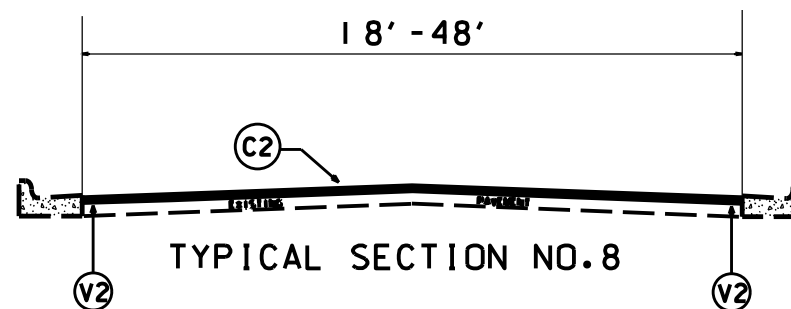

TYPICAL SECTION NO.8

Maps 11, 12, 13, 15, 16, 17, 18, 30: ALL

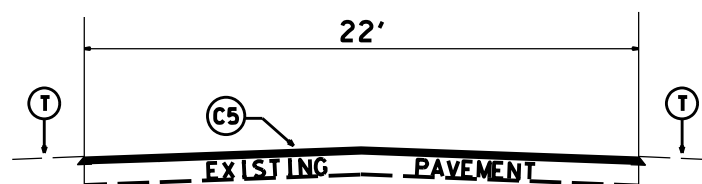

TYPICAL SECTION NO.9

Map 32: ALL

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.0" WARM MIX ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C5	PROP. APPROX. 1.5" WARM MIX ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 3.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
V1	MILL EXISTING ASPHALT PAVEMENT APPROX. 1" IN DEPTH
V2	MILL EXISTING ASPHALT PAVEMENT APPROX. 1.5" IN DEPTH
V3	MILL EXISTING ASPHALT PAVEMENT APPROX. 4" IN DEPTH

2019 - 2020
 Resurfacing Program
 Typical Sections
 Iredell County