WBS ELEMENT	SHEET NO.
2019CPT.08.05.10531 2019CPT.08.05.20531	8

JOINT REPAIR

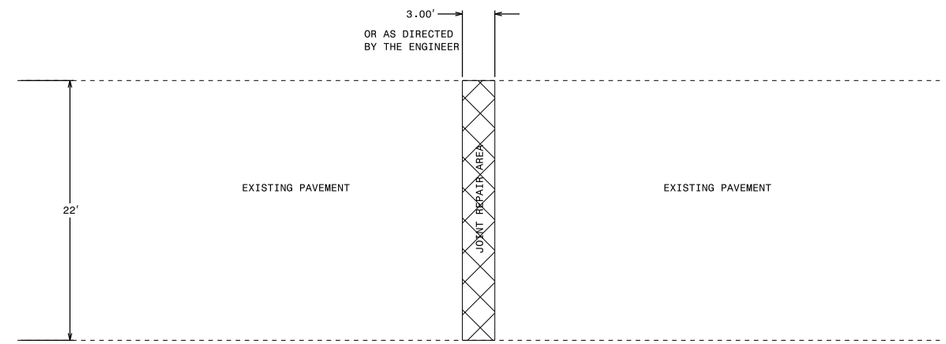

CONTRACTOR SHALL COORDINATE WITH RESIDENT ENGINEER'S OFFICE FOR LOCATION OF JOINTS TO BE REPAIRED.

CROSS–SECTION

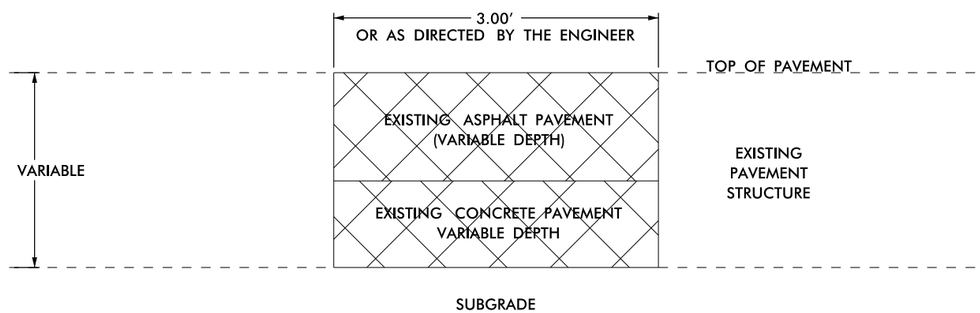

NOTE:
REMOVE ASPHALT AND CONCRETE AT JOINT LOCATIONS AS DIRECTED BY THE ENGINEER (BY SAWING CLEAN JOINTS).
REMOVE A TOTAL WIDTH OF 3' (APPROX. 1.5' EACH SIDE OF JOINT).
REMOVE AND REPLACE WITH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C.
THERE WILL BE NO DIRECT PAY FOR THIS WORK AS IT WILL BE CONSIDERED INCIDENTAL TO TO THE LINE ITEM, JOINT REPAIR (TONNAGE)

18-DEC-2018 13:05
ACING\January_2019\Lee\Lee_February_2019_Submittal\Lee_County_Maps_Typ.dgn
axis AT BTWB-3926711