\frown 00 V • •

PROJECT NOTES

- 1. DISPOSAL OF SIGN SYSTEM, WOOD
- 2. RELOCATED BY OTHERS
- 3. MAINTAINED BY OTHERS

SUMMARY OF QUANTITIES

| 4082000000 | 903 | SUPPORTS, WOOD | 1888 | L.F. |
|------------|-----|--|------|------|
| 4096000000 | 904 | SIGN ERECTION, TYPE D | 5 | EA. |
| 4102000000 | 904 | SIGN ERECTION, TYPE E | 37 | EA. |
| 4108000000 | 904 | SIGN ERECTION, TYPE F | 17 | EA. |
| 4110000000 | 904 | SIGN ERECTION, TYPE B (GROUND MOUNTED) | 1 | EA. |
| 4158000000 | 907 | DISPOSAL OF SIGN SYSTEM, WOOD | 48 | EA. |
| 4238000000 | 907 | DISPOSAL OF SIGN, D, E OR F | 9 | EA. |

| PLOT DRIVER: \$PLTDRVS\$ | | PENTABLE: \$PENTBLS\$ | |
|------------------------------|----------------|-----------------------|--|
| USER: \$USER\$ | DATE: \$DATE\$ | TIME: \$TIME\$ | |
| FILE: \$PWVARVAULTPATHDESC\$ | | | |
| | | REVISIONS | |


ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -CONTRACT STANDARDS AND DEVELOPMENT UNIT - N.C. DEPARTMENT OF TRANSPORTATION RALEIGH, N.C., DATED JANUARY 2018 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

| <u>STD. NO</u> . | TITLE |
|------------------|----------------------|
| 901.20 | TYPE 'B' SIGNS |
| 901.50 | ARROWS AND SHIELDS |
| 901.70 | SIGN STRINGERS AND |
| 901.80 | SIGN MOUNTING DETAI |
| 903.10 | GROUND MOUNTED SIGN |
| 903.20 | WOOD SIGN POST |
| 904.10 | ORIENTATION OF GROU |
| 904.50 | MOUNTING OF TYPE 'D' |
| 910.50 | SIGNING FOR SPEED R |
| | |

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR
- REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

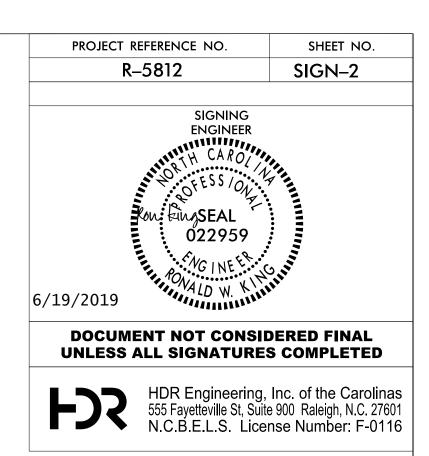

SUPPORT SPACING AILS FOR TYPE A AND TYPE B SIGNS N SUPPORTS

UND MOUNTED SIGNS D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS REDUCTION ZONE

. ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS. . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER . ALL EXISTING SIGNS ON "WOOD" POSTS WITHIN THE PROJECT LIMITS SHALL BE . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE GRADE C REFLECTIVE SHEETING.

Notes, Rdwy Std Dwg & Quantities

| NTS | |
|-----------------------------|--|
| \$DATE\$ | |
| DWG. BY: R DRAYTON | |
| design by: R DRAYTON | |
| reviewed by: R KING | |



| REVISIONS | | | |
|--------------|--|--|--|
| | | | |
| | | | |
| | | | |
| CADD FILE | | | |
| | | | |