PROJECT REFERENCE NO.	SHEET NO.
R-2530B	Sig. 5.1

EDI MODEL 2018ECLip-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

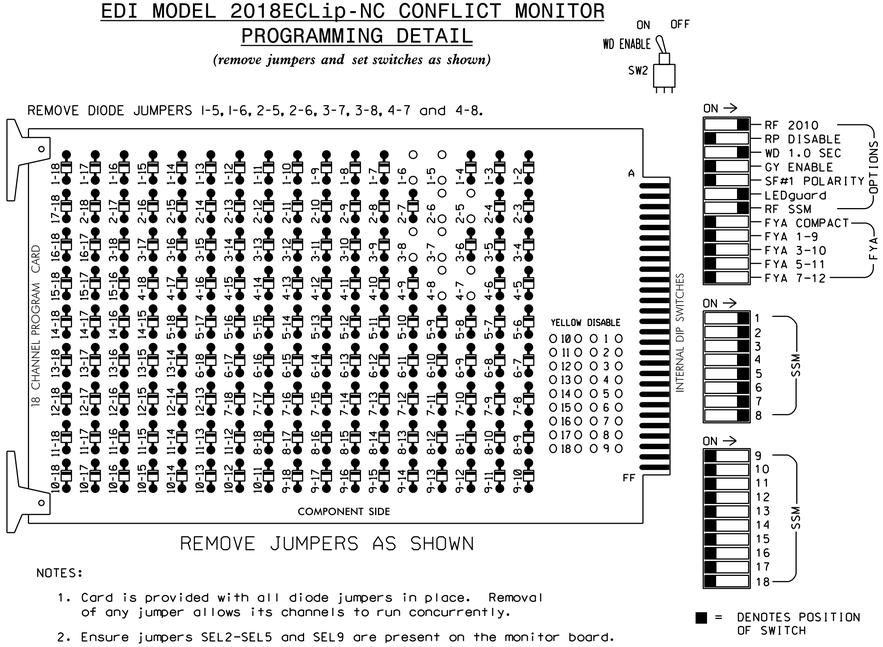

REMOVE JUMPERS AS SHOWN

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that Red Enable is active at all times during normal operation.
4. Integrate monitor with Ethernet network in cabinet.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
2. Enable Simultaneous Gap-Out for all phases.
3. Program phases 2 and 6 for Gap Reduction.
4. Program phases 2 and 6 for Start Up In Green.
5. Program phases 2 and 6 for Yellow Flash.
6. The cabinet and controller are part of the NC 24-27-73 (Bypass East) Closed Loop System.

EQUIPMENT INFORMATION

CONTROLLER.....2070
CABINET.....332 W/ AUX
SOFTWARE.....ECONOLITE OASIS
CABINET MOUNT.....BASE
OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
LOAD SWITCHES USED.....S1,S2,S4,S5,S7,S8,S10,S11
PHASES USED.....1,2,3,4,5,6,7,8
OVERLAP "A".....NOT USED
OVERLAP "B".....NOT USED
OVERLAP "C".....NOT USED
OVERLAP "D".....NOT USED

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1		S2	S3	S4		S5	S6	S7		S8	S9	S10		S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1		2	13	3		4	14	5		6	15	7		8	16	9	10	17	11	12	18
PHASE	1		2	2 PED	3		4	4 PED	5		6	6 PED	7		8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	82	21,22	NU	22	31	41, 42,43	NU	42	51	61,62	NU	62	71	81,82	NU	NU	NU	NU	NU	NU	NU
RED			128				101				134				107							
YELLOW			129				102				135				108							
GREEN			130				103				136				109							
RED ARROW	125					116				131				122								
YELLOW ARROW	126	126			117	117			132	132			123	123								
GREEN ARROW	127	127			118	118			133	133			124	124								

NU = Not Used

INPUT FILE POSITION LAYOUT

(front view)

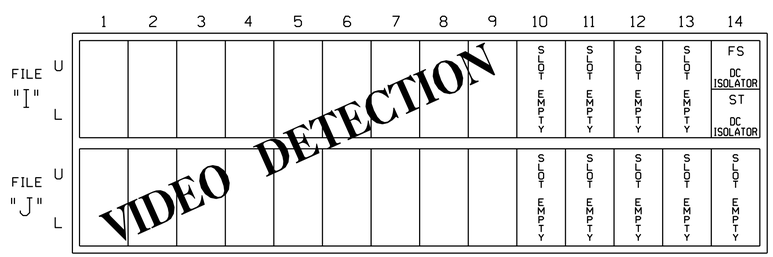

EX.: 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
ST = STOP TIME

SPECIAL DETECTOR NOTE

Install a video detection system for vehicle detection. Perform installation according to manufacturer's directions and NCDOT engineer-approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 10-0591 T4
DESIGNED: October 2018
SEALED: 11/2/2018
REVISED:

Electrical Detail - Temp 4

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING DETAILS FOR:

NC 24-27-73 (Bypass East)
at
NC 740 Bypass/
SR 1625 (East main St.)

Division 10 Stanly County Albemarle

PLAN DATE: October 2018 REVIEWED BY: T. Joyce
PREPARED BY: C. Strickland REVIEWED BY:

REVISIONS	INIT.	DATE

Prepared in the Offices of:
Transportation Mobility and Safety Division
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
ITS & Signals Management Section
750 N.Greenfield Pkwy,Garner,NC 27529

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 031001 ENGINEER D. TODD JOYCE

DocuSigned by: D. Todd Joyce 11/5/2018
A9CCADEFBD42410... DATE

SIG. INVENTORY NO. 10-0591 T4

05-NOV-2018 09:51
S:\TSG\ITS\Signals\Workgroups\Sig Mgmt\Strickland\100591_sm_ele_xxx.dgn
cestrickland