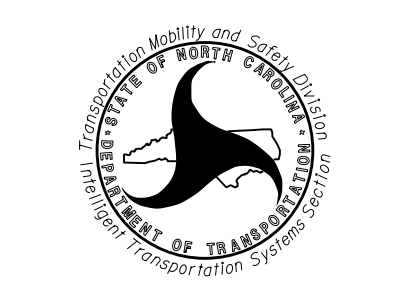
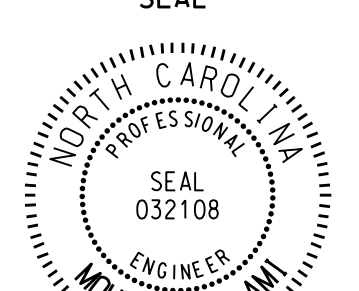
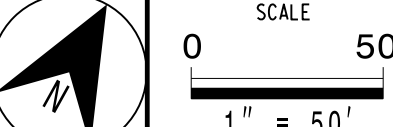


- 1) NOTIFY THE DIVISION 05 REGIONAL ITS ENGINEER, CLIFF BRAAM, AT 919-825-2635 FIVE (5) DAYS PRIOR TO BEGINNING WORK ON FIBER-OPTIC SYSTEM COMMUNICATIONS CABLE. NOTIFY THE REGIONAL ITS ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE FIBER-OPTIC SYSTEM IS BACK UP AND OPERATIONAL.
- 2) NOTIFY THE NORTH CAROLINA TURNPIKE AUTHORITY ROADSIDE TOLL TECHNOLOGY MANAGER, RACHEL RUIZ, AT 919-710-0115 FIVE (5) DAYS PRIOR TO BEGINNING WORK ON FIBER-OPTIC SYSTEM COMMUNICATIONS CABLE. NOTIFY THE ROADSIDE TOLL TECHNOLOGY MANAGER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE FIBER-OPTIC SYSTEM IS BACK UP AND OPERATIONAL.
- 3) AFTER NEW 24-FIBER CABLE HAS BEEN INSTALLED AND SPLICED, REMOVE EXISTING 24-FIBER CABLE. REMOVE EXISTING JUNCTION BOXES AND BACKFILL WITH SUITABLE MATERIAL. ABANDON EXISTING CONDUIT IN PLACE.

TMP PHASE 1

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

 <small>750 N. Greenfield Pkwy., Garner, NC 27529</small>	COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS		 <small>SEAL 032108</small> MOHD A. ASLAM <small>ENGINEER</small>
	<small>Prepared in the Offices of:</small> <small>DIVISION 05 WAKE COUNTY</small> <small>PLAN DATE: JULY 2019</small> <small>PREPARED BY: A. J. SKUCE</small>	<small>REVIEWED BY:</small> <small>DocuSigned by: Neil Avery</small> <small>DATE: _____</small>	
<small>SCALE</small>  <small>1" = 50'</small>	<small>DocuSigned by: Mohd Aslami</small> <small>7/29/2019</small> <small>DATE</small>		<small>SEAL</small>