

NOTES:

- 1) NOTIFY THE THE CITY OF GOLDSBORO ENGINEER AT 919-580-4367 FIVE (5) DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
- 2) CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.
- 3) ALL NCDOT FIBER ATTACHMENT POINTS ARE 40" BELOW POWER, FRONT SIDE OF POLE, UNLESS NOTED OTHERWISE


Prepared in the offices of:

RAMEY KEMP ASSOCIATES, INC.
 Transportation Engineers
 5809 Faringdon Place, Suite 100
 Raleigh, North Carolina 27609
 919-872-5115 Tel. 919-878-5416 Fax.
 www.rameykemp.com, NC License No. C-0910

Prepared for:

750 N. Greenfield Pkwy., Garner, NC 27529

Cable Routing Plan	
Division 4	Wayne County
Goldsboro	
PLAN DATE: January 2020	REVIEWED BY: WJ Hamilton
PREPARED BY: TS Popelka	RKA PROJ NO: 17028 (040)
REVISIONS	INIT. DATE

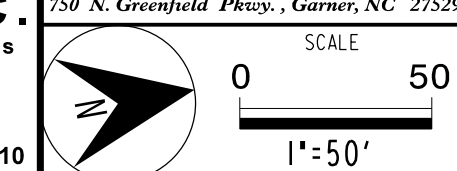

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

William J. Hamilton 1-31-2020

SIGNATURE DATE