04-0414 SR 1555 (11th Street) US 117 (North William Street)

PROJECT REFERENCE NO. U-2714

LEGEND X = FUSION SPLICE

COLOR CODE TIA/EIA 598-A


(7) RED (1) BLUE

(2) ORANGE (8) BLACK

(3) GREEN (9) YELLOW (4) BROWN (10) VIOLET

(5) SLATE

(11) ROSE (12) AQUA (6) WHITE

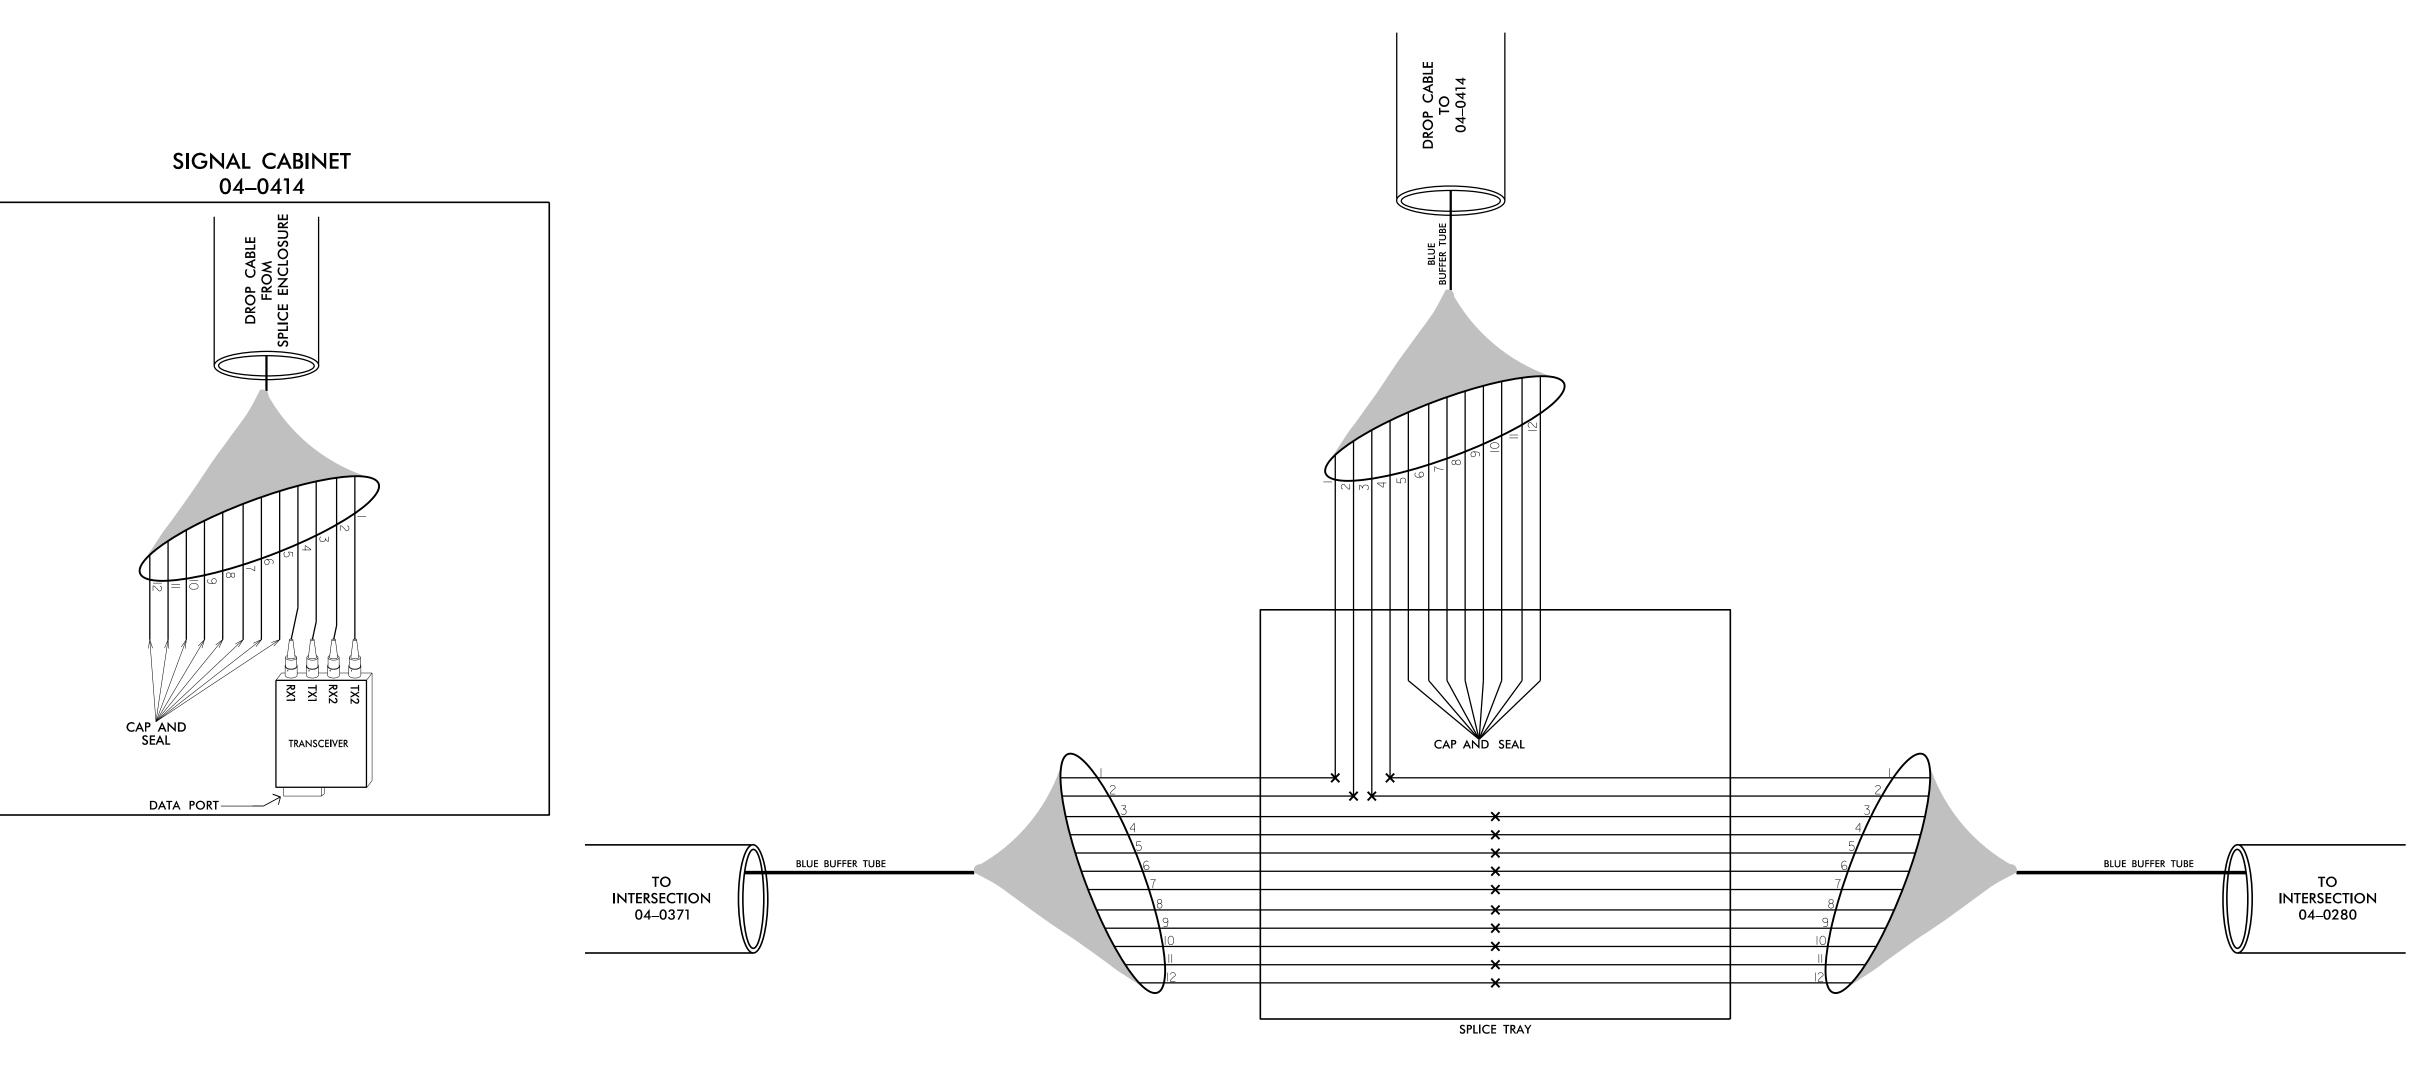

NOTES:

1) NOTIFY THE CITY OF GOLDSBORO ENGINEER AT 919-580-4367 FIVE (5) DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE CITY OF GOLDSBORO ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL

2) CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENT DIFFERS FROM THE SUPPLIED SPLICE DETAILS.

3) TRANSCEIVER TERMINATION CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING \ ENSURING PROPER TERMINATIONS.

4) INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING: REFERENCE SECTION 1731 "FIBER OPTIC SPLICE ENCLOSURE"

1) SPLICE LOCATION

2) DATE

3) COMPANY NAME

4) NAME OF INDIVIDUAL PERFORMING THE SPLICING

PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPLICE TRAY AND INFORMATION SHOWN ABOVE (1-4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS.

> TRANSCEIVER TERMINATION CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING/ENSURING PROPER TERMINATIONS.



919-872-5115 Tel. 919-878-5416 Fax.


www.rameykemp.com, NC License No. C-0910



NONE

Splice Details

Division 4 Wayne County Goldsboro PLAN DATE: January 2020 REVIEWED BY: WJ Hamilton PREPARED BY: TS Popelka RKA PROJ NO: 17028 (040) REVISIONS INIT. DATE



William J. Hamiltoll 1-31-20 CADD Filename: