


TYPICAL SECTION NO. 1

MAP NO. 1
SR 1428 (RIGGS RD.)
MP 1.12 - MP 5.51

MAP NO. 6
SR 1519 (OLD FOLKSTONE RD.)
MP 0.00 - MP 3.75
NO ASPHALT WORK BRIDGE #182

MAP NO. 10
SR 1445 (NORRIS RD.)
MP 0.00 - MP 0.90

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ.YD.
C2	PROP. APPROX. 1½" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ.YD.
C3	PROP. APPROX. 3" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ.YD. IN EACH OF TWO LAYERS.
C4	PROP. APPROX. 1" DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S4.75A, AT AN AVERAGE RATE OF 110 LBS. PER SQ.YD.
T	EARTH MATERIAL (SHOULDER RECONSTRUCTION)
U	EXISTING PAVEMENT
V1	MILLING ASPHALT PAVEMENT, 1½" DEPTH

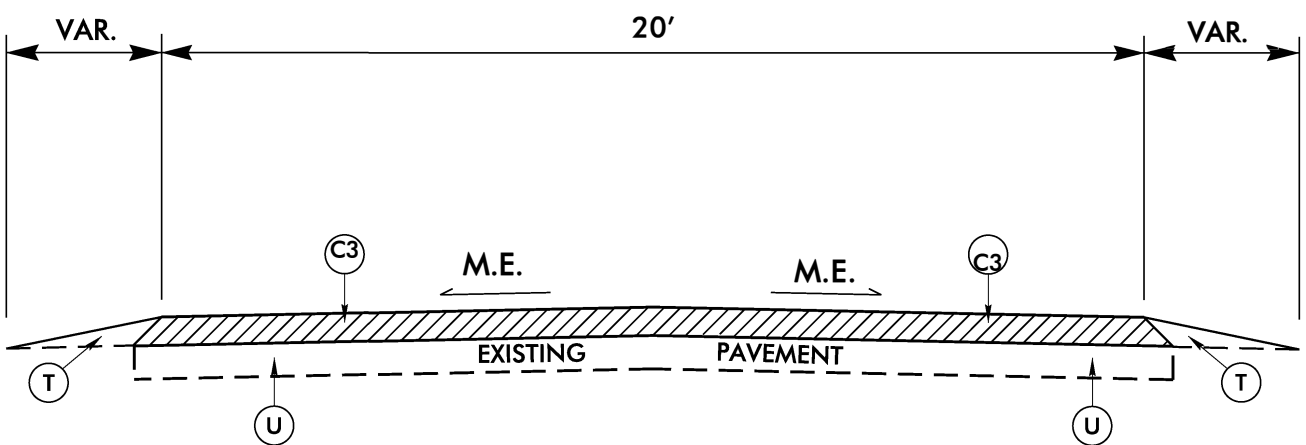

TYPICAL SECTION NO. 2

MAP NO. 2
SR 1428 (RIGGS RD.)
MP 8.64 - MP 8.79

MAP NO. 3
SR 1746 (BARBOUR RD.)
MP 0.00 - MP 0.25

REVISIONS

01-OCT-2020 17:09
 S:\Division\Resurfacing\Resurfacing Data\2021\Resurfacing\NONSLOW\RALEIGH SUBMITTAL\2021\Onslow_Typical1.sldgn