ROBERTS ST. CRAVEN ST. € BENT 5 — ♠ BRIDGE


NOTES

PAYMENT FOR CLASS II SURFACE PREPARATION IS BASED ON THE SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING INITIAL HYDRO-DEMOLITION OF THE BRIDGE DECK. SEE SPECIAL PROVISIONS.

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

FOR SECTION B-B, SEE "JOINT DETAILS LMC OVERLAY", SHEET 1 OF 3.

AS-BUILT REPAIR Q	I YTINAL	TABLE
DECK SURFACE REPAIR SPAN F		
	ESTIMATE	ACTUAL
CLASS II SURFACE PREPARATION	0.2 SQ. YDS.	
CLASS III SURFACE PREPARATION	0.0 SQ. YDS.	
LMC-ES MATERIALS	36.1 CU. YDS.	
PLACING & FINISHING LMC-ES OVERLAY	861.4 SQ. YDS.	
SCARIFYING BRIDGE DECK	861.4 SQ. YDS.	
HYDRO-DEMOLITION OF BRIDGE DECK	861.4 SQ. YDS.	
GROOVING BRIDGE FLOORS	7363.2 SQ. FT.	
BRIDGE JOINT DEMOLITION	64.0 SQ.FT.	
CONCRETE FOR DECK REPAIR	0.0 CU.FT.	

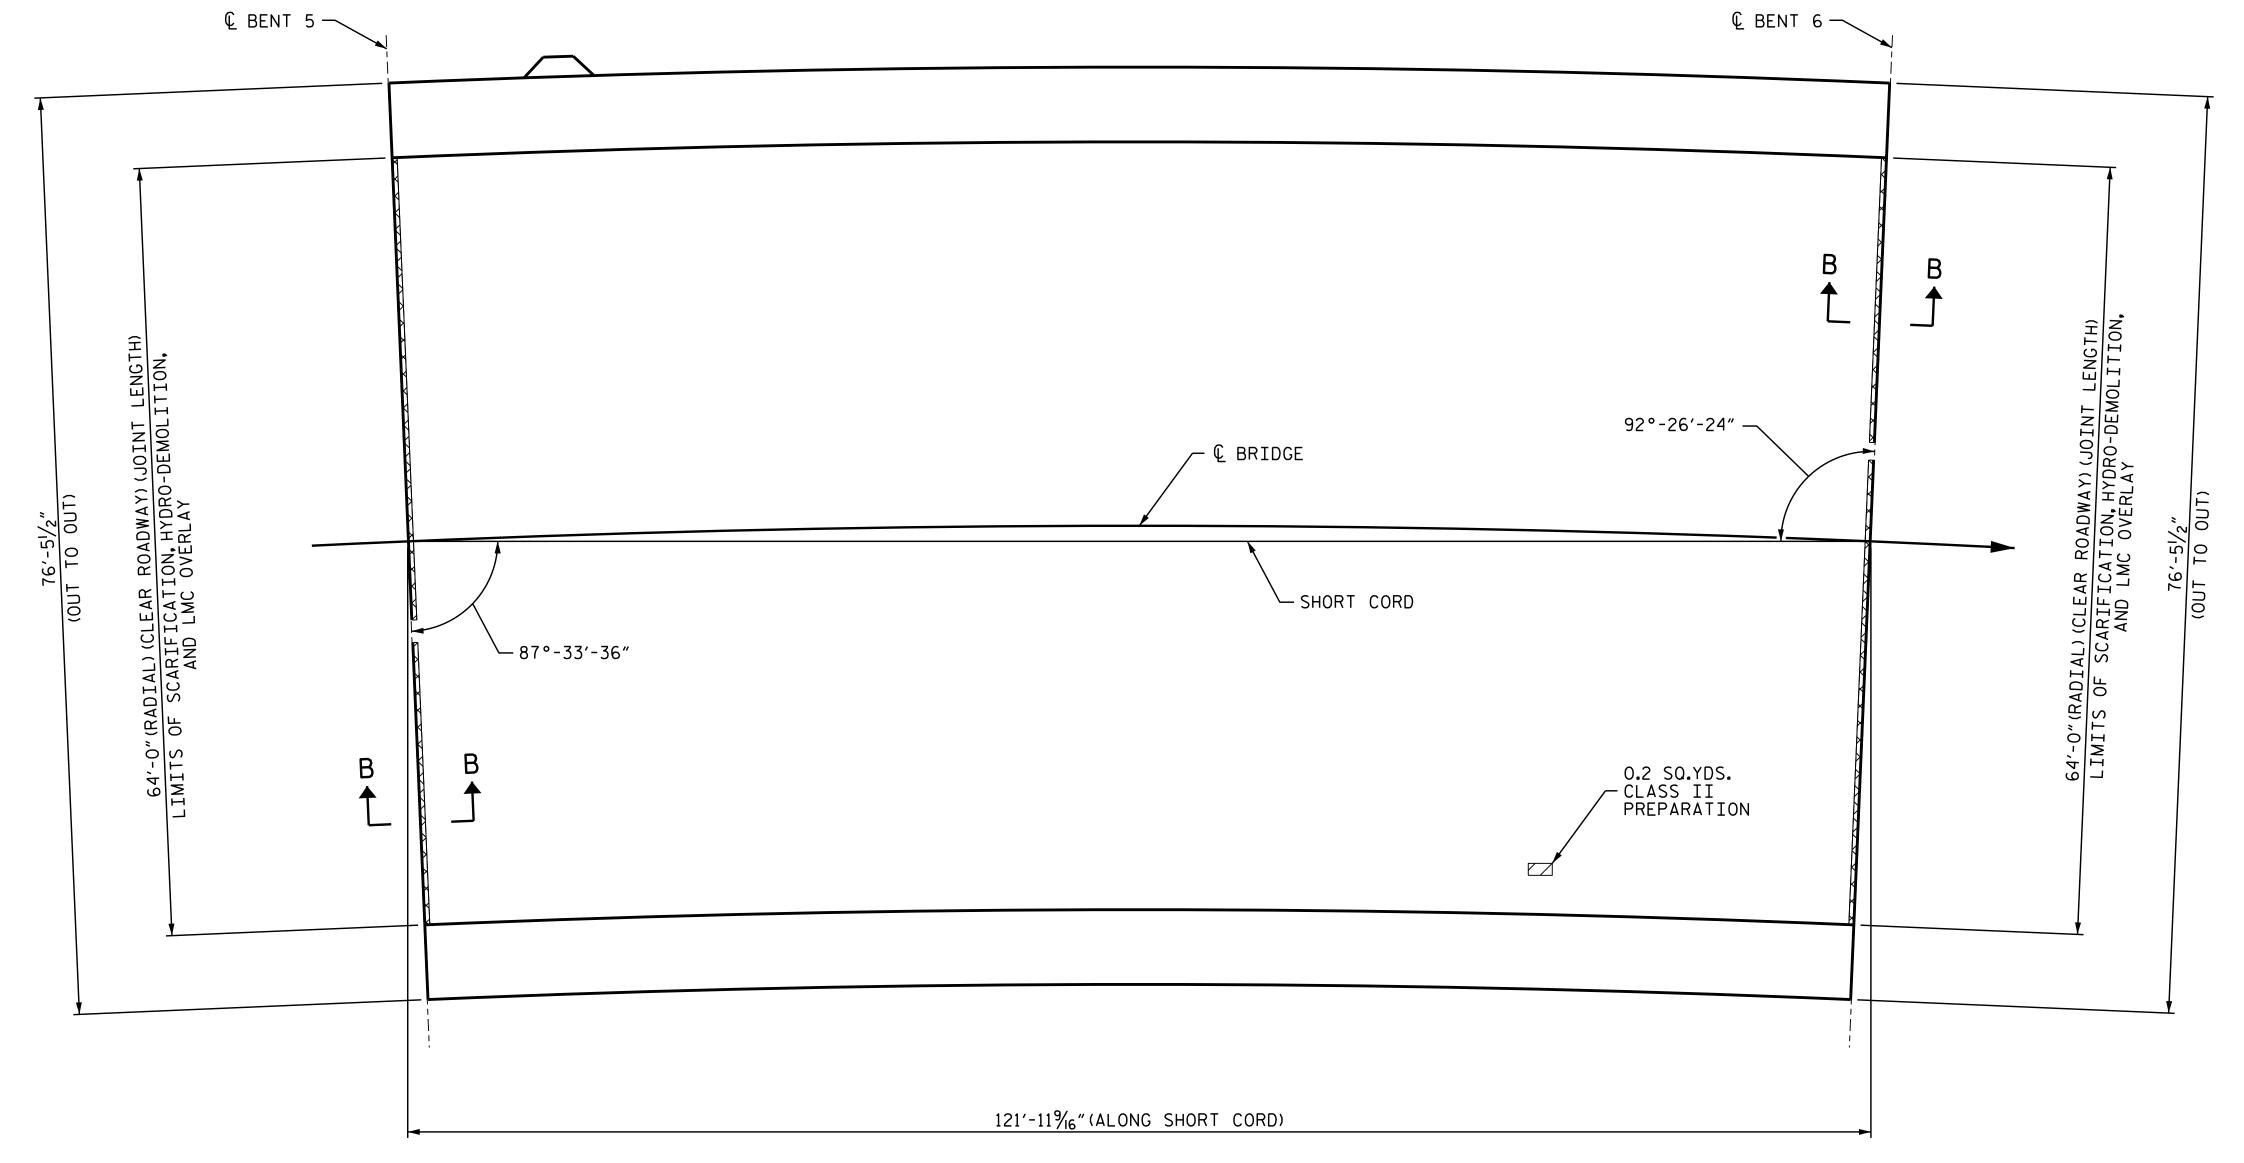

SPAN F

CLASS II SURFACE PREPARATION

BRIDGE JOINT DEMOLITION

CLASS III SURFACE PREPARATION

PROJECT NO. 15BPR.40 BUNCOMBE ___ COUNTY BRIDGE NO. 100705

SHEET 6 OF 7

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
RALEIGH

DECK SURFACE REPAIR SPAN F

SESSION SEAL 031021 NOINEER

REVISIONS SHEET NO S3-11 NO. BY: DATE: DATE: DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED TOTAL SHEETS 36

__ DATE : <u>01/2019</u> __ DATE : <u>03/2019</u> CL BRIGHT DRAWN BY : _ A.M.LEE CHECKED BY :