




TYPICAL SECTION 1
MAP 10 OLD HARGRAVE RD SR1222

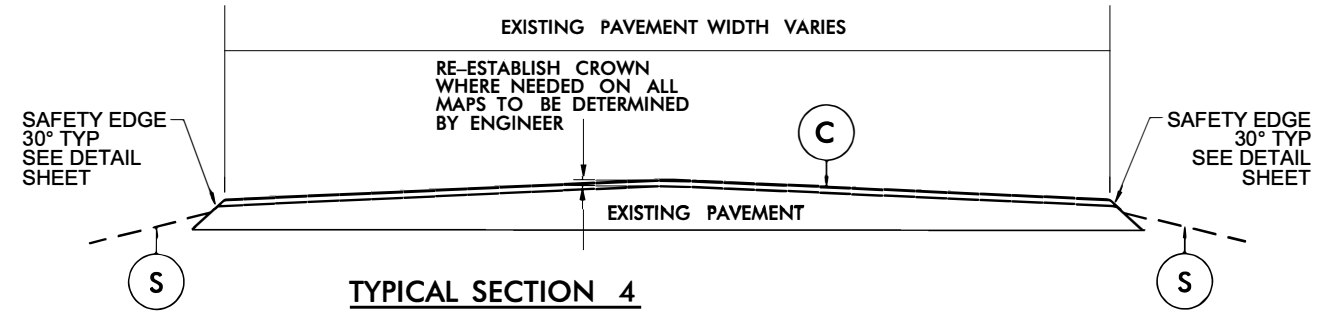


TYPICAL SECTION 4
MAP 10 OLD HARGRAVE RD SR1222
MAP 11 GREEN NEEDLES RD SR1297

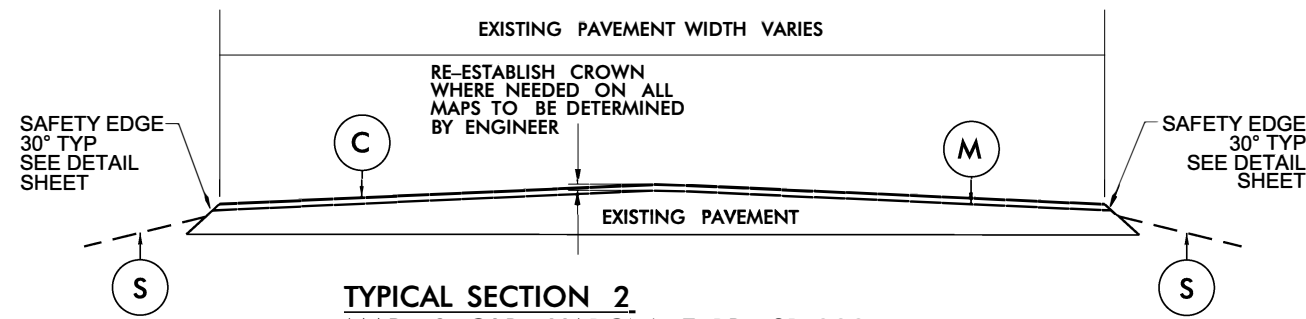

TYPICAL SECTION 2
MAP 10 OLD HARGRAVE RD SR1222

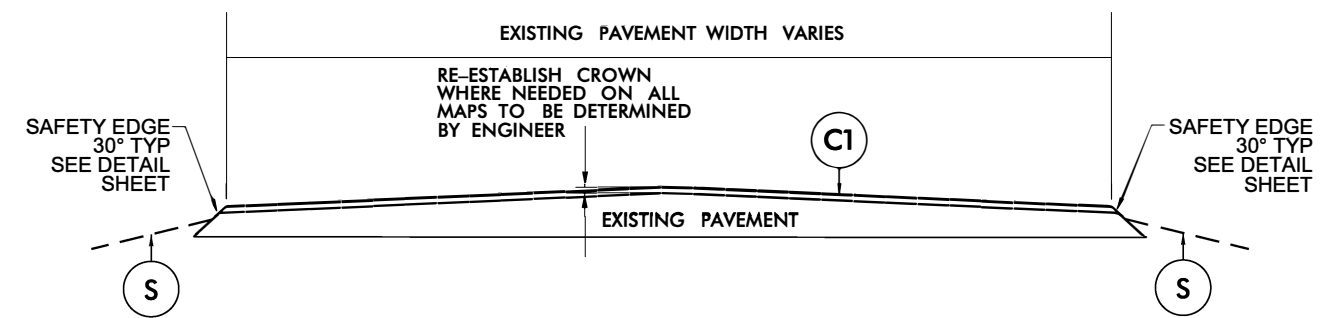

TYPICAL SECTION 5
MAP 2 SUNSET RD SR1522
MAP 3 CENTRAL RD SR1520
MAP 6 LEONARD RD SR1417
MAP 7 TURNER RD SR2005
MAP 8 ROY LOPP RD SR2014
MAP 9 PILOT SCHOOL RD SR2031
MAP 12 BADIN LAKE RD SR2554
MAP 13 SMITH FARM RD SR2015

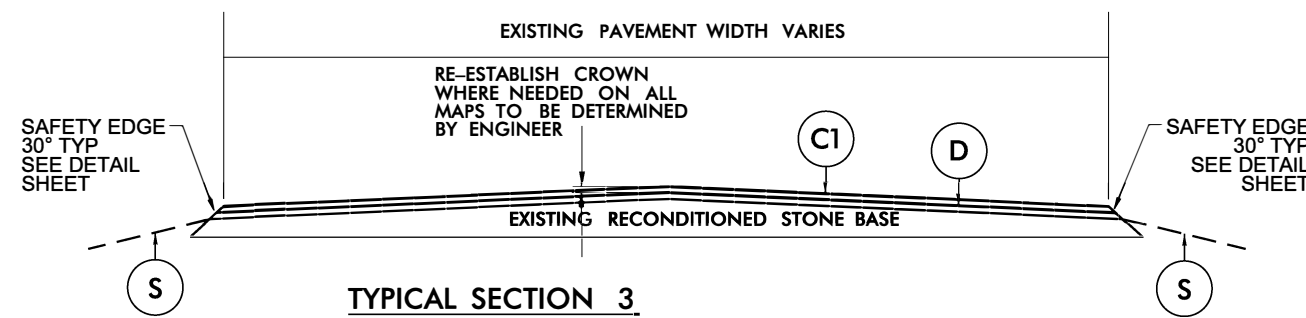

TYPICAL SECTION 3
MAP 5 HOPE RD SR1585

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
D	PROP. APPROX. 2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119.0C, TO BE APPLIED AT AN AVERAGE RATE OF 228 LBS PER SQ YD.
F	ASPHALT SURFACE TREATMENT, SINGLE SEAL 14m TO BE APPLIED AT AN AVERAGE RATE OF 11 LBS/SY, EMULSION RATE OF 0.20 GAL/SY
M	MILL ASPHALT PAVEMENT, 1½" DEPTH ENTIRE WIDTH
M1	MILL ASPHALT PAVEMENT, 0" TO 1½"
S	SHOULDER RECONSTRUCTION (SEE DETAIL)