

ECONOLITE ASC/3-2070 ACTION PLAN PROGRAMMING DETAIL

1. From Main Menu select 5. TIME BASE
2. From TIME BASE Submenu select 2. ACTION PLAN

```

ACTION PLAN...[ 1]
PATTERN.....AUTO   SYS OVERRIDE.... NO
TIMING PLAN..... 0   SEQUENCE..... 0
VEH DETECTOR PLAN.. 2 DET LOG.....NONE
FLASH..... --      RED REST..... YES
VEH DET DIAG PLN.. 0 PED DET DIAG PLN..0
DIMMING ENABLE.. NO  PRIORITY RETURN. NO
PED PR RETURN.. NO  QUEUE DELAY..... NO
PMT COND DELAY   NO

  PHASE  1  2  3  4  5  6  7  8  9  0  1  2  3  4  5  6
PED RCL  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
WALK 2   .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
VEX 2    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
VEH RCL  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
MAX RCL  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
MAX 2    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
  PHASE  1  2  3  4  5  6  7  8  9  0  1  2  3  4  5  6
MAX 3    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
CS INH   .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
OMIT     .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
SPC FCT  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
AUX FCT  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
          1  2  3  4  5  6  7  8  9  0  1  2  3  4  5


LP 1-15  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 16-30 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 31-45 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 46-60 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 61-75 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 76-90 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 91-100 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
    
```

← SET RED REST TO "YES"

3. From TIME BASE Submenu Select 1. Clock/Calendar Data
4. Enable Action Plan 1

Project #: 180914

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 07-0904T1
DESIGNED: April 2020
SEALED: 04/20/2020
REVISED: N/A

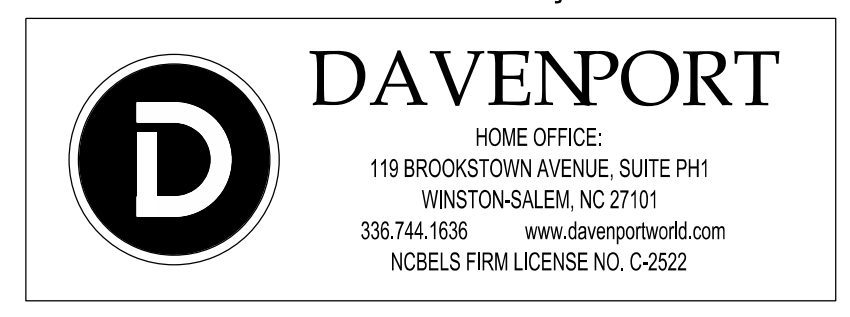

Electrical Detail - Sheet 2 of 2
Temporary Design 1 (TMP Phase III - Step 4)

**DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED**

<p><small>ELECTRICAL AND PROGRAMMING DETAILS FOR:</small></p> <p><small>Prepared In the Offices of:</small></p> <p><small>750 N. Greenfield Pkwy, Corner, NC 27529</small></p>	<p>SR 4771 (Reedy Fork Parkway) at US 29 Southbound Ramps</p> <p><small>Division 7 Guilford County Greensboro</small></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><small>PLAN DATE:</small> April 2020</td> <td style="border: none;"><small>REVIEWED BY:</small> L. Boyer</td> </tr> <tr> <td style="border: none;"><small>PREPARED BY:</small> A. Ravipati</td> <td style="border: none;"><small>REVIEWED BY:</small></td> </tr> </table> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><small>REVISIONS</small></td> <td style="border: none;"><small>INIT.</small></td> <td style="border: none;"><small>DATE</small></td> </tr> <tr> <td style="border: none;"> </td> <td style="border: none;"> </td> <td style="border: none;"> </td> </tr> </table>	<small>PLAN DATE:</small> April 2020	<small>REVIEWED BY:</small> L. Boyer	<small>PREPARED BY:</small> A. Ravipati	<small>REVIEWED BY:</small>	<small>REVISIONS</small>	<small>INIT.</small>	<small>DATE</small>				<p>SEAL</p> <p><small>DocuSigned by: Lori M. Boyer 04/20/2020</small></p> <p><small>SIG. INVENTORY NO. 07-0904T1</small></p>
<small>PLAN DATE:</small> April 2020	<small>REVIEWED BY:</small> L. Boyer											
<small>PREPARED BY:</small> A. Ravipati	<small>REVIEWED BY:</small>											
<small>REVISIONS</small>	<small>INIT.</small>	<small>DATE</small>										