



SUMMARY OF WORK BY CABLE ROUTING PLANS

| CABLE ROUTING SHEET NUMBER | STANDARD GUY ASSEMBLY | AERIAL GUY ASSEMBLY | SIDEWALK GUY ASSEMBLY | COMMUNICATIONS CABLE (12-FIBER) | COMMUNICATIONS CABLE (48-FIBER) | DROP CABLE (12-fiber) | HAND LASH AND INSTALL AERIAL CABLE PROTECTOR | SPLICE ENCLOSURE | INTERCONNECT CENTER | ETHERNET EDGE SWITCH | REMOVE EXISTING COMMUNICATIONS AND MESSENGER CABLE | REMOVE EXISTING COMMUNICATIONS CABLE | INSTALL CCTV ASSEMBLY | ETHERNET CABLE | 1" RISER WITH WEATHERHEAD FOR ETHERNET CABLE | 2" RISER WITH HEAT SHRINK TUBING | HEAT SHRINK TUBING KIT |
|----------------------------|-----------------------|---------------------|-----------------------|---------------------------------|---------------------------------|-----------------------|--|------------------|---------------------|----------------------|--|--------------------------------------|-----------------------|----------------|--|----------------------------------|------------------------|
| | EA | EA | EA | LF | LF | LF | LF | EA | EA | EA | LF | LF | EA | LF | EA | EA | EA |
| CRP-037 | 1 | | | 1,400 | | | | | 3 | 3 | | | | | | 2 | |
| CRP-038 | 1 | | | 1,020 | 725 | | | | 2 | 2 | | | 1 | 85 | | | |
| CRP-039 | 1 | | | | 1,185 | | | | | | | | | | | | |
| CRP-040 | | | | | 1,420 | | | | | | | | | | | | |
| CRP-041 | 2 | | 1 | | 1,870 | 520 | | 1 | 2 | 2 | | | 1 | 180 | 1 | 2 | |
| CRP-042 | | | | | 750 | | | 1 | | | | | | | | | |
| CRP-043 | | | | | 1,515 | | | | | | | | | | | | |
| CRP-044 | | | | | 1,635 | 190 | | 1 | 1 | 1 | | | 1 | 70 | | | |
| CRP-045 | | | | | 1,495 | 215 | | 1 | 1 | 1 | | | | | | | |
| CRP-046 | | | | | 1,495 | | | | | | | | | | | | |
| CRP-047 | | | | | 1,495 | | | | | | | | | | | | |
| CRP-048 | | | | | 1,545 | | | | | | | | | | | | |
| CRP-049 | | | | | 1,530 | | | | | | | | | | | | |
| CRP-050 | | | | | 1,600 | 170 | | 1 | 1 | 1 | | | 1 | 210 | | | |
| CRP-051 | | | | | 1,505 | | | | | | | | | | | | |
| CRP-052 | | | | | 1,435 | | | | | | | | | | | | |
| CRP-053 | | | | | 1,725 | | | | | | | | | | | | |
| CRP-054 | | | | | 1,360 | | | | | | | | | | | | |
| CRP-055 | 3 | | | | 1,986 | 232 | | 1 | 1 | 1 | 43 | | | | | 1 | 1 |
| CRP-056 | 1 | 1 | | | 1,676 | 180 | | 1 | 1 | 1 | | | | | | 1 | 1 |
| CRP-057 | | | | | 1,510 | | | | | | | | | | | | |
| CRP-058 | 3 | | | | 1,653 | 185 | | 1 | 1 | 1 | | | 1 | 225 | 1 | 1 | |
| CRP-059 | | | | | 1,557 | | | | | | | | | | | | |
| CRP-060 | 4 | | | | 1,640 | 95 | | 1 | 1 | 1 | | | 1 | 327 | 1 | | |
| CRP-061 | | | | | 1,150 | | | | | | | | | | | | |
| CRP-062 | 3 | | | | 850 | 100 | | 1 | 1 | 1 | | | 1 | 260 | 1 | | |
| CRP-063 | | | | | 1,320 | | | | | | | | | | | | |
| CRP-064 | 2 | | | | 1,829 | 390 | | 2 | 2 | 2 | | | | | | 2 | |
| CRP-065 | | | | | 1,520 | | | | | | | | | | | | |
| CRP-066 | 2 | | | | 1,935 | | | | | | | | | | | 2 | |
| CRP-067 | 1 | | | | 1,627 | | | | | | | | | | | 1 | |
| CRP-068 | 3 | | | | 1,530 | 100 | | 1 | 1 | 1 | | | 1 | 205 | 1 | 1 | |
| CRP-069 | | | 1 | | 1,529 | 175 | | 1 | 1 | 1 | | | | | | 1 | |
| Total | 62 | 1 | 5 | 14,785 | 91,329 | 9,497 | 75 | 38 | 44 | 44 | 11,176 | 2,142 | 20 | 3,587 | 16 | 38 | 12 |

- Work shown on this sheet is a summary of work for the installation of the fiber-optic cable and CCTV installations that are shown on the cable routing plans (i.e. CRP sheets). Work to be done for traffic signals is shown separately on the signal designs and the "Summary of Work by Intersection" sheets in Volume III of III.
- The items listed above are for informational purposes only and represent work that is necessary to complete the project and are not necessarily pay items. See Summary of Quantities and the Project Special Provisions for defined Pay Items for this contract.

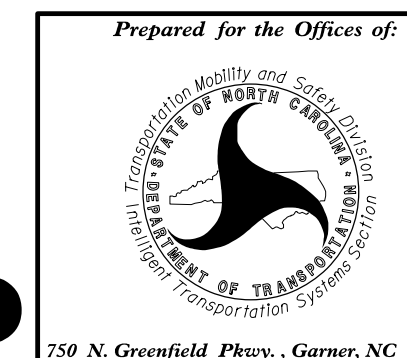

Prepared for the Offices of:
 Elizabeth City Signal System
 Summary of Work by
 Cable Routing Plans
 (sheet 4 of 4)
 Division 1 Pasquotank County Elizabeth City
 PLAN DATE: April 2018 REVIEWED BY: RD Lawton
 PREPARED BY: DJ White REVIEWED BY: LW Moon

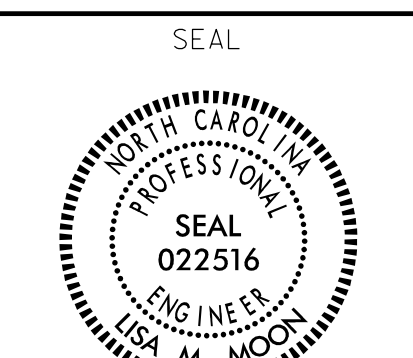

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

| REVISIONS | INIT. | DATE |
|-----------|-------|------|
| | | |
| | | |

DocuSigned by:
 Lisa Moon
 1/16/2019
 DATE
 CADD Filename:

N. T. S.