

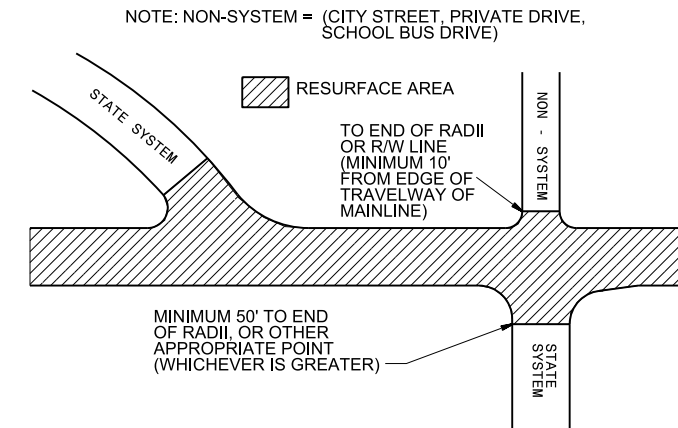


- | | |
|------------------------------------|-----------------------------------|
| MAP 2 SR 1114 – VINSON RD | MAP 10 SR 1375 – ARTHUR CARTER LN |
| MAP 3 SR 1159 – PARKDALE RD | MAP 11 SR 1376 – GREEN TREE RD |
| MAP 4 SR 1311 – HODGES DAIRY RD | MAP 12 SR 1501 – GATEWOOD EXT RD |
| MAP 5 SR 1337 – BOYD'S CROSSING RD | MAP 13 SR 1540 – RACE TRACK RD |
| MAP 6 SR 1341 – LAW RD | MAP 14 SR 1545 – SUNSET DR |
| MAP 7 SR 1352 – FITZGERALD RD | MAP 15 SR 1563 – GATEWOOD RD |
| MAP 8 SR 1353 – US OLD 29 HWY | MAP 16 SR 1592 – ATWATER ST |
| MAP 9 SR 1374 – BURKE RD | MAP 19 SR 1771 – MAIN ST |

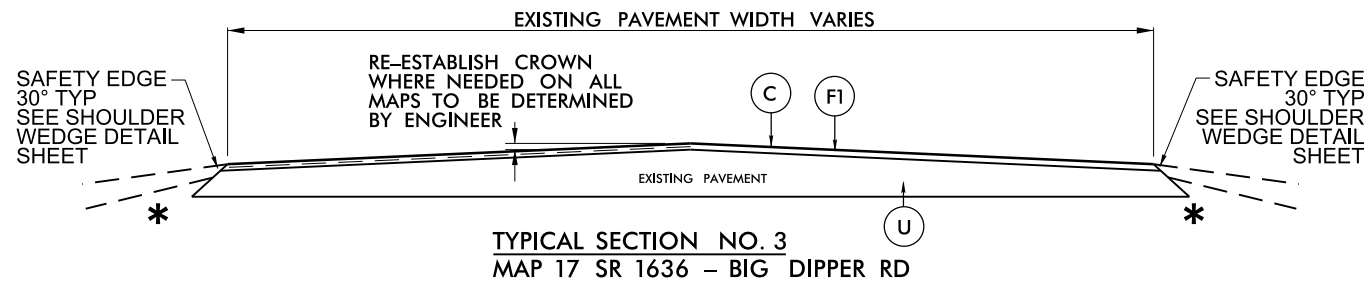

PAVING DETAIL 1
MAIN LINE IS BEING RESURFACED

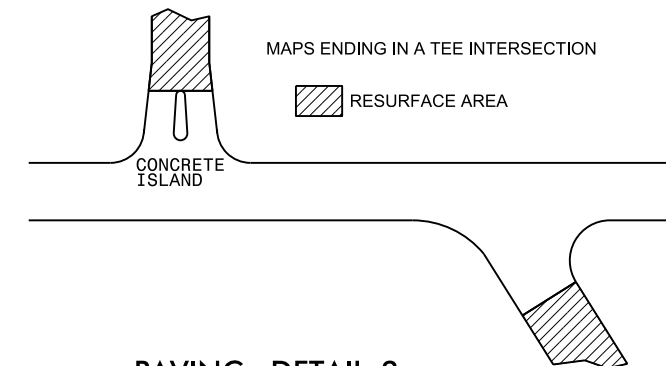

PAVING DETAIL 2
MAIN LINE NOT BEING RESURFACED

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 110 LBS PER SQ YD
C1	PROP. APPROX. 1 1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 137.5 LBS PER SQ YD
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD
D	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I9.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
F	AST MAT COAT, #67 STONE
F1	AST MAT COAT, #78M STONE
V2	MILL ASPHALT PAVEMENT, 4" DEPTH
U	EXISTING PAVEMENT

* NOTE:
Shoulder work will be handled/performed by state forces