
PROJECT REFERENCE NO.	SHEET NO.
2021CPT.05J8.2035IJ.ET0	13
Office of:	THE LICENSE NO. P-0339

## PAVEMENT SCHEDULE

C1	PROP. APPROX. $1\frac{1}{4}$ " ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.	S	SHOULDER GRADING, ASB REQUIRED (EXCEPT AT RESIDENTIAL AREAS)	
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	U	EXISTING PAVEMENT	

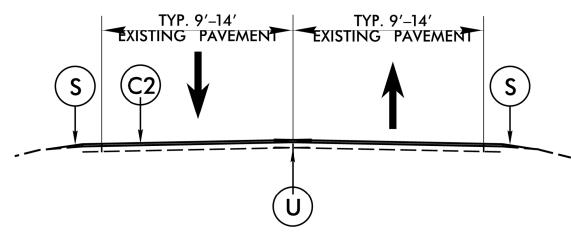


## TYPICAL SECTION 1

FULL DEPTH PATCHING AND RESURFACE \$9.5B

MAP NOs. 1, 2, 5, 7, 8, 14–18, 22–28, 31–33

\* MAP 1 BERT WINSTON RD. SR 1133 TIE IN TO EXISTING JOINT ON EACH SIDE OF THE RAILROAD TRACK.

\* MAP 14 PERSON RD. SR 1433
MILL 1.5" +/\_ ON MAP 14 BRIDGE
#52 AS DIRECTED BY THE ENGINEER
TO RESURFACE AND NOT ADD ANY
ADDITIONAL WEIGHT ON THE BRIDGE.

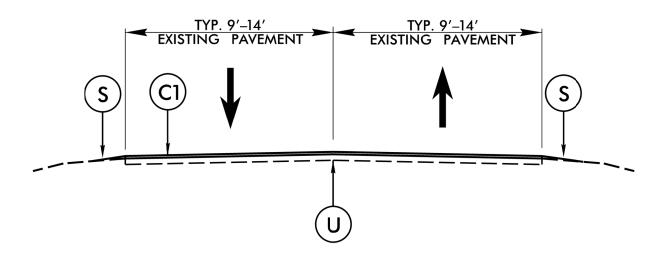

## TYPICAL SECTION 2

FULL DEPTH PATCHING AND RESURFACE S9.5B

MAP NOs. 3, 4, 6, 9-13, 19-21, 29, 30