



BILL OF MATERIAL					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
A1	16	4	STR	2'-3"	24
A2	16	4	STR	3'-5"	37
A3	8	4	STR	17'-8"	94
H1	20	4	STR	2'-8"	36
H2	4	4	STR	5'-8"	15
H3	4	4	STR	9'-7"	26
H4	8	4	STR	35'-8"	191
L1	120	6	1	2'-0"	360
N2	10	5	3	6'-2"	64
N3	14	5	3	5'-2"	75
N4	36	5	3	4'-2"	156
V1	12	4	STR	5'-3"	42
V2	10	4	STR	4'-3"	28
V3	14	4	STR	3'-3"	30
V4	36	4	STR	2'-3"	54
Z1	60	5	2	5'-3"	329
Z2	60	4	STR	4'-8"	187
Z3	16	4	4	5'-0"	53
REINFORCING STEEL				1801 LBS.	
CLASS A CONCRETE BREAKDOWN					
POUR #2 HEADWALL (HEADWALL STEM & HEADWALL FOOTING)				14.9 C.Y.	
TOTAL CLASS A CONCRETE				14.9 C.Y.	

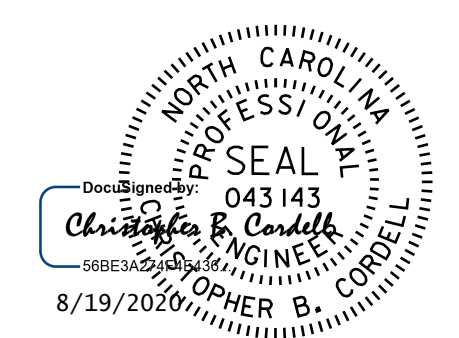

PROJECT NO. U-5887
HENDERSON COUNTY
 STATION: 22+44.41 -L-
 SHEET 13 OF 21

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

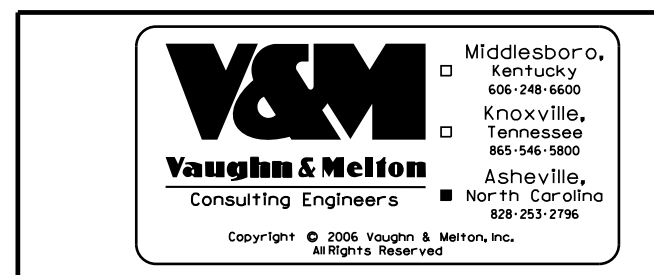

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

INLET HEADWALL AND
 HEADWALL FOOTING
 BILL OF MATERIAL

DRAWN BY: HL	DATE: 03/2020	REVISIONS				SHEET NO.		
CHECKED BY: CBC	DATE: 03/2020	NO.	BY:	DATE:	NO.	BY:	DATE:	C-13
ENG. OF RECORD: CBC	DATE: 03/2020	1			3			TOTAL SHEETS
		2			4			36