


PAVEMENT SCHEDULE			
A1	PROP. 11" PORTLAND CEMENT CONCRETE PAVEMENT		
B1	PROP. APPROX. 5/8" ULTRA-THIN BONDED WEARING COURSE, AT AN AVERAGE RATE OF 70 LBS. PER SQ. YD.		
C1	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.		
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
СЗ	PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, IN 2 SEPARATE 1.5" LIFTS AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.		
D1	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.		
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE,B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.		
E2	PROP. APPROX. 8.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, IN 2 SEPARATE 4" LIFTS AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.		
R1	PROP. 2'6" CONCRETE CURB AND GUTTER 11" THICK		
Т	SHOULDER CONSTRUCTION		
U	EXISTING PAVEMENT		
V2	MILLING 1.5" DEPTH		
V3	MILLING, 2.0" DEPTH		
Υ	MILLED RUMBLE STRIPS		
Z	EXISTING STABILIZED SUBGRADE		

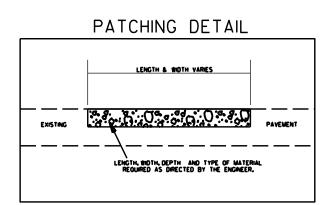




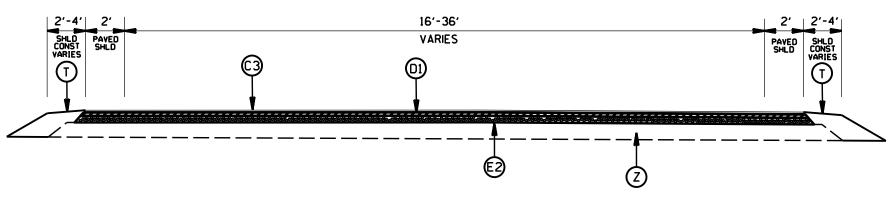

## TYPICAL SECTION NO.23 OFF RAMP TO STATESVILLE AVE

SUMMARY OF EARTHWORK			
DESCRIPTION	MAP #15	MAP #19	
UNCLASSIFIED EXCAVATION	2146 CY	1282 CY	
BORROW EXCAVATION	100 CY	100 CY	
REMOVAL OF EXISTING ASPHALT PAVEMENT	8360 SY	5186 SY	
SHOULDER CONSTRUCTION	0.72 SMI	0.45 SMI	

NOTE: QUANTITIES ARE APPROXIMATE, AND ARE ONLY TO BE USED FOR THE PURPOSE OF BIDDING THIS CONTRACT. PAYMENT FOR EARTH WORK QUANTITIES WILL BE COVERED UNDER COMPREHENSIVE GRADING AS A LUMP SUM PAY ITEM AS DETERMINED BY THE RESIDENT ENGINEER.

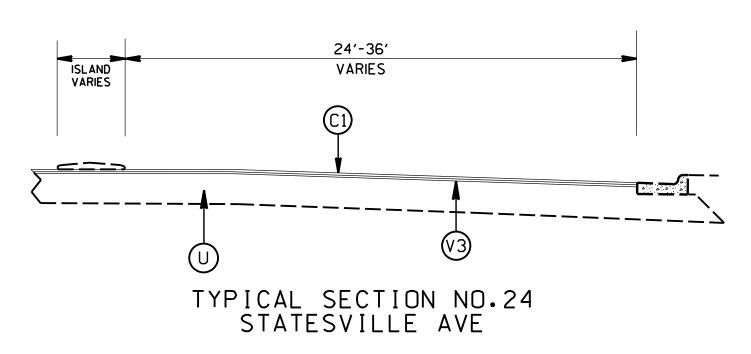

I-5905 I-85 PAVEMENT PRESERVATION MECKLENBURG COUNTY

SCALE	-NA-
DATE	3/19
DWG. BY	JHE
DESIGN BY	JHE
APPROVED	



