


THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT EXCEPT WHEN OTHERWISE NOTED IN THE PLAN OR DIRECTED BY THE ENGINEER.

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE PLAN, STANDARD DETAILS, AND ROADWAY STANDARD DRAWINGS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS, OR RESULT IN DUPLICATE OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE MOVING, SUPPLEMENTING, COVERING, OR REMOVAL OF DEVICES AS DIRECTED BY THE ENGINEER.

REFER TO THE NCDOT 2018 STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES FOR ADDITIONAL REQUIREMENTS.

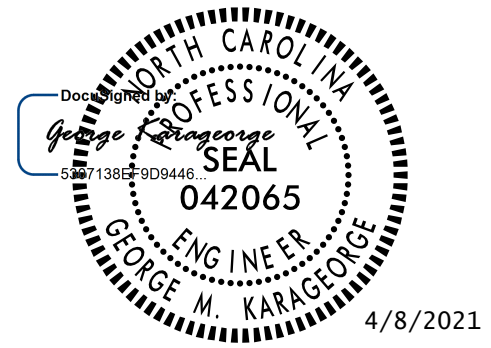

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Michael Baker
INTERNATIONAL

TIME RESTRICTIONS - REFER TO INTERMEDIATE CONTRACT TIMES

TEMPORARY LANE CLOSURE DAY AND TIME RESTRICTIONS

- MAINTAIN THE EXISTING NUMBER OF I-95 TRAVEL LANES AND DO NOT CLOSE OR NARROW A SINGLE LANE OF TRAFFIC ON I-95 DURING THE FOLLOWING PERIODS:

ROAD NAME	DAY AND TIME RESTRICTIONS
I-95 INCLUDING RAMPS/LOOPS	MONDAY THRU THURSDAY - 7:00 A.M. TO 7:00 P.M. AND FRIDAY THRU SUNDAY 7:00 A.M. TO 9:00 P.M.

WHERE THERE ARE THREE OR MORE LANES IN A DIRECTION OF TRAVEL ON I-95, MAINTAIN THE EXISTING TRAFFIC PATTERN AND DO NOT CLOSE OR NARROW TWO LANES OF TRAFFIC DURING THE FOLLOWING TIMES:

ROAD NAME	DAY AND TIME RESTRICTIONS
I-95 INCLUDING RAMPS/LOOPS	MONDAY THRU SUNDAY - 6:00 A.M. TO 11:00 P.M.

MAINTAIN A MINIMUM OF TWO (2) THRU-TRAVEL LANES ON THE FOLLOWING ROADS DURING THE FOLLOWING TIME RESTRICTIONS:

ROAD NAME	DAY AND TIME RESTRICTIONS
NC 50 US 421	MONDAY THRU FRIDAY - 7:00 A.M. TO 9:00 A.M. AND 4:00 P.M. TO 6:00 P.M.

- DO NOT CLOSE OR NARROW A LANE OF TRAFFIC ON AFOREMENTIONED FACILITIES, DETAIN, AND/OR ALTER THE TRAFFIC FLOW ON OR DURING HOLIDAYS, HOLIDAY WEEKENDS, SPECIAL EVENTS, OR ANY OTHER TIME WHEN TRAFFIC IS UNUSUALLY HEAVY. AT MINIMUM, THESE REQUIREMENTS/RESTRICTIONS SHALL APPLY TO THE FOLLOWING SCHEDULES:

ROAD NAME

ALL ROADS

- 1) FOR UNEXPECTED OCCURRENCES THAT CREATE UNUSUALLY HIGH TRAFFIC VOLUMES, AS DIRECTED BY THE ENGINEER.
- 2) FOR NEW YEAR'S, BETWEEN THE HOURS OF 7:00 A.M. DECEMBER 31ST TO 9:00 P.M. JANUARY 2ND. IF NEW YEAR'S DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY THEN UNTIL 9:00 P.M. THE FOLLOWING TUESDAY.
- 3) FOR EASTER, BETWEEN THE HOURS OF 7:00 A.M. THURSDAY AND 9:00 P.M. MONDAY.
- 4) FOR MEMORIAL DAY, BETWEEN THE HOURS OF 7:00 A.M. FRIDAY TO 9:00 P.M. TUESDAY.
- 5) FOR INDEPENDENCE DAY, BETWEEN THE HOURS OF 7:00 A.M. THE DAY BEFORE INDEPENDENCE DAY AND 9:00 P.M. THE DAY AFTER INDEPENDENCE DAY. IF INDEPENDENCE DAY IS ON A FRIDAY, SATURDAY, SUNDAY OR MONDAY; THEN BETWEEN THE HOURS OF 7:00 A.M. THE THURSDAY BEFORE INDEPENDENCE DAY AND 9:00 P.M. THE TUESDAY AFTER INDEPENDENCE DAY.
- 6) FOR LABOR DAY, BETWEEN THE HOURS OF 7:00 A.M. FRIDAY AND 9:00 P.M. TUESDAY.
- 7) FOR THANKSGIVING DAY, BETWEEN THE HOURS OF 7:00 A.M. TUESDAY TO 9:00 P.M. MONDAY.
- 8) FOR CHRISTMAS, BETWEEN THE HOURS OF 7:00 A.M. THE FRIDAY BEFORE THE WEEK OF CHRISTMAS DAY AND 9:00 P.M. THE FOLLOWING TUESDAY AFTER THE WEEK OF CHRISTMAS DAY.
- 9) FOR TOWN OF BENSON MULE DAYS EVENTS, BETWEEN THE HOURS OF 7:00 A.M. THE DAY BEFORE THE EVENT AND 9:00 P.M. THE DAY AFTER THE EVENT. THE 2020 MULE DAYS EVENT IS SCHEDULED FOR SEPTEMBER 24-27, THURSDAY-SUNDAY (TENTATIVE). COORDINATE WITH THE TOWN OF BENSON AND THE ENGINEER FOR EXACT TIMES FOR 2020 AND OTHER YEARS.
- 10) FOR THE NORTH CAROLINA STATE ANNUAL SINGING CONVENTION BETWEEN THE HOURS OF 7:00 A.M. THE DAY BEFORE THE EVENT AND 9:00 P.M. THE DAY AFTER THE EVENT. THIS EVENT IS NORMALLY HELD FRIDAY-SUNDAY AT SINGING GROVE PARK, 400 E MAIN ST., BENSON, NC DURING THE MONTH OF JUNE. THE EXACT DATES HAVE NOT BEEN SCHEDULED AT THE TIME THIS PLAN WAS PREPARED.

TEMPORARY ROAD CLOSURE DAY AND TIME RESTRICTIONS

- TEMPORARY ROAD CLOSURES ARE NOT ALLOWED EXCEPT AT THE SPECIFIC TIMES STATED IN THE PLANS, OR WHEN DIRECTED BY THE ENGINEER.

CLOSURES WITH OFF-SITE DETOURS

DO NOT CLOSE ROADS AS FOLLOWS:

ROAD NAME	DAY/TIME RESTRICTIONS
I-95	6:00 A.M. -11:00 P.M.
US-421	6:00 A.M. -11:00 P.M.

DO NOT CLOSE ANY NC 50 RAMPS DURING THE NORTH CAROLINA STATE ANNUAL SINGING CONVENTION HELD IN BENSON, NC BETWEEN THE HOURS OF 7:00 A.M. THE DAY BEFORE THE EVENT AND 9:00 P.M. THE DAY AFTER THE EVENT.

CLOSURES WITHOUT AN OFF-SITE DETOUR (TRAFFIC STOPPAGES)

- DO NOT STOP TRAFFIC AS FOLLOWS:

I-95 AND I-95 RAMPS/LOOPS MONDAY THRU THURSDAY 5:00 A.M. TO 11:00 P.M. AND FRIDAY 5:00 A.M. TO SUNDAY MIDNIGHT.

THE DURATION OF TRAFFIC STOPPAGES SHALL NOT EXCEED 30 MINUTES.

TRAFFIC STOPPAGES SHALL ONLY BE USED WHEN SPECIFIED IN THE PLANS OR WHEN ALLOWED BY THE ENGINEER.

OPERATIONS THAT ROAD CLOSURES WILL BE ALLOWED:

- BRIDGE DEMOLITION
- GIRDER, OVERHANG, AND FALSEWORK INSTALLATION AND/OR REMOVAL
- INSTALLATION OF OVERHEAD SIGN ASSEMBLIES AND/OR WORK ON EXISTING OVERHEAD SIGN ASSEMBLIES OVER TRAVEL LANES.
- OTHER OPERATIONS DIRECTED BY THE ENGINEER.

HAULING DAY AND TIME RESTRICTIONS

- EXCLUDING HAULING OPERATIONS THAT ARE CONDUCTED ENTIRELY BEHIND A TEMPORARY TRAFFIC BARRIER OR GUARDRAIL, HAULING SHALL NOT BE ALLOWED INGRESS AND EGRESS FROM ANY OPEN TRAVEL LANE DURING THE FOLLOWING TIME RESTRICTIONS:

SINGLE VEHICLE HAULING

- I-95, INCLUDING ALL RAMPS AND LOOPS, MONDAY THROUGH THURSDAY NO RESTRICTIONS ON SINGLE VEHICLE HAULING, USE ACTUATED ADVANCE WARNING SIGNING AND DEVICES.

- I-95, INCLUDING ALL RAMPS AND LOOPS, DO NOT CONDUCT SINGLE VEHICLE HAULING ON FRIDAY, SATURDAY AND SUNDAY 10:00 A.M. TO 4:00 P.M., USE ACTUATED ADVANCE WARNING SIGNING AND DEVICES

MULTI-VEHICLE HAULING

- I-95, INCLUDING ALL RAMPS AND LOOPS, DO NOT CONDUCT MULTI-VEHICLE HAULING, MONDAY THROUGH THURSDAY NOON TO 6:00 P.M., USE ACTUATED ADVANCE WARNING SIGNING AND DEVICES

- I-95, INCLUDING ALL RAMPS AND LOOPS, DO NOT CONDUCT MULTI-VEHICLE HAULING, FRIDAY, SATURDAY AND SUNDAY 10:00 A.M. TO 7:00 P.M., USE ACTUATED ADVANCE WARNING SIGNING AND DEVICES

GENERAL NOTES