DocuSign Envelope ID: 82883083-258A-4D0B-A317-D4591B01B125

PROJECT REFERENCE NO.	SHEET NO.
I-5878/I-5883/I-5986B	TMP-2A

NORTH CAROLINA PROFESSIONAL SEAL 042065 ENGINEER GEORGE M. KARAGEORGIS
4/8/2021

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Michael Baker INTERNATIONAL

SIGN NUMBER: SP-01
TYPE: A
QUANTITY: 2

SIGN WIDTH: 14′-6″
HEIGHT: 6′-0″
TOTAL AREA: 87.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 2″
RADII: 9″

NO. Z BARS: 2
LENGTH: 166.0

BACKG COLOR: Orange
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT′L: 0.125″ (3.2 mm) ALUMINUM

USE NOTES: 1, 2

1. Legend and border shall be directly applied black non-reflective sheeting.
2. Background shall be NC GRADE B fluorescent orange retroreflective sheeting.

DESIGN BY: BM
CHECKED BY: GK
Mar 07, 2020
PROJECT ID: I-5986B
LOCATION: I-95
DIV: 6

SIGN TO BE PAID FOR UNDER PAY ITEM: WORK ZONE SIGNS (STATIONARY) PAY UNIT: SQUARE FOOT

SUPPORTS: 2 - WOOD 6in X 8in

SUPPORTS AND ANY OTHER INCIDENTALS WILL NOT BE PAID SEPARATELY

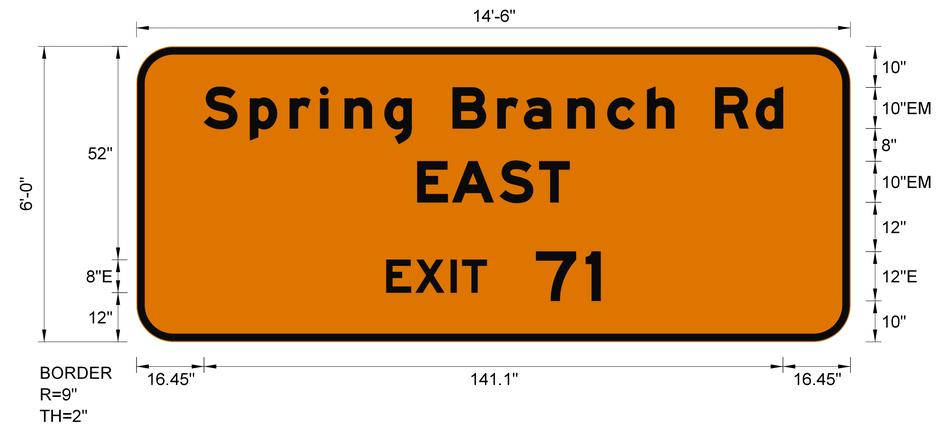

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter locations are panel edge to lower left corner

																										Series/Size Text Length
S	p	r	i	n	g		B	r	a	n	c	h		R	d											EM 2000
16.4	27.6	37.3	44.7	50.7	60.4	67	77	87.9	94.4	105	114.7	124.4	131	141	150.9											141.1
E	A	S	T																							EM 2000
68.5	77	88.6	98.2																							37.1
E	X	I	T	7	1																					E 2000
60.9	68	76.6	79.4	97.4	109.5																					52.2

FILENAME: I-5986B TMP GUIDESIGNS

NORTH CAROLINA D.O.T. SIGN DETAIL

TEMPORARY SIGN DESIGN

4/2/2021
R:\Traffic\Transportation Management\PLAN SHEETS\I-5986B TMP 02A TEMPORARY SIGN DESIGN.dgn
Caroline.Owings