DocuSign Envelope ID: 82883083-258A-4D0B-A317-D4591B01B125

PROJECT REFERENCE NO.	SHEET NO.
I-5878/I-5883/I-5986B	TMP-2A3

NORTH CAROLINA PROFESSIONAL SEAL 042065 ENGINEER GEORGE M. KARAGEORGIS 4/8/2021

DocuSigned by: George Karageorgis 3E8F13B2B0B446...

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Michael Baker INTERNATIONAL

SIGN NUMBER: SP-04
TYPE: A
QUANTITY: 2

SIGN WIDTH: 14′-6″
HEIGHT: 6′-0″
TOTAL AREA: 87.0 Sq.Ft.

BORDER TYPE: FLUSH
RECESS: 0″
WIDTH: 2″
RADII: 9″

NO. Z BARS: 2
LENGTH: 166.0

BACKG COLOR: Orange
COPY COLOR: Black

SYMBOL	X	Y	WID	HT

MAT′L: 0.125″ (3.2 mm) ALUMINUM

DESIGN BY: BM
CHECKED BY: GK
Mar 07, 2020
PROJECT ID: I-5986B
LOCATION: I-95
DIV: 6

SIGN TO BE PAID FOR UNDER PAY ITEM: WORK ZONE SIGNS (STATIONARY) PAY UNIT: SQUARE FOOT

SUPPORTS: 2 - WOOD 6in X 8in

SUPPORTS AND ANY OTHER INCIDENTALS WILL NOT BE PAID SEPARATELY

USE NOTES:

1. Legend and border shall be direct applied black non-reflective sheeting.
2. Background shall be NC GRADE B fluorescent orange retroreflective sheeting.

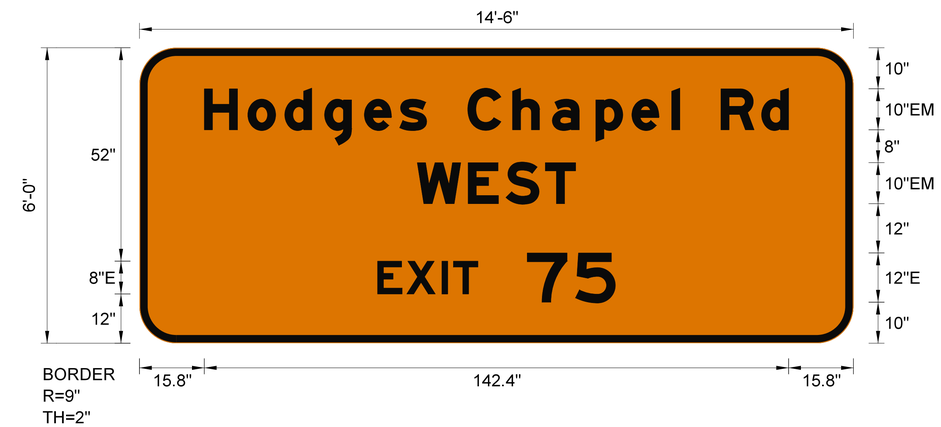

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter locations are panel edge to lower left corner

																										Series/Size Text Length
H	o	d	g	e	s		C	h	a	p	e	l		R	d											EM 2000
15.8	26.4	35.4	45.1	54.8	63.4	70	80	90.9	100.6	111.2	120	129.7	131.7	141.7	151.6											142.4
W	E	S	T																							EM 2000
67.7	80.1	89.3	98.9																							38.6
E	X	I	T	7	5																					E 2000
58	65.1	73.7	76.5	94.5	106.3																					58

FILENAME: I-5986B TMP GUIDESIGNS

NORTH CAROLINA D.O.T. SIGN DETAIL

TEMPORARY SIGN DESIGN

4/2/2021
R:\Traffic\Transportation Management\PLAN SHEETS\I-5986B TMP 02A3 TEMPORARY SIGN DESIGN.dgn
Caroline.Owings