


AREA 1 (I-5878): -Y14- SPRING BRANCH RD & -Y15- US 421



DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

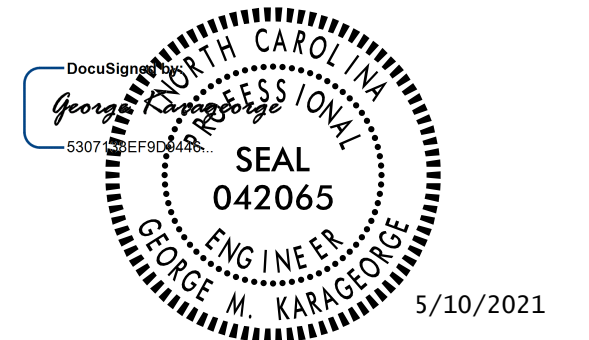

**PHASE II
SPRING BRANCH RD & US 421 INTERCHANGE
TMP-11 TO 11E**

Y14RPA/B/C/D

INTERMEDIATE CONTRACT TIME

COMPLETE **AREA 1 PHASE II SPRING BRANCH RD. AND US 421 INTERCHANGE Y14RPA/B/C/D STEPS 1-4** IN A PERIOD OF ONE HUNDRED TWENTY (120) CONSECUTIVE CALENDAR DAYS AS FOLLOWS:

- 1: IMPLEMENT OFFSITE DETOUR (TMP-A1D6) AND CLOSE EXISTING Y14RPA/B/C/D AND REVISE Y14 ROAD CLOSURE POINTS (TMP-11A, 11D, 11E).
- 2: COMPLETE THE FOLLOWING:
 - Y14 ROUNDABOUTS (TMP-11A)
 - Y14 SPRING BRANCH RD BRIDGE (TMP-11A)
 - REMOVAL OF EXISTING RAMPS (TMP-11A)
 - SBCD (TMP-11A)
 - Y14RPB (TMP-11, 11A)
 - Y14RPC (TMP-11, 11A)
 - NBCD (TMP-11A)
 - I-95 NB/SB OUTSIDE WIDENING (STA. 946+00 TO 962+00 NB/965+00 SB) (TMP-11)
 - Y14 RAMP TERMINALS (TMP-11A)
 - Y14 STA. 15+75 TO 34+50 (TMP-11A, 11D, 11E)
- 3: BEGIN THE FOLLOWING:
 - I-95 NB/SB OUTSIDE WIDENING (STA. 962+00 NB TO 985+00 NB & STA. 965+00 SB TO 981+00 SB) (TMP-11 TO 11B)
- 4: COMPLETE US 421 TIE-INS TO NBCD/SBCD, INSTALL PAVEMENT MARKINGS, AND OPEN Y14 SPRING BRANCH RD/Y15 US 421 (NBCD/SBCD) INTERCHANGE TO THE SPLIT DIAMOND INTERCHANGE PATTERN WHILE SIMULTANEOUSLY CLOSING EXISTING Y15RPC AND TEMPORARY Y15RPB.

FOR THE ABOVE OPERATIONS, USE TEMPORARY LANE CLOSURES (RSD 1101.02) AS REQUIRED.

**PHASE III
I-95 WORK AREAS TMP-12 TO 12F**

CONSTRUCT I-95 SB TEMPORARY ALIGNMENT -TEMP95SB1- (-LREV- STA. 981+00 PROPOSED OUTSIDE WIDENING TYING BACK TO EXISTING I-95SB STA. 990+00) (TMP-12C).

- COMPLETE** THE FOLLOWING:
- I-95 NB OUTSIDE WIDENING:
 - STA. 962+00 TO 985+00 (TMP-12A TO 12C)
 - STA. 1032+00 TO 1061+65 (BEGUN IN PHASE I STEP 6)
 - I-95 SB OUTSIDE WIDENING STA. 965+00 TO 981+00 (TMP-12A TO 12C)
 - STAGE 1 OF I-95 BRIDGE OVER US 421 AND APPROACHES (TMP-12D)
 - CULVERT STAGE 2 STA. 1042+00 (BEGUN IN PHASE I STEP 6)

US 421 INTERCHANGE

UPON OPENING OF Y14 SPRING BRANCH RD/Y15 US 421 TO THE SPLIT DIAMOND INTERCHANGE PATTERN, **REMOVE** EX Y15RPC AND TEMPORARY Y15RPB (TMP-12C, 12D).

COMPLETE I-95 OUTSIDE WIDENING STA. 985+00 TO 1000+00 (TMP-12C TO 12D).

PHASE IV

STEP 1: TMP 13 TO 13K

I-95 WORK AREAS

SHIFT I-95 TO OUTSIDE WIDENING AS SHOWN. **SHIFT** I-95 NB TO STAGE 1 OF I-95 BRIDGE CONSTRUCTION OVER US 421 (TMP-13F) AND CULVERT STAGE 2 STA. 1042+00 (TMP-13).

REMOVE EXISTING I-95 NB BRIDGE AND **CONSTRUCT** STAGE 2 OF I-95 BRIDGE OVER US 421 (TMP-13F).

- COMPLETE** THE FOLLOWING:
- I-95 SB MEDIAN (STA. 970+00 TO 1025+00)

- BEGIN** THE FOLLOWING:
- I-95 MEDIAN (STA. 925+00 TO STA. 1061+65) (TMP-13 TO 13K)
 - CULVERT STAGE 3 STA. 1042+00 (TMP-13I)

STEP 2: TMP 14 TO 14D

I-95 WORK AREAS

INTERMEDIATE CONTRACT TIME

COMPLETE **AREA 1 PHASE IV STEP 2 I-95 WORK AREAS** IN A PERIOD OF TEN (10) CONSECUTIVE WEEKNIGHTS AS FOLLOWS:

- UNDER NIGHTLY CLOSURES OF I-95 SB (SUNDAY THROUGH THURSDAY), COMPLETE THE FOLLOWING:
 - I-95 SB (STA. 1009+00 TO 1025+00) WEDGING/PAVING (TMP-14C, 14D)
 - DURING THE FINAL NIGHTLY CLOSURE, REVISE PAVEMENT MARKINGS AS SHOWN IN PHASE V TRAFFIC SWITCH AND OPEN I-95 SB ONTO PROPOSED INSIDE (STA. 981+00 TO 1017+50), STAGE 2 OF I-95 BRIDGE OVER US 421, AND TEMPORARY ALIGNMENT TEMP_95SB2 (TMP-15A TO 15C).

APPLY I-95 SB "ROAD CLOSURE TYPICAL" TMP-2B AND DETOUR TMP-A1D7 OV.

PHASE V

I-95 WORK AREAS TMP 15 TO 15D

UPON SHIFTING I-95 SB ONTO PROPOSED INSIDE SHOULDER AND TEMP_95SB2 (STA. 981+00 TO 1017+50), **COMPLETE** THE FOLLOWING:

- REMOVAL OF EXISTING I-95 SB BRIDGE OVER 421 (TMP-15B)
- I-95SB STA. 981+00 TO 1013+60 (TMP-15A TO 15C)

US 421 INTERCHANGE

UPON REMOVAL OF EXISTING I-95 SB BRIDGE OVER US 421, **REMOVE** PCB ALONG Y15 US 421 AND **COMPLETE** CONSTRUCTION OF PROPOSED Y15 OUTSIDE SHOULDERS AND WEDGING/RESURFACING (TMP-15B).

FOR THE ABOVE OPERATIONS, USE TEMPORARY LANE CLOSURES (RSD 1101.02) AS REQUIRED.

PHASE VI

I-95 WORK AREAS TMP 16 TO 16E

SHIFT I-95 SB ONTO NEWLY CONSTRUCTED OUTSIDE WIDENING STA. 981+00 TO 1017+50 AND **COMPLETE** THE FOLLOWING (TMP-16A TO 16C):

- I-95 MEDIAN (BEGIN PROJ TO STA. 1061+65)
- CULVERT STAGE 3 STA. 1042+00 (TMP-16E)

US 421 INTERCHANGE

COMPLETE CONSTRUCTION OF PROPOSED Y15 MEDIAN ISLANDS UNDER I-95 BRIDGE OVER US 421 (TMP-16B).

FOR THE ABOVE OPERATION, USE TEMPORARY LANE CLOSURES (RSD 1101.02) AS REQUIRED.

UPON COMPLETION OF ALL MEDIAN CONSTRUCTION THROUGHOUT THE ENTIRE PROJECT, PAVE THE FINAL SURFACE COURSE, INSTALL FINAL PAVEMENT MARKINGS, REMOVE ALL TRAFFIC CONTROL DEVICES, AND OPEN I-95 TO FINAL TRAFFIC PATTERN.

PHASING NARRATIVE
AREA 1