


AREA 3: -Y29- S MARKET ST / CUB RD

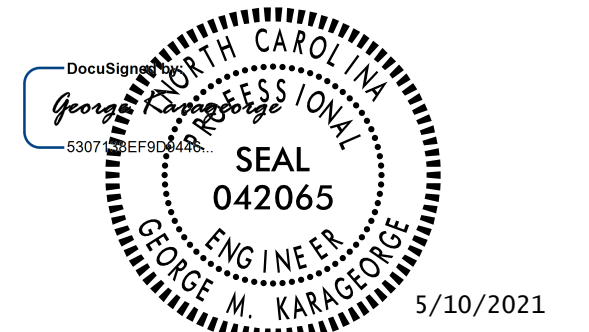

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

**Michael Baker
INTERNATIONAL**

INTERMEDIATE CONTRACT TIME

COMPLETE THE WORK OF AREA 3 PHASES I THRU III IN ACCORDANCE WITH INTERMEDIATE CONTRACT TIMES AND LIQUIDATED DAMAGES

PHASE I

STEP 1: TMP- 28 TO 28C

REPLACE I-95 NB/SB OUTSIDE EXISTING SHOULDERS FROM STA. 1286+00 TO STA. 1304+00 WITH TEMPORARY PAVEMENT AND IN A CONTINUOUS OPERATION, SHIFT I-95 NB/SB TO OUTSIDES AND INSTALL PCB ALONG INSIDE EDGE.

WITH I-95 NB/SB TRAFFIC SHIFTED TO OUTSIDE, **PERFORM** THE FOLLOWING:

- **CONSTRUCT** Y29 BRIDGE MEDIAN BENT
- **BEGIN** END BENT 1

BEGIN THE FOLLOWING:

- S MARKET ST Y29
- CUB RD SERVICE ROAD Y29A

FOR THE ABOVE OPERATIONS, USE TEMPORARY LANE CLOSURES (RSD 1101.02) AS REQUIRED. FOR S. MARKET ST. A ROAD CLOSURE WILL ALSO BE REQUIRED AS SHOWN ON THE DETAIL SHEETS AND RSD 1101.03.

STEP 2: TMP- 29 TO 29B

CONSTRUCT 8' TEMPORARY PAVEMENT ALONG I-95 NB/SB INSIDE SHOULDERS FROM STA. 1286+00 TO STA. 1312+00 AND **INSTALL** ANCHORED PCB.

FOR THE ABOVE OPERATIONS, USE TEMPORARY LANE CLOSURES (RSD 1101.02), AS REQUIRED.

PHASE II TMP- 30 TO 30C

SHIFT I-95 NB/SB TO INSIDE MEDIAN TEMPORARY PAVEMENT AND BEHIND PCB, **BEGIN** I-95 NB/SB OUTSIDE WIDENING STA. 1286+00 TO STA. 1312+00.

COMPLETE THE FOLLOWING:

STEP 1: OPEN CUB RD SERVICE ROAD Y29A TO TRAFFIC, AND CLOSE EXISTING CUB RD.

STEP 2: WITH CUB RD TRAFFIC ON Y29A AND MARKET ST. CONTINUED TO BE CLOSED, COMPLETE CONSTRUCTION OF Y29 BRIDGE AND APPROACHES (REFER TO TMP-A3D1 DETOUR OVERVIEW)

PHASE III TMP- 31

OPEN CUB RD / S MARKET ST Y29 TO TRAFFIC.

CONTINUE CONSTRUCTION OF I-95 OUTSIDE WIDENING.

PHASE IV TMP- 32 TO 32B

COMPLETE I-95 NB/SB OUTSIDE WIDENING STA. 1286+00 TO STA. 1312+00 AND UPON COMPLETION OF AREAS 2, 3, 4, AND 5 OUTSIDE WIDENING, SHIFT ALL I-95 NB/SB TO NEWLY CONSTRUCTED OUTSIDE WIDENING AND **CONSTRUCT** I-95 PROPOSED MEDIAN.

UPON COMPLETION OF ALL MEDIAN CONSTRUCTION THROUGHOUT THE ENTIRE PROJECT, PAVE THE FINAL SURFACE COURSE, INSTALL FINAL PAVEMENT MARKINGS, REMOVE ALL TRAFFIC CONTROL DEVICES, AND OPEN I-95 TO FINAL TRAFFIC PATTERN.

PHASING NARRATIVE

AREA 3