



DRAWING 1

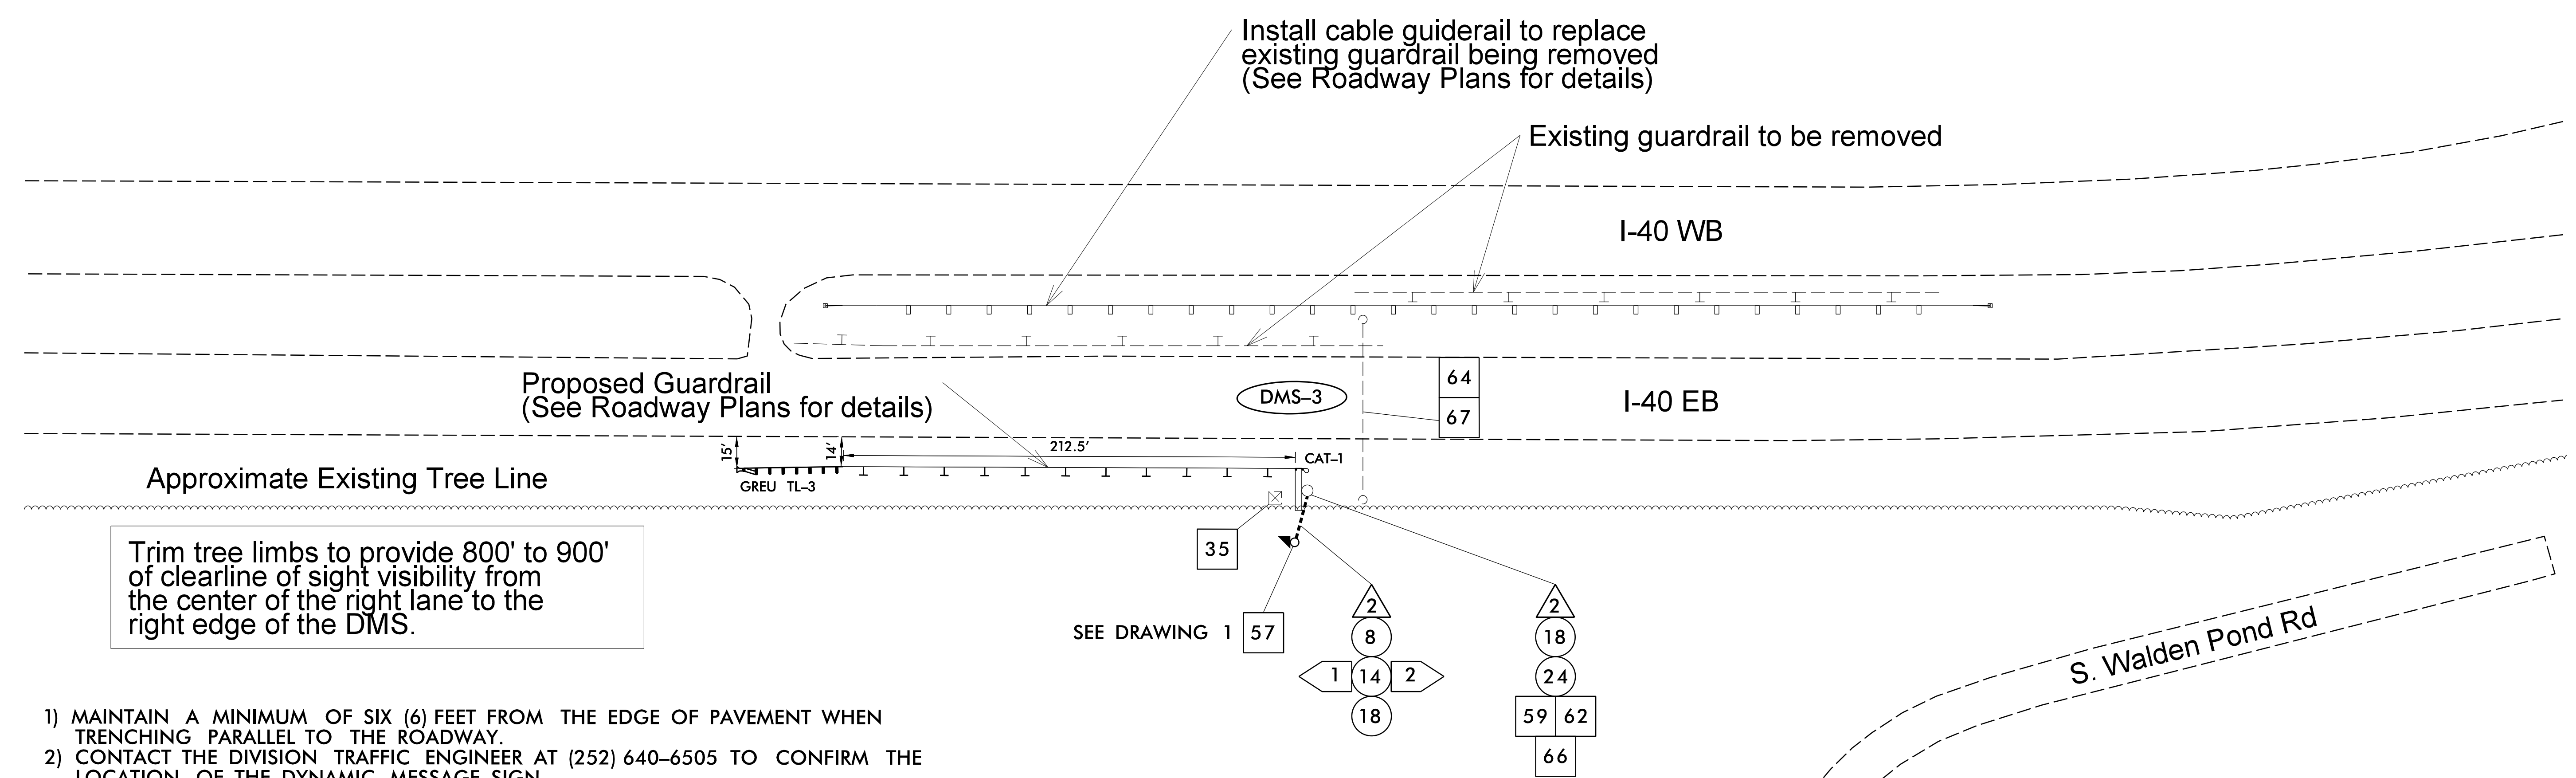

- 1) MAINTAIN A MINIMUM OF SIX (6) FEET FROM THE EDGE OF PAVEMENT WHEN TRENCHING PARALLEL TO THE ROADWAY.
- 2) CONTACT THE DIVISION TRAFFIC ENGINEER AT (252) 640-6505 TO CONFIRM THE LOCATION OF THE DYNAMIC MESSAGE SIGN.
- 3) DO NOT INSTALL CONDUIT OR JUNCTION BOXES UNTIL THE LOCATION OF THE DYNAMIC MESSAGE SIGN HAS BEEN CONFIRMED BY THE DIVISION ITS ENGINEER.
- 4) INSTALL THE DMS CABINET ASSEMBLY A MINIMUM OF 30' FROM THE ROADWAY EDGE OF TRAVEL OR INSTALL GUARDRAIL AS NEEDED.
- 5) IT IS THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN THE AVAILABLE FAULT CURRENT INFORMATION FROM THE POWER COMPANY FOR THE REQUIRED ELECTRICAL SERVICE AND PLACE A "FAULT CURRENT" STICKER INSIDE THE SERVICE DISCONNECT PANEL WITH THE DATE AND AVAILABLE FAULT CURRENT ON THE STICKER.
- 6) AT THE DIRECTION OF THE ENGINEER, PERFORM GRADING AS NEEDED WHERE GUARDRAIL, POLE INSTALLATION AND DMS CONSTRUCTION WORK HAS BEEN PERFORMED.
- 7) RETURN EXISTING DMS EQUIPMENT INCLUDING CELL MODEMS TO THE NCDOT DIVISION 4 TRAFFIC SERVICES OFFICE AT 509 WARD BLVD, WILSON, NC 27895. CONTACT ANDY BROWN AT (252) 640-6505 TWO WEEKS IN ADVANCE TO COORDINATE DELIVERY.
- 8) NCDOT DIVISION 4 WILL FURNISH DMS CELL MODEM. CONTACT THE ENGINEER SIX (6) WEEKS PRIOR TO BEGINNING WORK.
- 9) CONTRACTOR SHALL CLOSE LANE(S) AS NEEDED, UTILIZING STD. 1101.02 SHEETS 5 AND 6, DURING THE REMOVAL OF EXISTING DMS AND INSTALLATION OF NEW DMS.

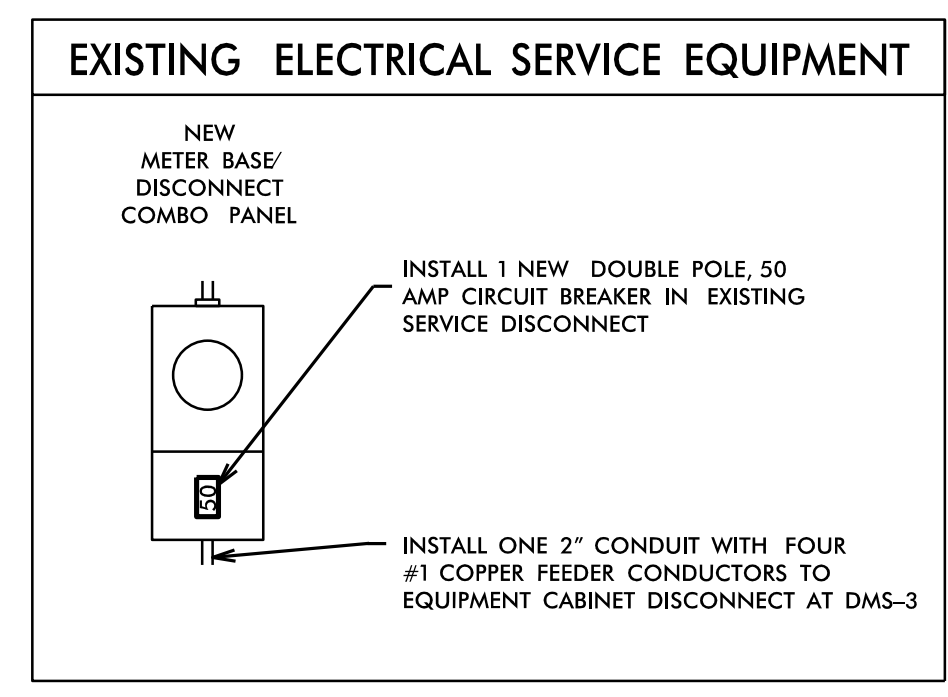

<p>Prepared For:</p> <p>750 N. Greenfield Place, Garner, NC 27529</p> <p>SCALE: 0 40</p>	<p>I-40 MM 324 EB DMS</p>		<p>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</p> <p>SEAL</p> <p>William J. Hamilton 3/26/2021</p>					
	<p>PLAN DATE: March 2021</p> <p>PREPARED BY: A. Andrews</p>	<p>REVIEWED BY: WJ Hamilton</p> <p>RKA PROJ. NO.: 18132 (040)</p>		<table border="1"> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </table>	REVISIONS	INIT.	DATE	
REVISIONS	INIT.	DATE						